



# Logitech G602 Motherboard Replacement

This guide will teach you how to fully...

Written By: Jerico Morales



# INTRODUCTION

This guide will teach you how to fully deconstruct the mouse and remove the green motherboard.

## TOOLS:

Phillips #00 Screwdriver (1)  
iFixit Opening Tool (1)

## PARTS:


Logitech G602 Motherboard (1)

## Step 1 — Motherboard



- Use a spudger to pry off all 4 mouse feet from under the mouse.

## Step 2

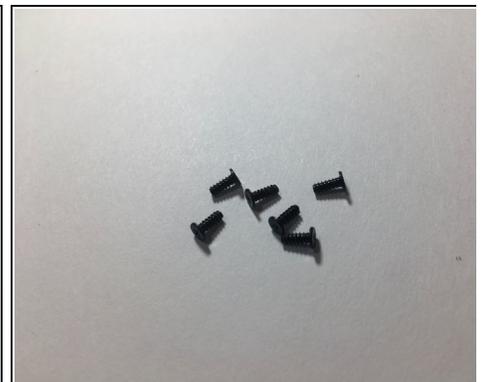

- Use a Phillips #00 screwdriver to unscrew all 6 screws (3x5mm) from under the mouse feet.

### Step 3




- Use the blue spudger to prop open the battery port.

### Step 4




- Remove the two AA batteries from the device.

## Step 5

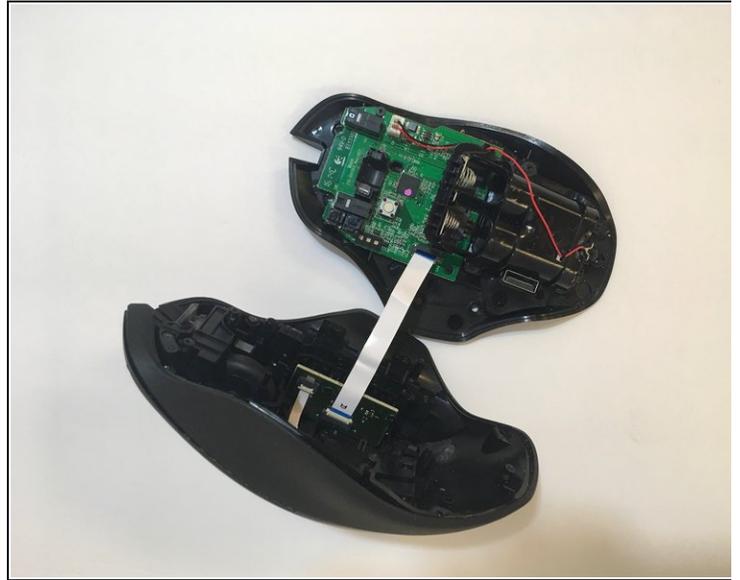


- Lift the top of the mouse from the base of the mouse (separate mouse in half) to expose the mouse's internal hardware.

## Step 6

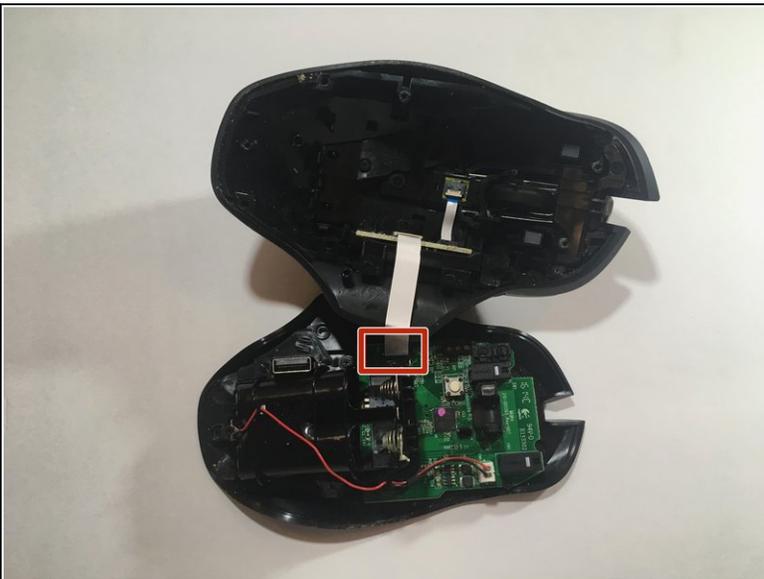



- Use tweezers to grip and detach the white ribbon cable from the motherboard.

## Step 7

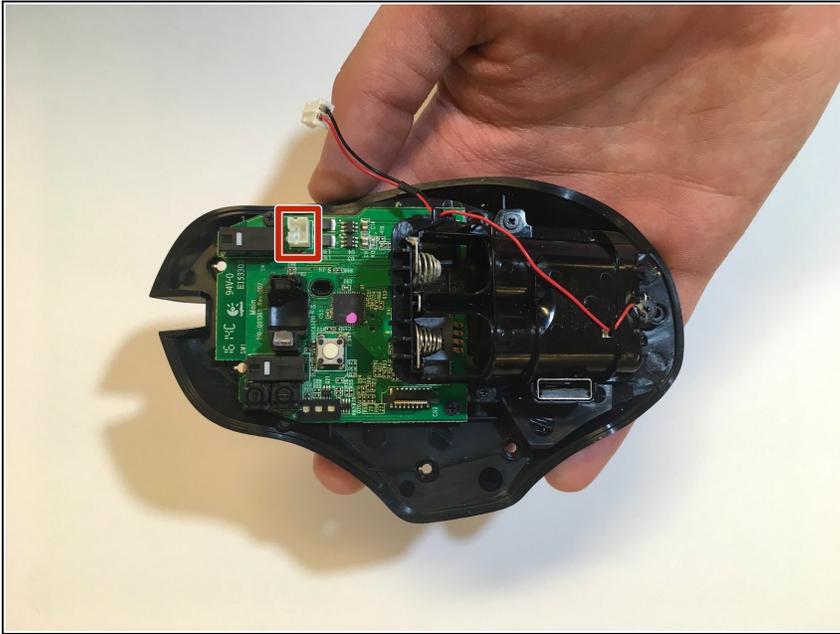


- Use pliers to detach the white plug from the motherboard.

## Step 8

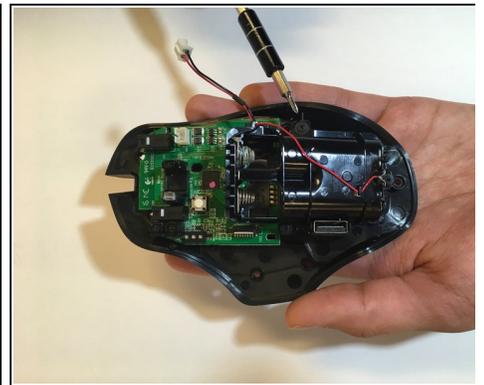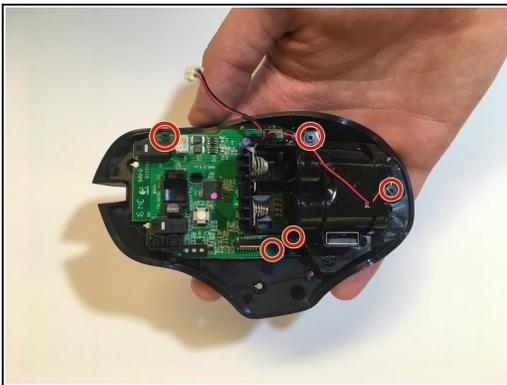

- Use a Phillips #00 screwdriver to unscrew all 5 screws (3x5mm ) from the battery pack and motherboard.

## Step 9

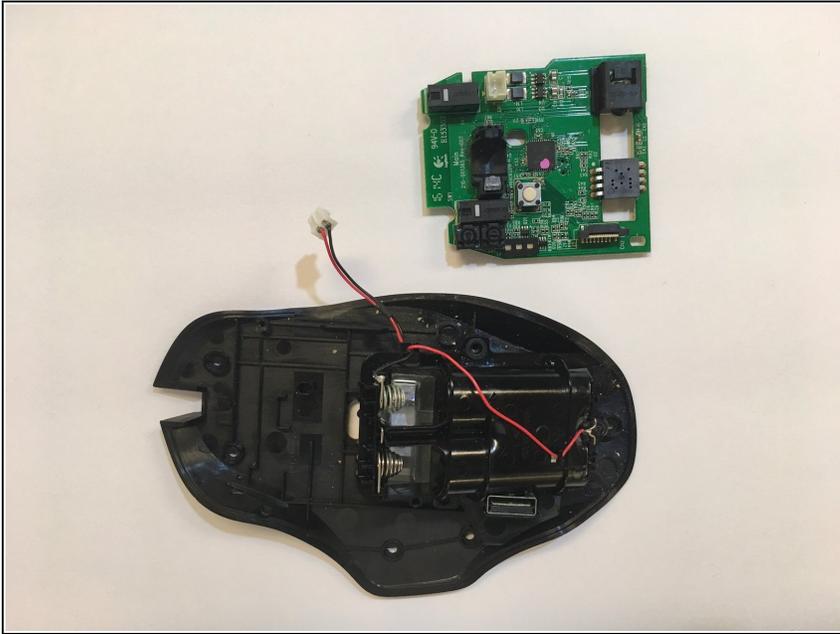

- Remove the motherboard from the mouse.

---

To reassemble your device, follow these instructions in reverse order.