


Canon EOS 30 Battery Door Replacement

This fix is safe and only requires a screwdriver.

Written By: Jackie

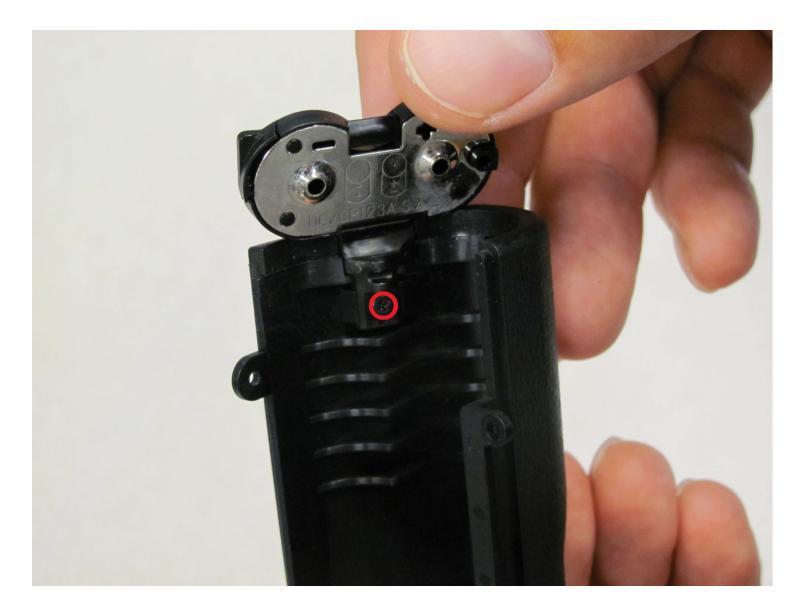

INTRODUCTION

This fix is safe and only requires a screwdriver.



Phillips #00 Screwdriver (1)

Step 1 — Front Panel



• Remove the two 4.8 mm black screws above the lens on the front of the camera.



 Remove the 4.3 mm black screw under the lens ring, and the 4.8 mm black screw under the camera.

Step 3



• Remove the 4.8 mm black screw on the left side of the camera.



• Remove the front panel by lifting it away from the camera's body.

Step 5 — Bottom Panel



• Remove seven 4.25 mm black screws on the bottom panel.



• Remove the bottom panel.

Step 7 — Side Panel With Remote Control Socket



• Remove two 6.5 mm black screws from the panel.




 Remove the plastic remote control socket cap by pulling it straight out.

Step 9




• Slide the panel toward the bottom of the camera to remove.

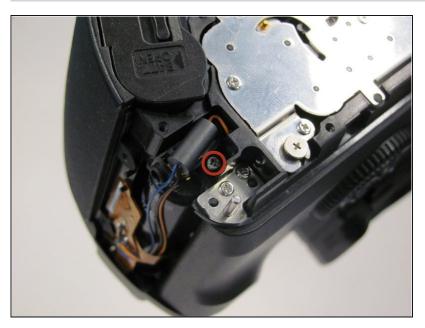

• Remove the single 4.8 silver screw from the control socket.

Step 11

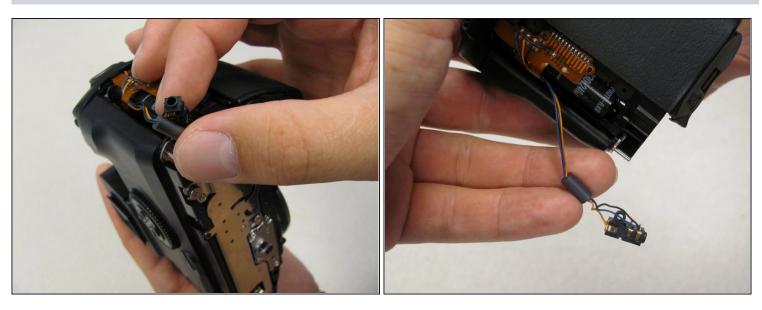

(i) The control socket is now secure by three wires.

• <u>Desolder</u> connections to replace the remote control socket.

Step 12 — Top Panel



• Slide the outer eyepiece upward to remove it.

Step 13



• Remove the two 4.75 mm black screws located on the top of the camera.



 Remove the four 4.3 mm black screws near the bottom corners of the eyepiece at the back of the camera.

Step 15



• Slowly separate the top panel from the camera by pushing it upward.

A Separating the top panel too far or quickly can damage the ribbon cable and connecting wires that are still attached to the top panel of the camera.

Step 16 — Grip



• Remove the two 5.5 mm screws from front of camera.

Step 17



• Remove grip panel.

Step 18 — Battery Door



• Remove one black screw from battery door on underside of grip.

Step 19



• Remove battery door.

To reassemble your device, follow these instructions in reverse order.