




Left Joy-Con Joystick Replacement

The Nintendo Switch comes with two Joy-Con...

Written By: Taylor Dixon

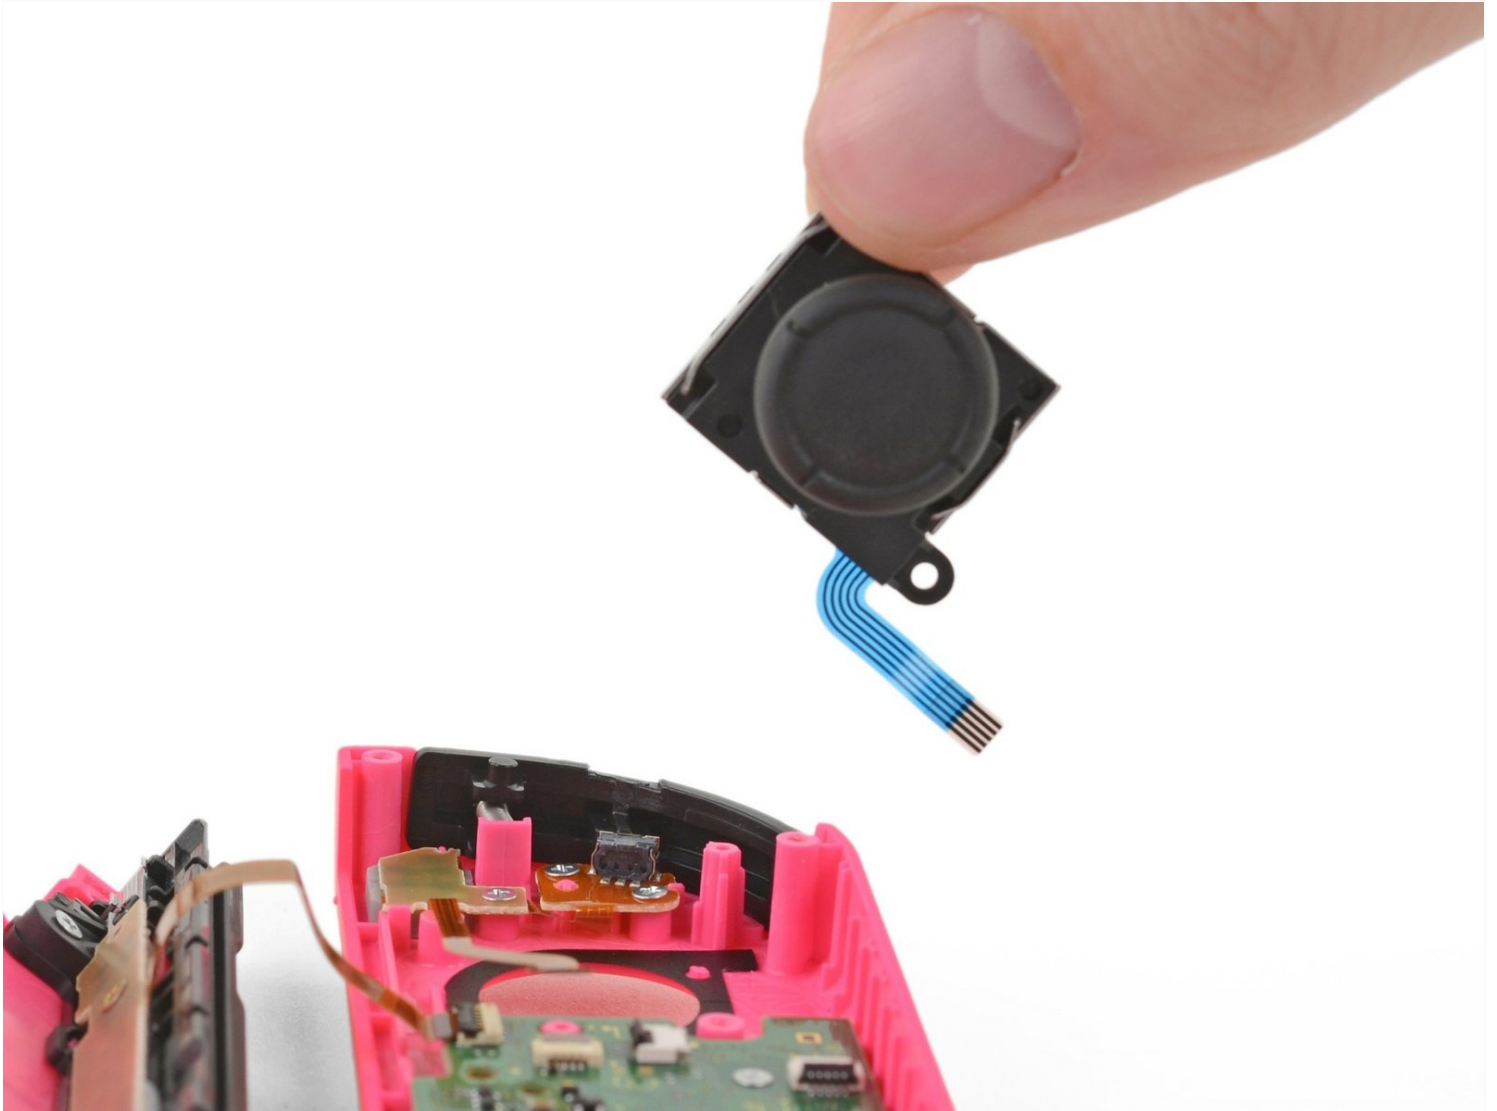

INTRODUCTION

The Nintendo Switch comes with two Joy-Con controllers. This guide shows how to replace the joystick of the **left** Joy-Con. The procedure for [repairing the right Joy-Con](#) is different, so be sure to follow the correct set of instructions for your controller.

TOOLS:

Spudger (1)
Tweezers (1)
1 x Opening Picks (1)
Tri-point Y00 Screwdriver (1)
Phillips #00 Screwdriver (1)

PARTS:

Nintendo Switch Joy-Con/Switch Lite -
Gulikit Hall Effect Joystick (1)
Nintendo Switch Joy-Con/Switch Lite
Joystick (1)

Step 1 — Left Joystick



- Remove the four Tri-Point Y00 screws from the back panel of the Joy-Con.
 - ⓘ These screws are each 6.2 mm long, but it's still a good idea to [keep them organized](#) and make sure they go back in their proper places!

Step 2



- Insert an opening pick into the seam at the bottom edge of the controller (opposite the L and ZL buttons).
- Slowly slide the flat edge of your opening pick up the side of the Joy-Con.
 - ⓘ Be careful not to slide the opening pick too far inside the Joy-Con. This may damage the inner components. The back panel loosens fairly easily, so not much pressure is needed.

Step 3



- With the charging rail facing away from you, open the the Joy-Con like a book.


⚠ Don't try to fully remove the back panel yet. There are still two cables connecting the charging rail to the motherboard.

Step 4




- Use a spudger to gently pry the battery connector straight up from its socket on the motherboard. This will keep the Joy-Con from powering on during the repair.
⚠ Be very careful as you pry up the connector—if it doesn't come up with the spudger, try gently pulling the cables straight up from the board to disconnect it.
- ☑ During reassembly, press the connector straight down into its socket on the board to reconnect the battery.

Step 5

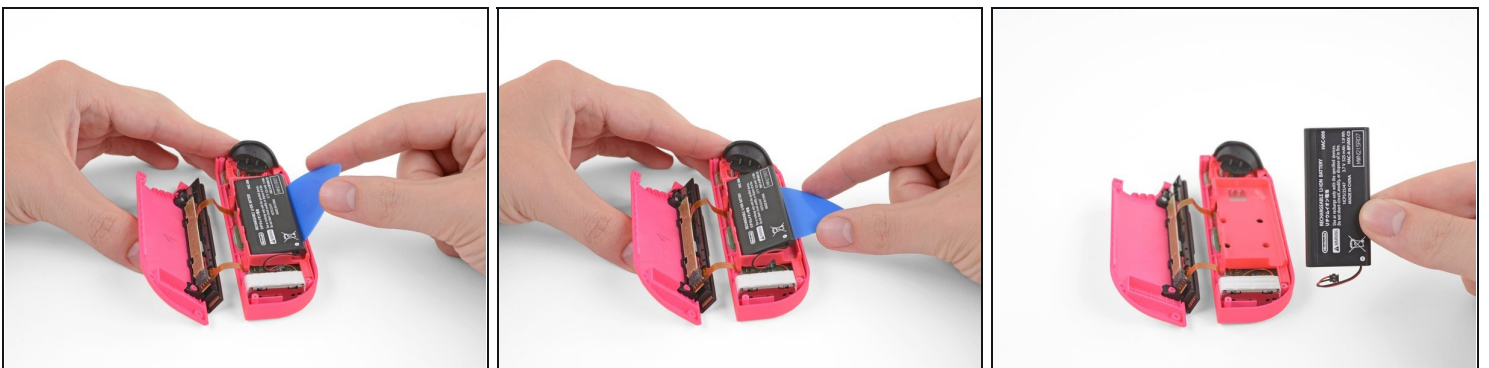

- Insert an opening pick between the battery and the Joy-Con housing.
 - Gently pry out the battery, which is lightly taped in place.
- ⚠ Be careful not to deform or puncture the battery—it can catch fire or explode if damaged.**


Step 6

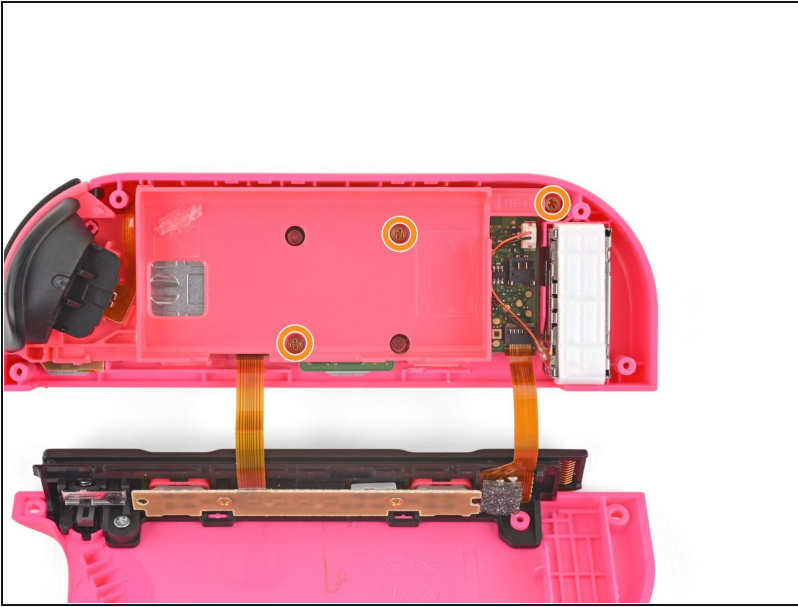

- Remove the three 3.5 mm golden Phillips #00 screws from the midframe.

⚠ **Do not attempt to remove the midframe yet.** There is a fragile cable that still connects the ZL button on the midframe to the motherboard underneath.


Step 7

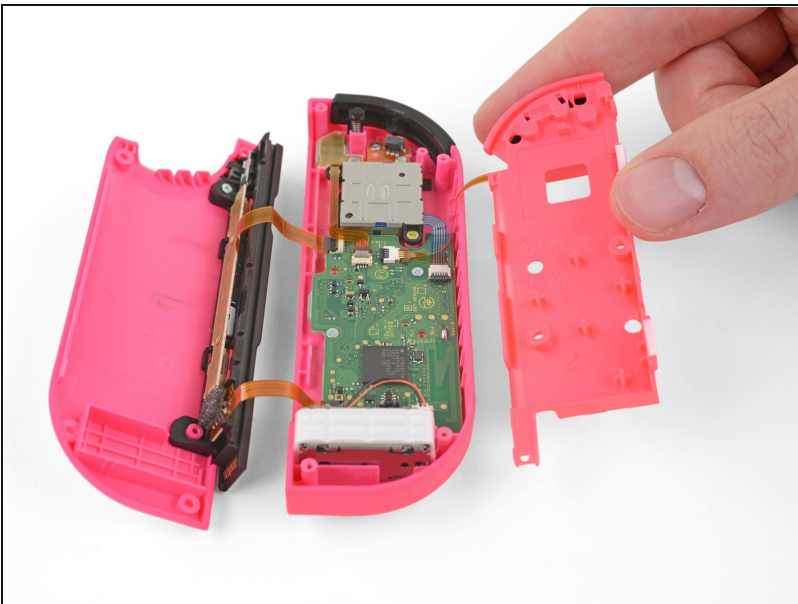

- Carefully flip the midframe over, away from the motherboard, as if you were turning the page of a book.


⚠ **Do your best not to stress the thin ribbon cable attached to the ZL button during this step.**

Step 8

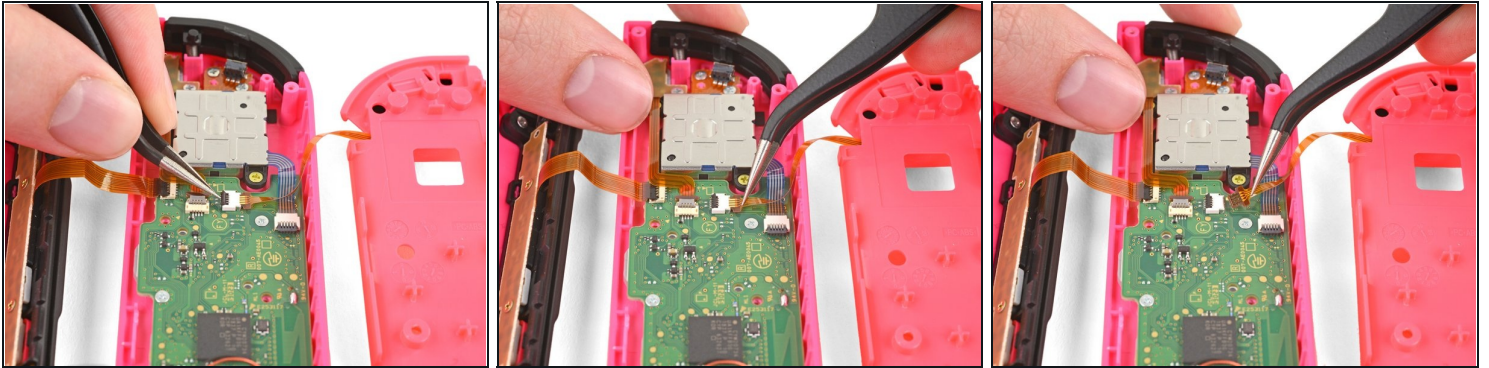

- The ZL button cable is locked in place by a small [ZIF connector](#) on the motherboard. Use [tweezers](#) or a spudger to flip up the ZIF connector lock opposite the cable.
- Use tweezers to gently pull the ZL button flex cable out of the ZIF connector socket. The midframe is now disconnected and can be removed.

Step 9

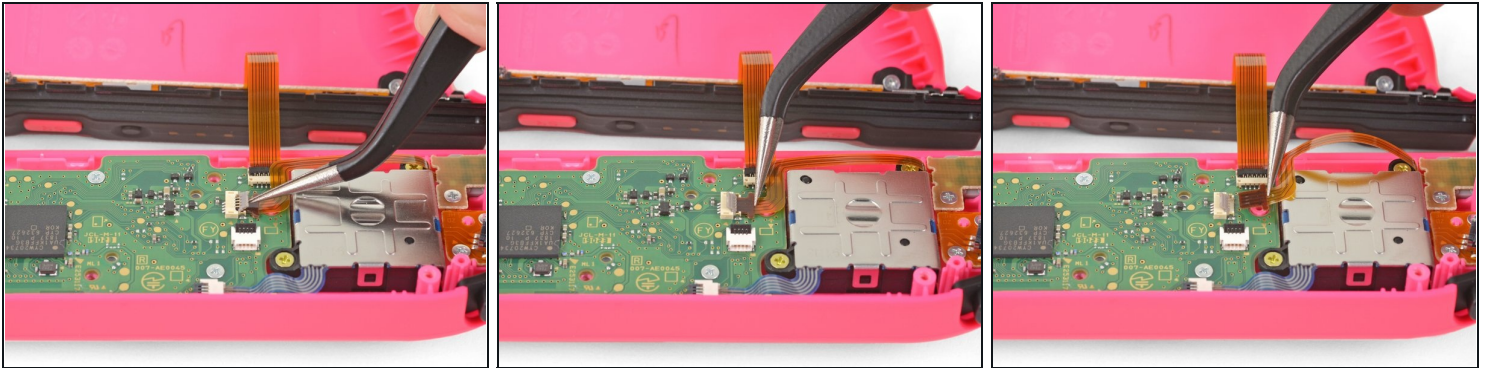


- ① The ribbon cable connecting the minus button of the Joy-Con to the motherboard runs over the back of the joystick. It is possible to remove the joystick without disconnecting this cable, but it's much easier to do so when it is disconnected and out of the way.
- Unlock the minus button's ZIF connector and disconnect the cable.

Step 10




- Finally, the joystick is locked into place by one last ZIF connector. Carefully flip the ZIF lock upward and disconnect the cable.

Step 11

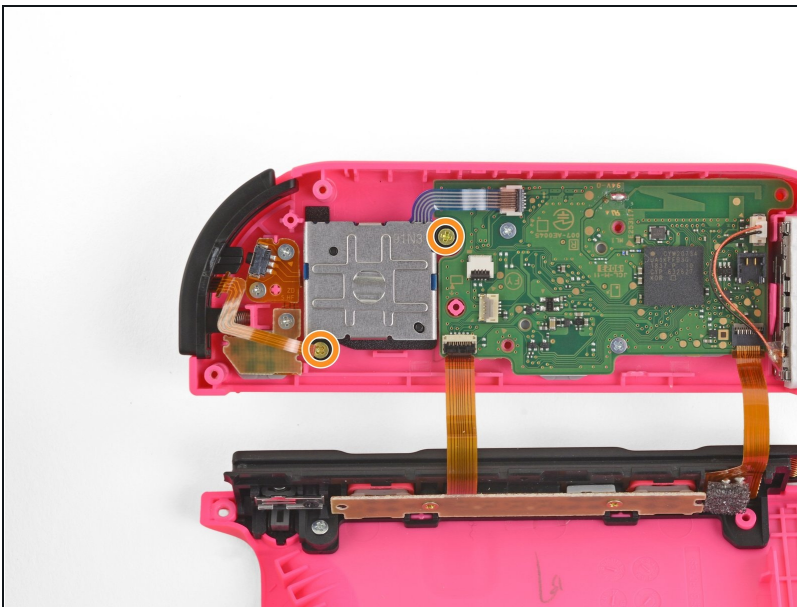

- Remove the two 3.5 mm Phillips #00 screws from the joystick.

Step 12

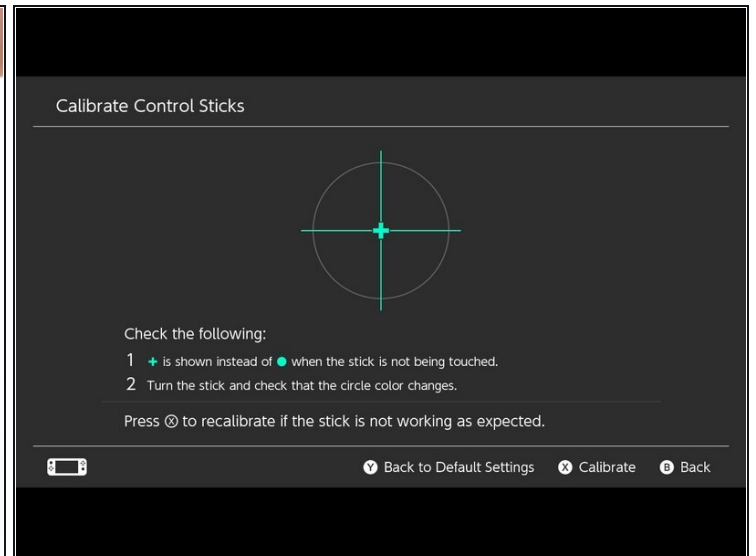

- Carefully remove the joystick from its housing.
- ⓘ There is a thin black gasket around the hole where the joystick pokes through the Joy-Con. Do your best not to disturb this gasket as you remove the joystick!
- ★ Once the Joy-Con is fully reassembled, connect it to your Nintendo Switch and [calibrate the new joystick](#). Additionally, you may need to power cycle your Switch by holding down the power button for 10-15 seconds until it turns off, then turning it back on.

To reassemble your device, follow the above steps in reverse order.

Take your e-waste to an [R2 or e-Stewards certified recycler](#).

Repair didn't go as planned? Check out our [Answers community](#) for troubleshooting help.