



FAO Schwarz Apex 1 Wheel Replacement

Replace a damaged or punctured wheel to restore mobility to your Apex 1 car.

Written By: April Wilson



INTRODUCTION


Is your FAO Schwarz Apex 1 failing to take turns and drift correctly? This guide will show you how to replace a wheel on your Classic Racer and correct any unwanted device maneuvering caused by a faulty wheel. All this simple fix requires is a J1 screwdriver bit to remove and reinstall the screws holding the wheel on.



TOOLS:

- [JIS #1](#) (1)
-

Step 1 — Wheel

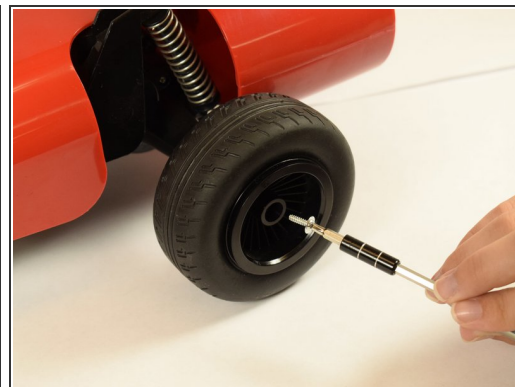

- Position device so that the wheels are on a firm surface .
- Using a J1 Screwdriver bit, remove the 11 mm screw from the center of the wheel.

Step 2



- After removing the 11 mm screw, firmly grip the wheel and pull away from the vehicle.

To reassemble your device, follow these instructions in reverse order.