



Removing Saeco Vienna Sup 018 Top Cover

Removing Saeco Vienna Sup 018 Top Cover

Written By: VauWeh



INTRODUCTION

If you have to repair inner components you first must open the top cover.



TOOLS:

- [T10 Torx Screwdriver](#) (1)
 - [Phillips #1 Screwdriver](#) (1)
-


Step 1 — Removing Saeco Vienna Sup 018 Top Cover



⚠ Never forget: Pull the plug out!


- Remove all attachments such as drawers, water tank, brewing unit.
- Carefully pull the steam button out. If it is too tight, first loosen the cover (steps 2 to 4), lift slightly and then push the ratchet nose with a small screwdriver.

Step 2

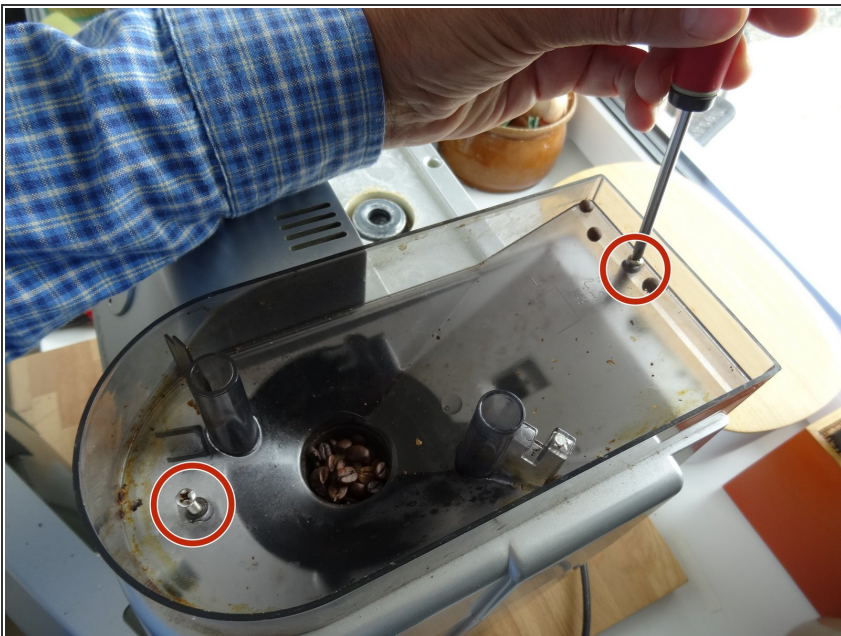

- The bean container is fixed with two Phillipps screws. Unscrew those.
- ⓘ The adjusters of the grinder and the quantity of coffee (if present) can remain.
- Lift the bean container up und remove it from the device.

Step 3

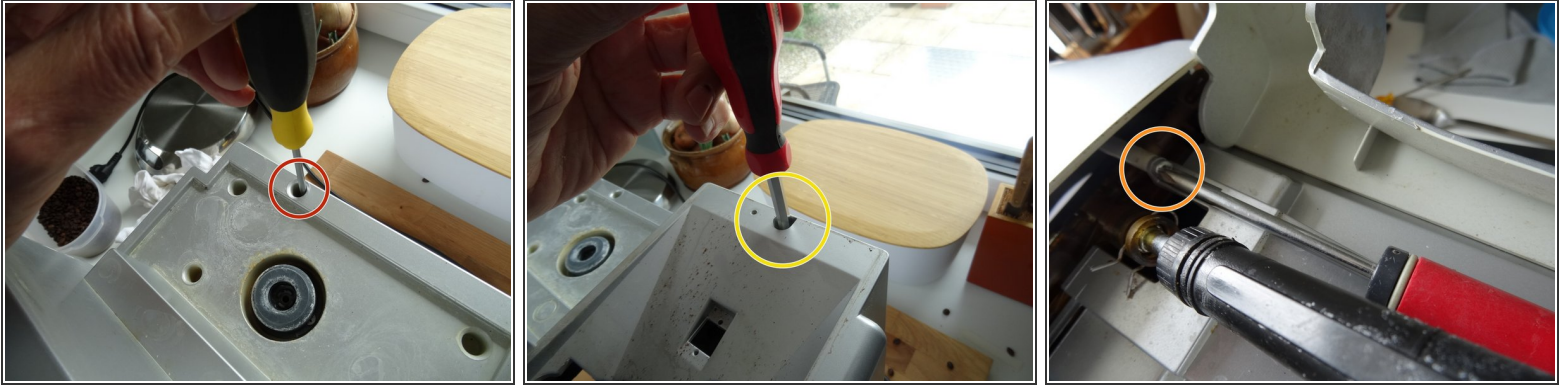

- Remove the single T10 Torx screw on the rear edge of the top cover under the water reservoir.
- Remove the single Phillips screw on the rear edge of the top cover under the container of the coffee beans.
- There are two Phillips screws on the frontal underside edge of the top cover. Turn them out.

Step 4



- Now the cover can be lifted off. Pull backwards, then diagonally forward. Remove the silicone hose from the water tank.

To reassemble your device, follow the above steps in reverse order.