



# ASUS Q400A-BHI7N03 Screen Replacement

Replacing Asus Q400 screen.

Written By: Wan Ahmad Aiman



---

## INTRODUCTION

If the screen is damaged, or has an incorrect display, it should be replaced. The following is a comprehensive guide for replacing the screen.

---

### TOOLS:


- [Phillips #0 Screwdriver](#) (1)
  - [Spudger](#) (1)
-

## Step 1 — Screen




- Flip the laptop on its back side with the battery facing toward you.
- Slide the tabs with lock/unlock symbol, to the unlock position.
- Grabbing the top edge of the battery, lift upward to relieve the battery from its slot.

## Step 2

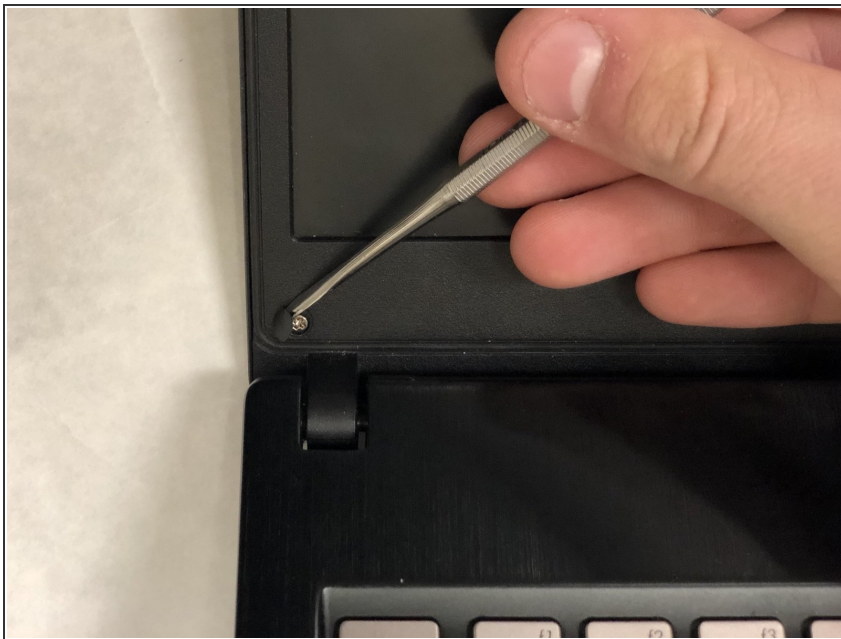

- Lift the two black plastic circles off the screen using the plastic spudger.
- Unscrew the two 8mm Phillips #0 screws.

### Step 3

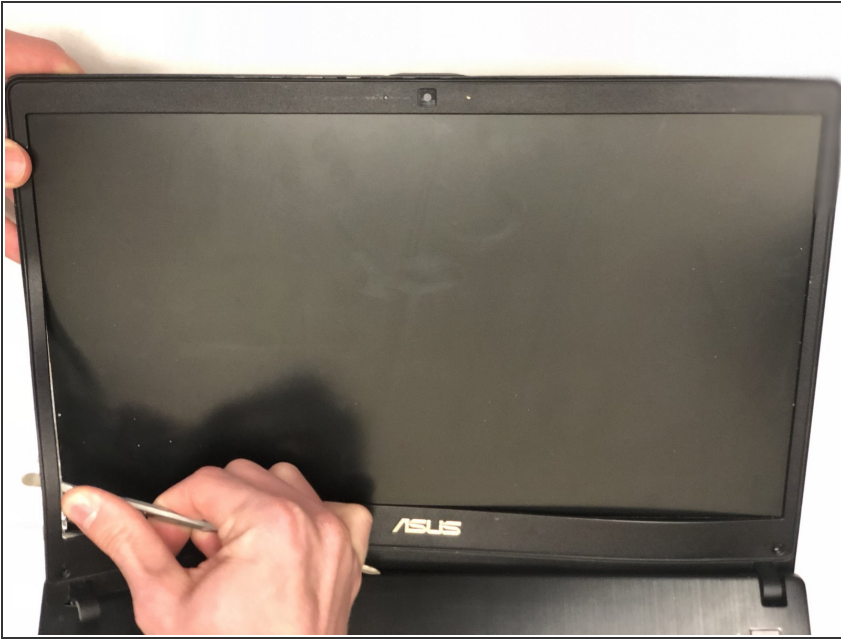

- Pry the front edges of the screen using the spudger.

### Step 4



- Remove the four black 8mm Phillips #0 screws and set them aside.




## Step 5



- Pry the LCD from the front frame.

## Step 6

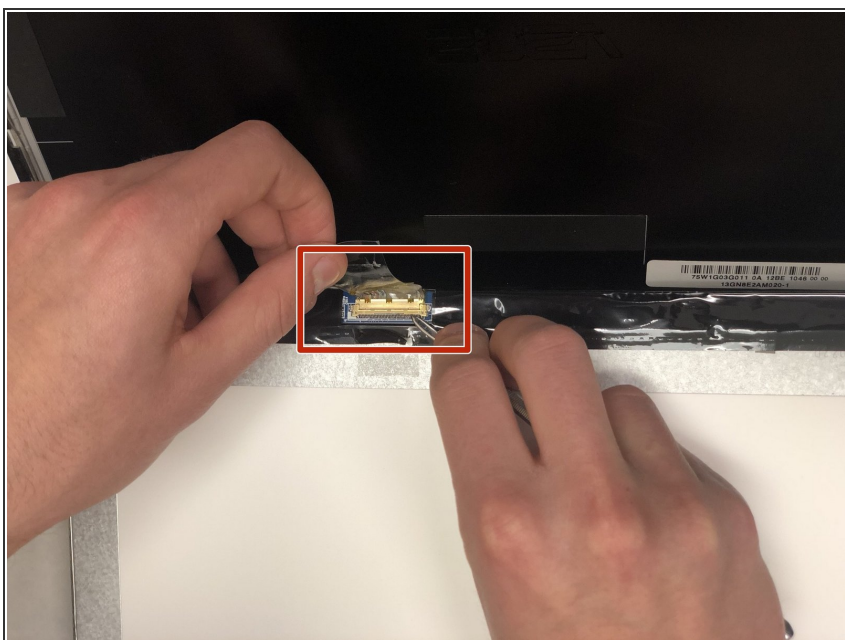

- Pull the gold ribbon cable to disconnect the screen from the laptop.

To reassemble your device, follow these instructions in reverse order.