




1992-1996 Ford F series-Bronco Header Panel Replacement

How to replace a 1992-1996 Ford F series-Bronco header panel.

Written By: Madison Whitcraft

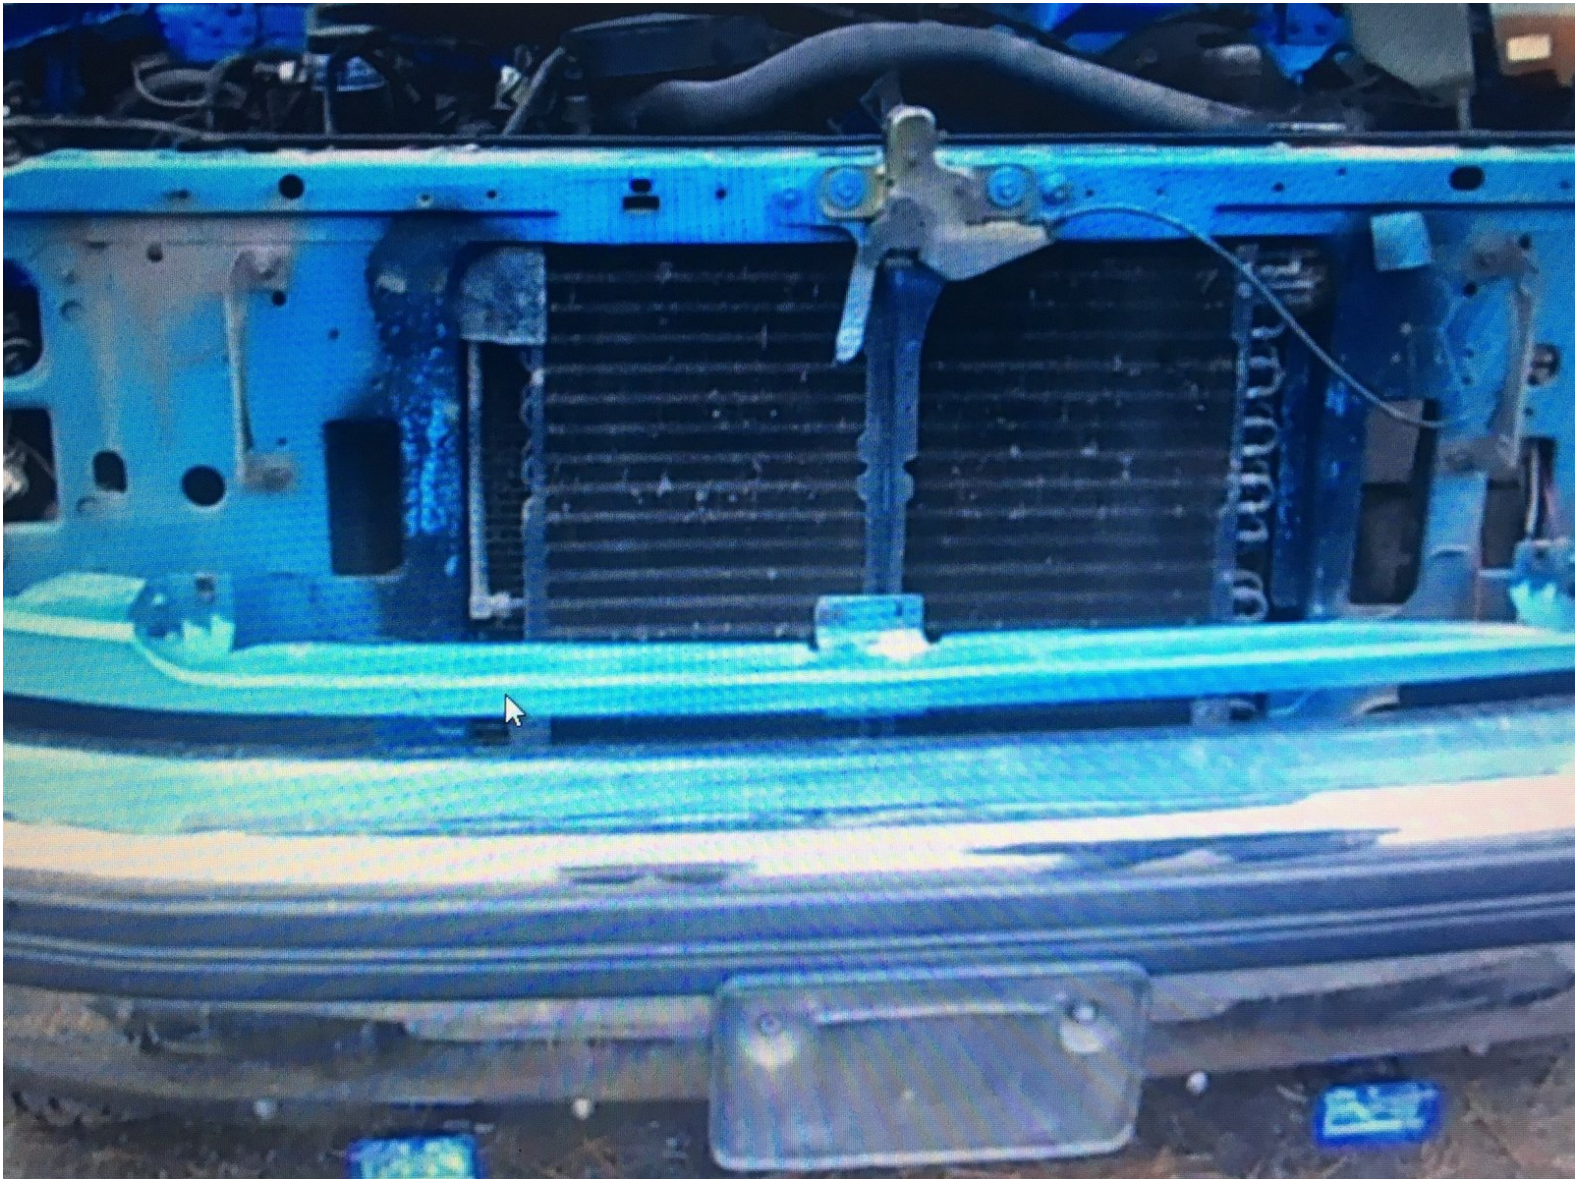

INTRODUCTION


In this guide, you will need very few tools to replace your header panel. This is a fast, and safe way to replace your header panel. Out of caution, before completing make sure your vehicle is shut off, and your emergency break is applied.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [8 mm socket](#) (1)
 - [11 mm Socket](#) (1)
 - [1/4" Ratchet Extension](#) (1)
-

Step 1 — Header Panel

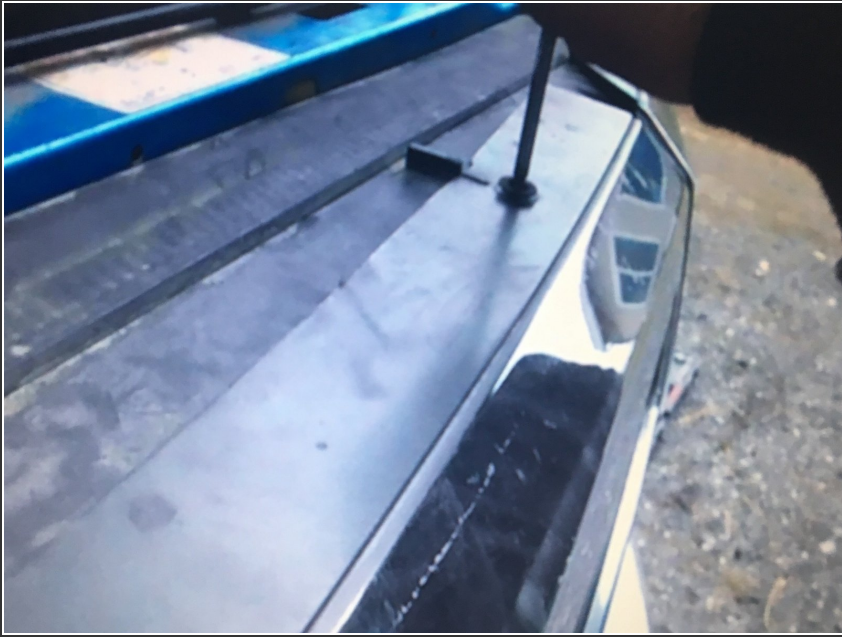

- Remove the 5 screws with the screwdriver to remove the grill.

Step 2




- Set aside the windshield fluid/coolant reservoir by removing the 11mm bolt.

Step 3



- Remove the two screws on top of the headlight bezel, and the two 11mm bolts on the back of the bezel.
- Then, remove the bolts from the housing. Repeat this step for the other headlight.

Step 4

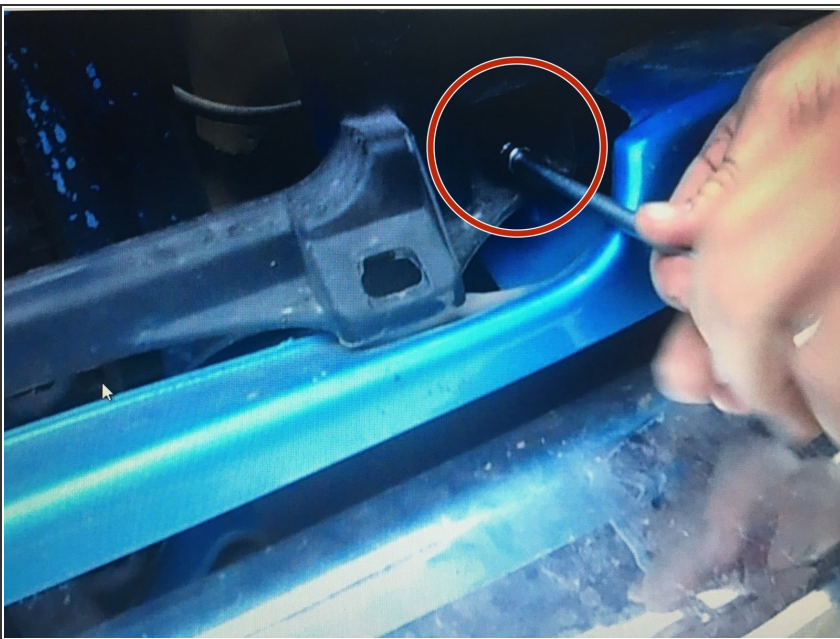


- Remove the bolts retaining the header panel using the 8mm socket and ratchet.

Step 5



- Remove the headlight bulbs from the headlight housing by turning them counterclockwise on the retaining clip.

Step 6

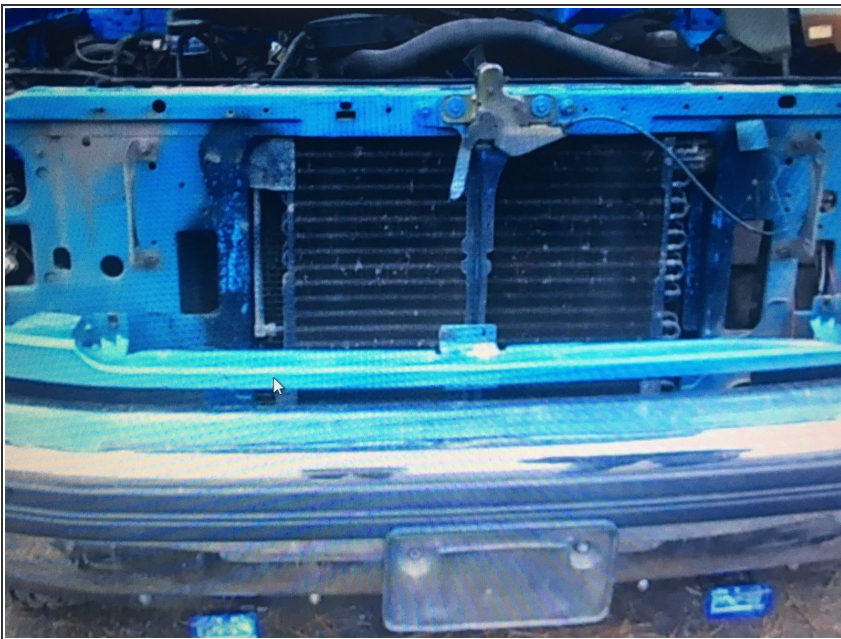

- Remove the old header panel, and install the replacement panel.

Step 7



- Replace all of the bolts that retain the header panel.

Step 8



- Reinstall the headlight bulbs by turning clockwise on the retaining clip.

Step 9



- Reinstall the headlight bezels after reinserting the marker lights with the two screws, and two 11mm bolts.

Step 10



- Reinstall the windshield fluid/cooler reservoir with the 11mm bolt.

Step 11



- Reinstall the grill with the 5 screws.