

Dell Latitude E6520 Keyboard Replacement

How to replace a Dell Latitude E6520 keyboard.

Written By: Alec Weiss



INTRODUCTION

The steps in this guide will require a JIS #0 screw driver to remove 6 screws with a head size of approximately 4.36mm and length of 3.63mm.



TOOLS:

• JIS #0 Screwdriver (1)

Step 1 — Battery





- With the laptop closed and the bottom side facing up, slide the two battery latches towards the sides of the laptop.
- (i) When the latches are unlocked, a small logo resembling an open padlock will become visible.

Step 2





Grasp the battery from the top and pull upward.

Step 3 — Bottom Cover





Remove the ten 8.6 mm JIS #0 screws.

Step 4



 Place fingers underneath cover and pull off the cover.

Step 5 — Keyboard








Pry off the plastic keyboard trim. It is easiest to start at the bottom of the keyboard.


Step 6

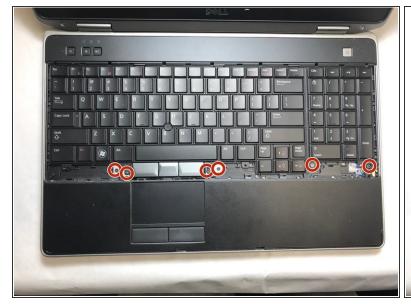



• Remove the six 3.63 mm JIS #0 screws holding the keyboard in place.


Step 7

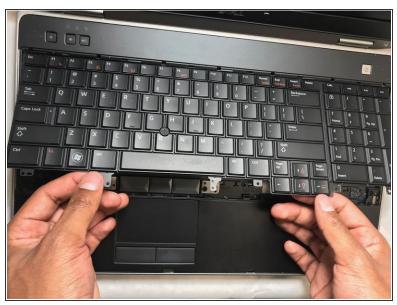




- Lift the keypad up from the bottom.
- Rest the keypad on the LCD screen for easy access during the next step.

Step 8

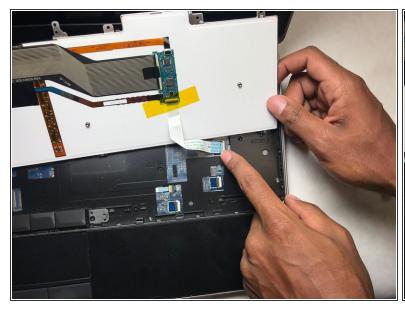

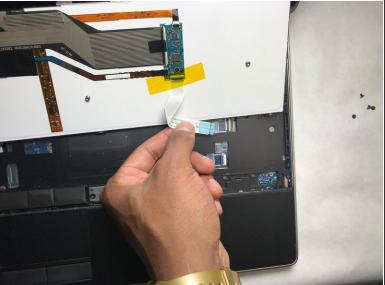

- Peel back the tape holding the ribbon connector.
- Disconnect the ribbon and the keyboard will be free from the laptop.

To reassemble your device, follow these instructions in reverse order.