




# Razer Phone Battery Replacement

This is a guide on how to replace the battery on your Razer Phone.

Written By: Bryan

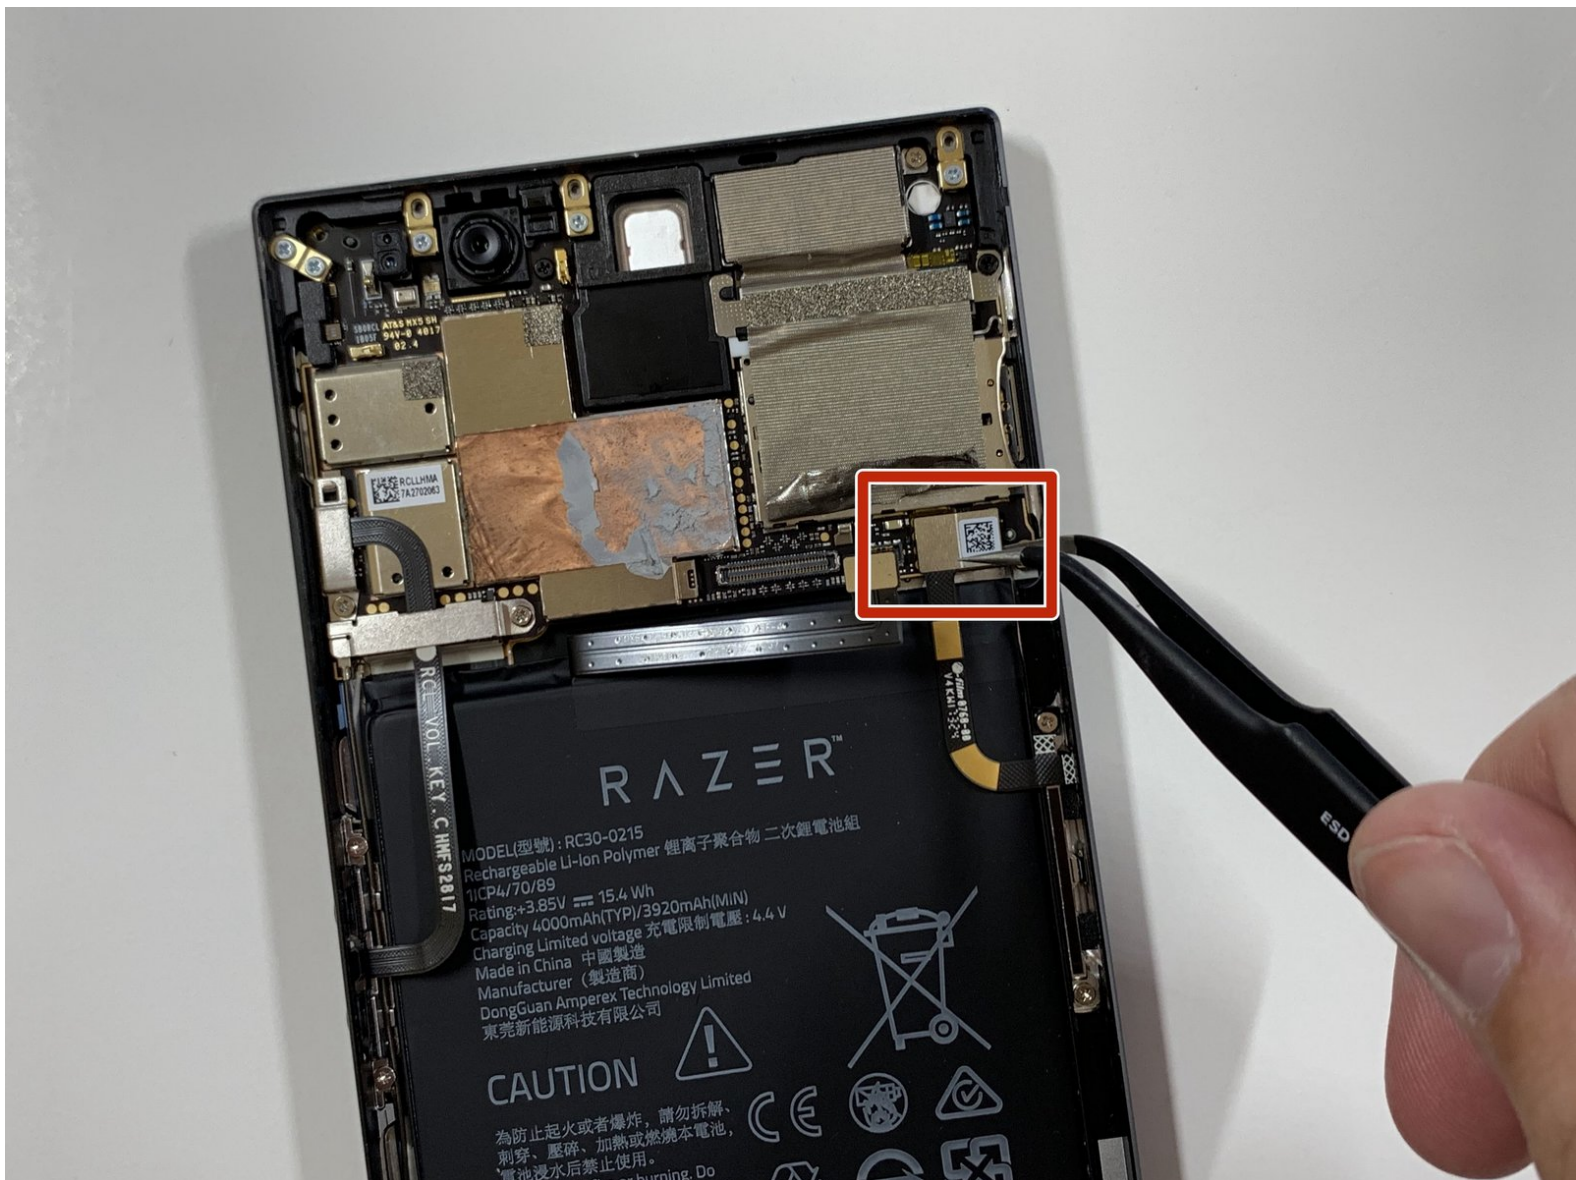

## INTRODUCTION


Is your Razer Phone having problems with the battery and you need to replace it? Follow this easy guide to replacing the battery on your phone. You'll need the #000 Phillips screw driver, the Torx head T5, the tweezers, the metal spudger and the jimmy.

---

### TOOLS:


- [Phillips #000 Screwdriver](#) (1)
  - [Jimmy](#) (1)
  - [Tweezers](#) (1)
  - [T5 Torx Screwdriver](#) (1)
  - [Metal Spudger](#) (1)
-

## Step 1 — Display Assembly

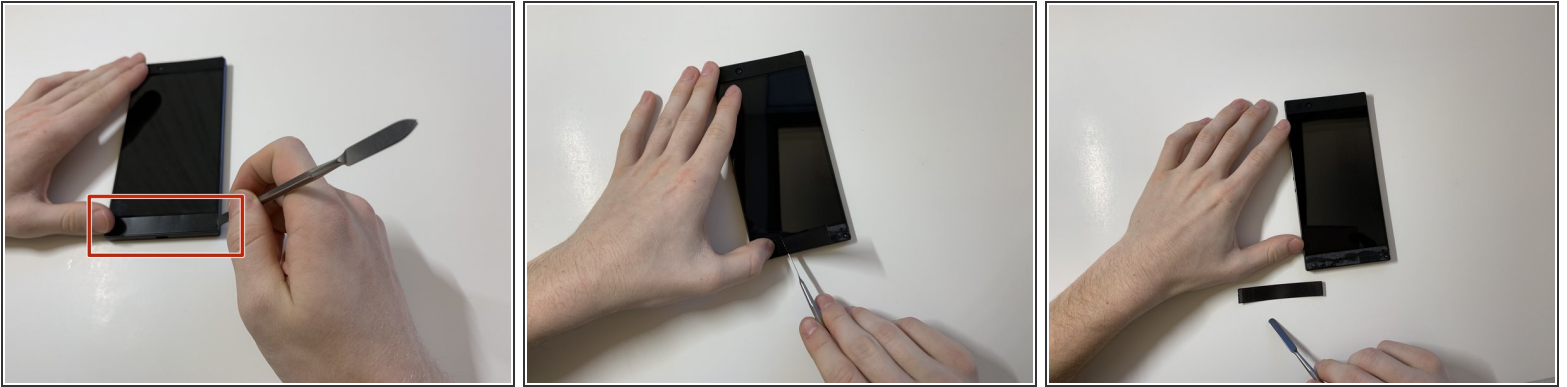


- Remove the plastic speaker grills by using the metal spudger to pry underneath the strips.
- Peel off the plastic speaker grill to reveal the screws.
- ⓘ Heating up the plastic grills make them easier to remove.
- ⚠ Peeling off the plastic speaker grill will ruin the adhesive used to keep it in place. A new adhesive must be used to put the grill back on the device.

## Step 2

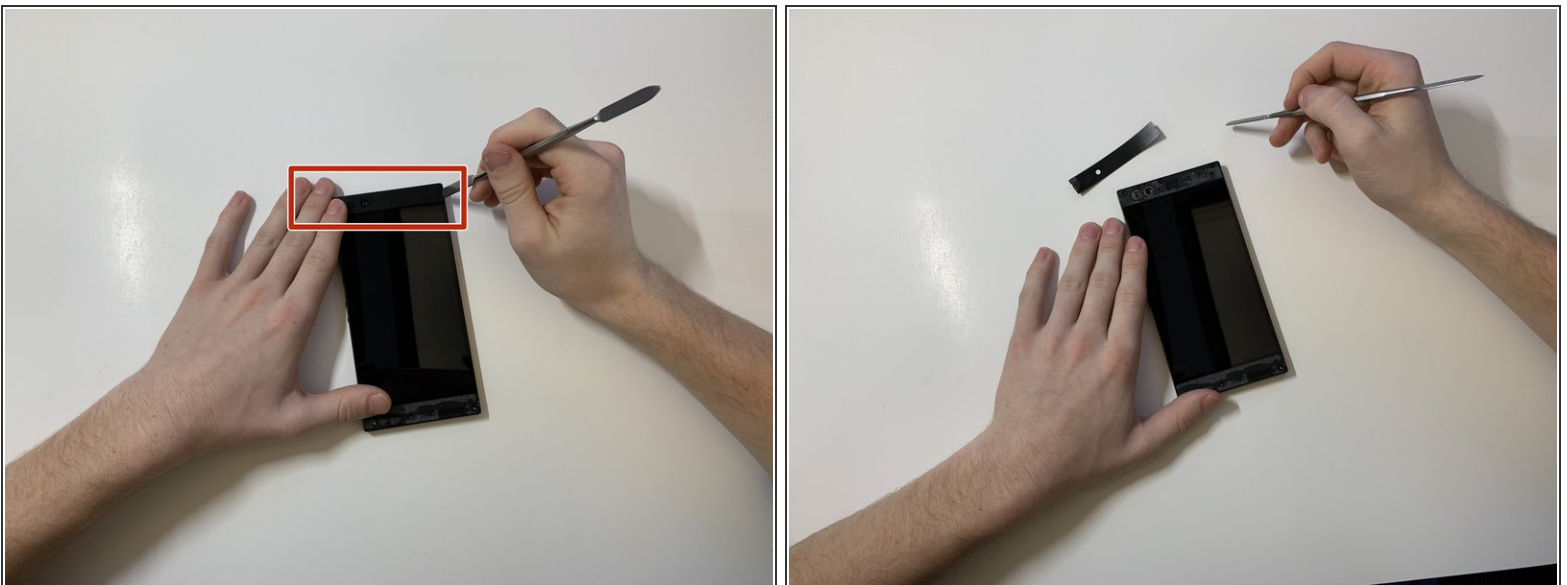


- Pry the top plastic grill off with the metal spudger and reveal the screws.

### Step 3

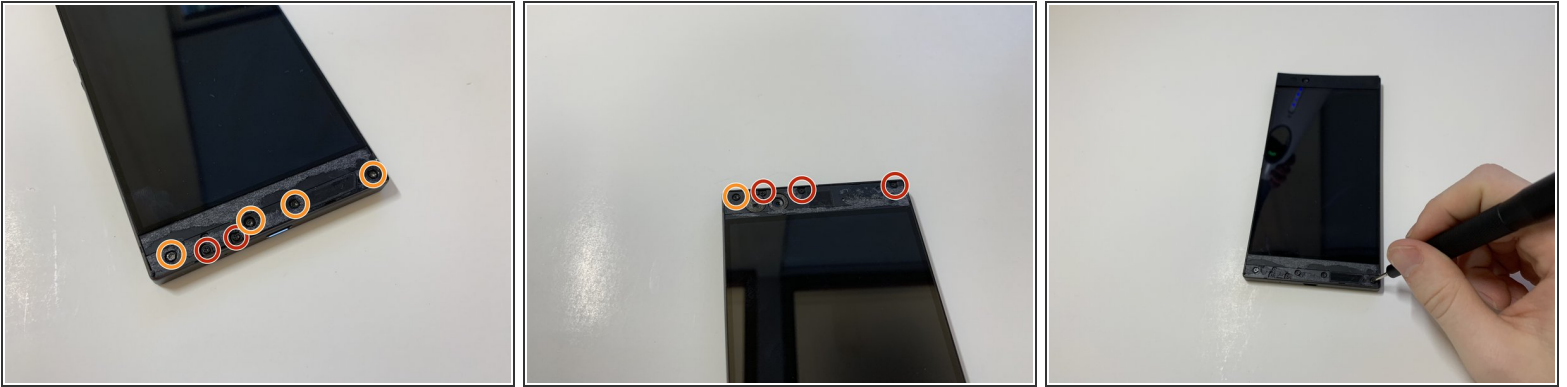

- Remove five (two bottom, three top) 2.5 mm screws with the Phillips #000 screwdriver.
- Remove five (four bottom, one top) 5.5 mm screws with the Torx Head T5 screwdriver.


### Step 4

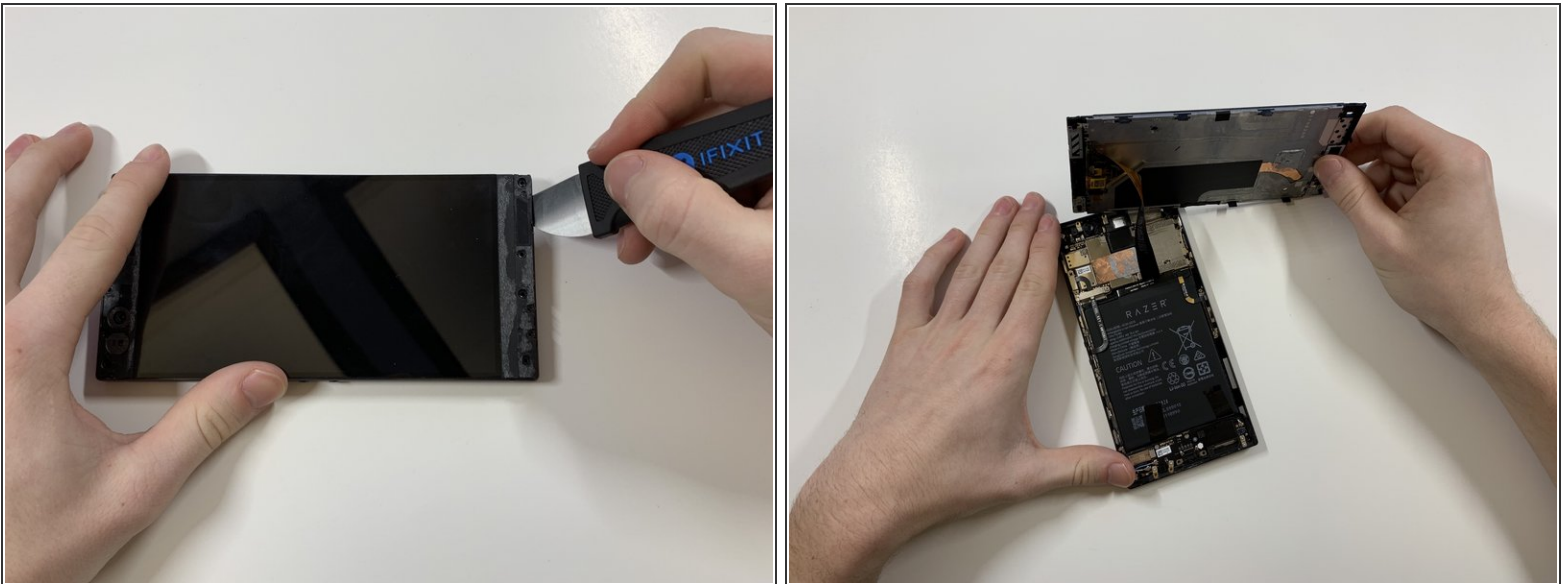

- Remove the display assembly by using the Jimmy to separate the assembly from the phone's frame.
- Lift the display assembly away from the other half of the phone.




## Step 5

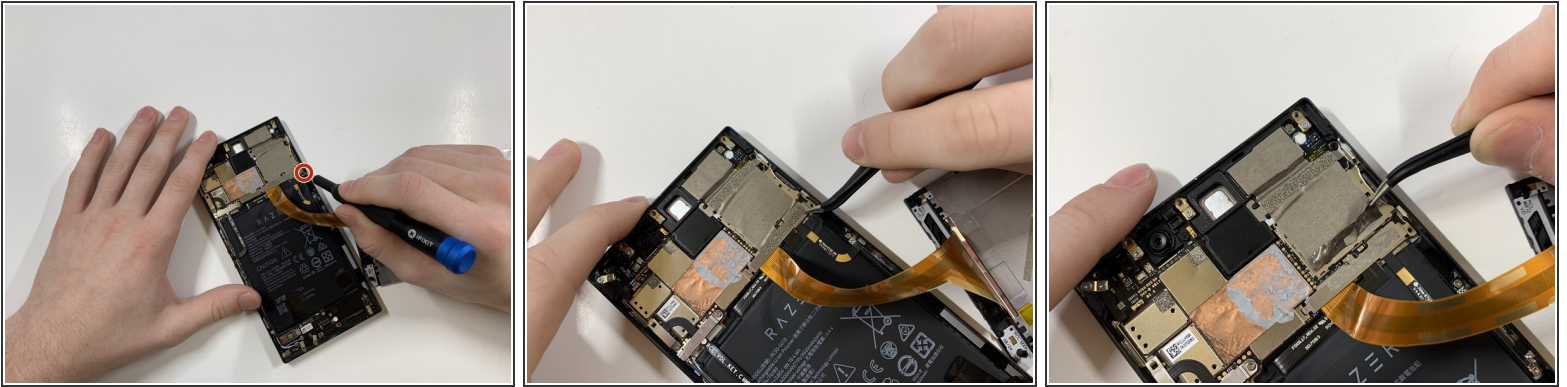

- Remove one 2.5 mm screw holding down the metal bracket connector using the Phillips #000 screwdriver.
- Peel back the metallic shielding over the connector using tweezers.
- Remove the metal bracket connector.

## Step 6

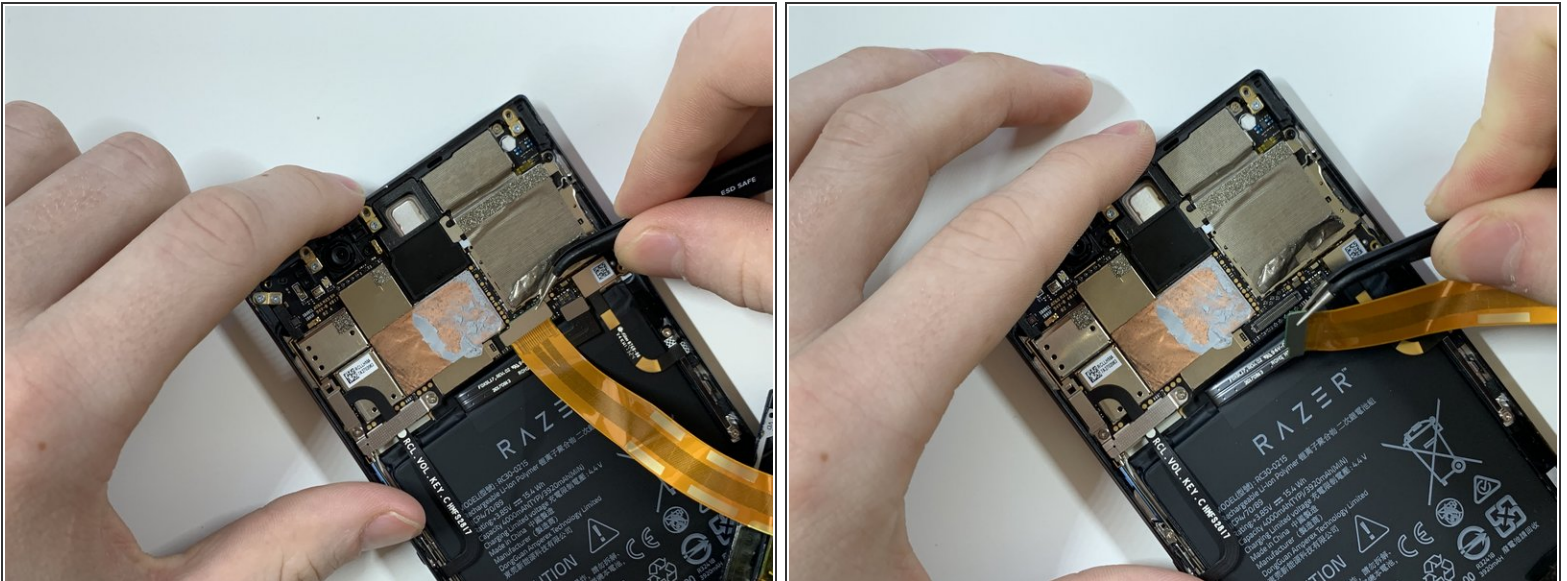

- Grab hold of the the screen ribbon with the tweezers and remove it from the rest of the phone to free the assembly display.

## Step 7 — Battery



- Grab hold of the connector on the right side of the phone (just above the battery) using the tweezers.
- Remove the connector.



## Step 8



- Remove the 2.5 mm screw holding down the bracket with a Phillips #000 screwdriver.
- Grab the bracket with the tweezers and remove it.





## Step 9

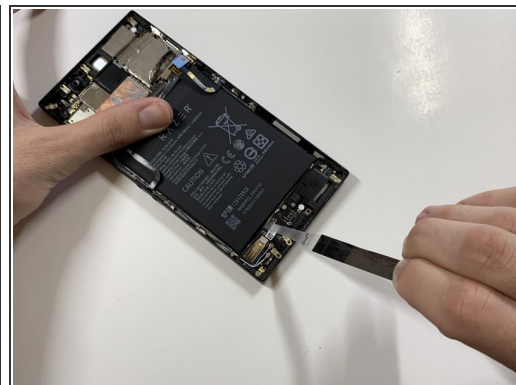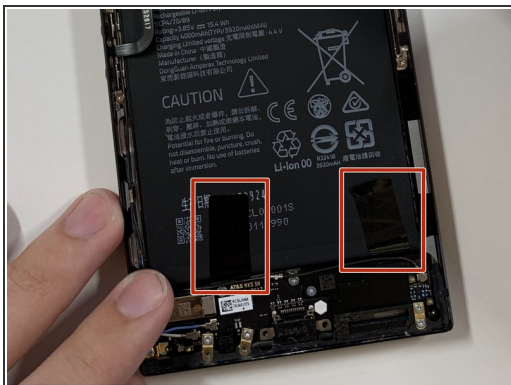

- Peel off and pull out the elastic tabs at the bottom of the battery.

## Step 10

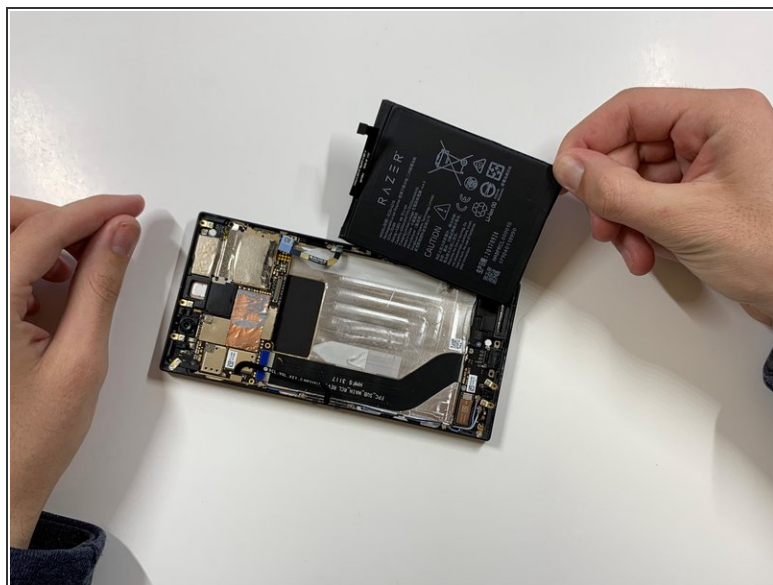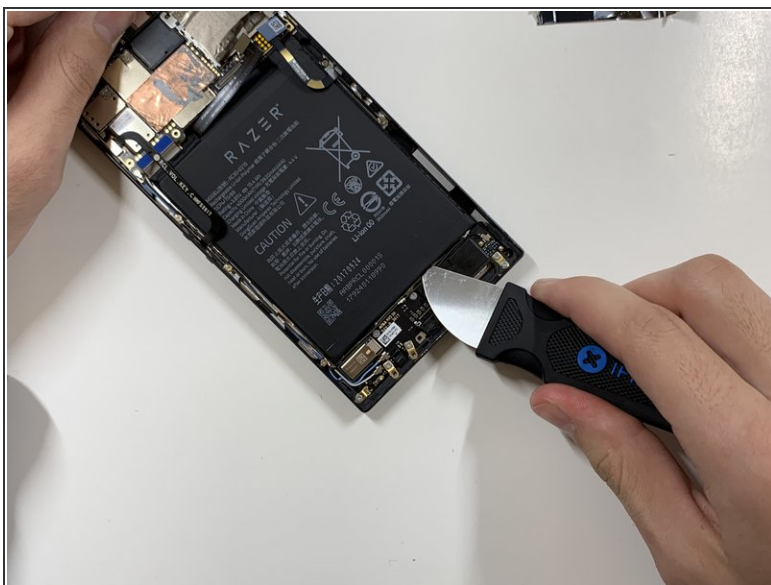

- Carefully use the Jimmy to wedge the battery out of the phone.

To reassemble your device, follow these instructions in reverse order.