



Apple Lisa Lisa DAC Installation

This guide demonstrates how to install the Lisa DAC (Digital Analog Converter) sound card.

Written By: LisaGuide





PARTS:

- [Lisa DAC](#) (1)
-

Step 1 — Remove Lisa's Rear Panel



- Follow the [Apple Lisa Disassembly Guide](#) to remove the Lisa's rear panel.

Step 2 — Installing the Lisa DAC




- Locate Lisa's expansion slots.
- Locate expansion slot 2.
- Pull the metal rod out from slot 2 and rotate 90° clockwise.
- Slide the Lisa DAC into expansion slot 2.
- Rotate the metal rod, as described before, 90° counter-clockwise and push in to secure the Lisa DAC.

Step 3 — Reinstall Rear Panel



- Reinstall the Lisa's rear panel.

Step 4 — Installing Lisa DAC Software

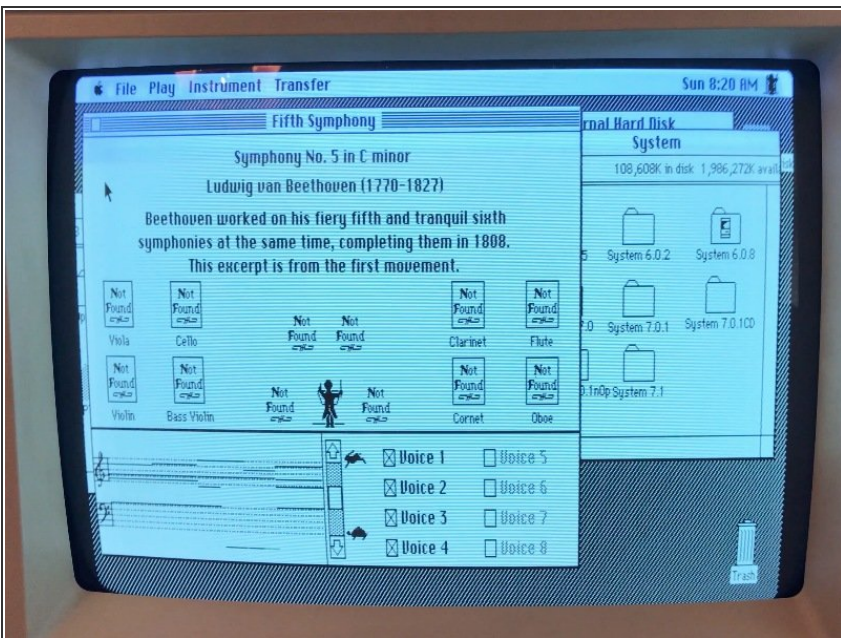

- The Lisa DAC software can be found [here](#).
- Lisa DAC requires [MacWorks Plus II](#).

To reassemble your device, follow these instructions in reverse order.