



# 2009-2014 Ford F-150 Headlight Replacement

How to replace a damaged/broken H13 headlight bulb of a 2009-2014 Ford F-150.

Written By: Alec Gasbarro



## INTRODUCTION

This isn't a very difficult task, but you do need to know what you're doing. You can use a 10 mm socket and socket wrench or the equivalent of such, it doesn't matter much. You can even just use an adjustable wrench, though it'd be easier if you used the socket wrench. It would also help if you had an extender and a Phillips screwdriver. Be sure to wear gloves too, if you aren't careful you can shock yourself.



### TOOLS:

- [10mm Socket](#) (1)
- [Socket Wrench](#) (1)
- [Adjustable Wrench](#) (1)



### PARTS:

- [Sylvania H13/9008 Halogen Headlight Bulb](#) (1)

## Step 1 — Headlight



- Pop the hood open.



## Step 2



- To pop the hood, undo the latch locking it.




## Step 3

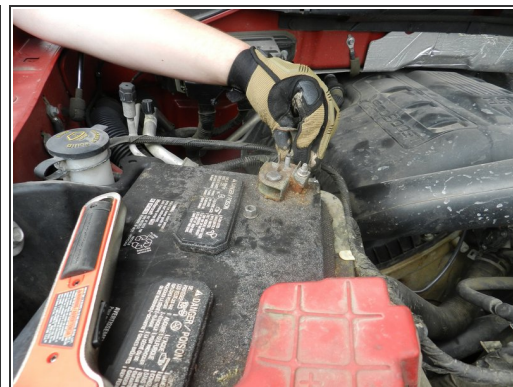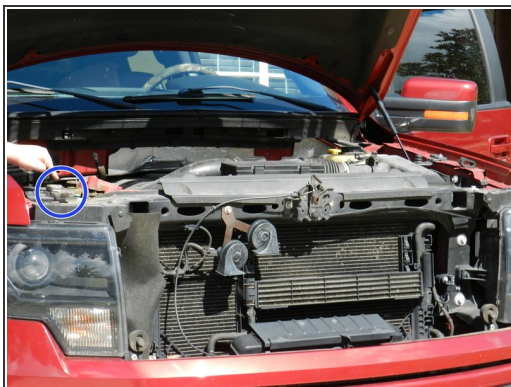

- Use an adjustable wrench to disconnect the negative power from the battery (Turn counterclockwise then lift).

## Step 4

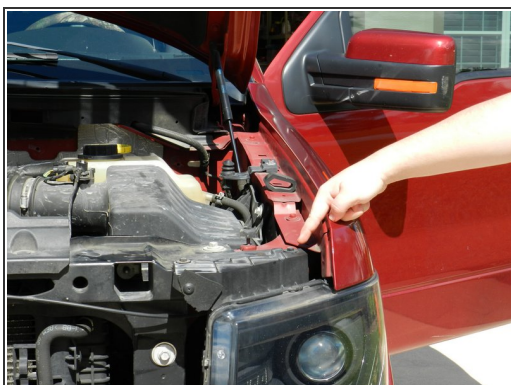

- Note each socket placement.

## Step 5



- Note what each socket looks like (They are 10 mm large.)

## Step 6



- Use the socket wrench with the 10 mm socket to unscrew each socket (Turn counterclockwise).



## Step 7



- Pull out the headlight housing. Don't be afraid to use some force.

## Step 8



- Note the headlight bulb location.

## Step 9



- Remove the headlight bulb (Turn counterclockwise then lift).

After everything in this guide is done, all you need to do is take off the previous headlight bulb and put the new one in. Then, be sure to reassemble everything by following these instructions in reverse order. If for some reason this does not solve your issue, be sure to make sure everything is reconnected, including both the battery and headlight bulb. Otherwise, you may be trying to fix something that is not the issue, or only part of said issue.