




# Samsung BlackJack II Back Casing Replacement

Use this guide to replace the back casing and...

Written By: Ryan Rumsey

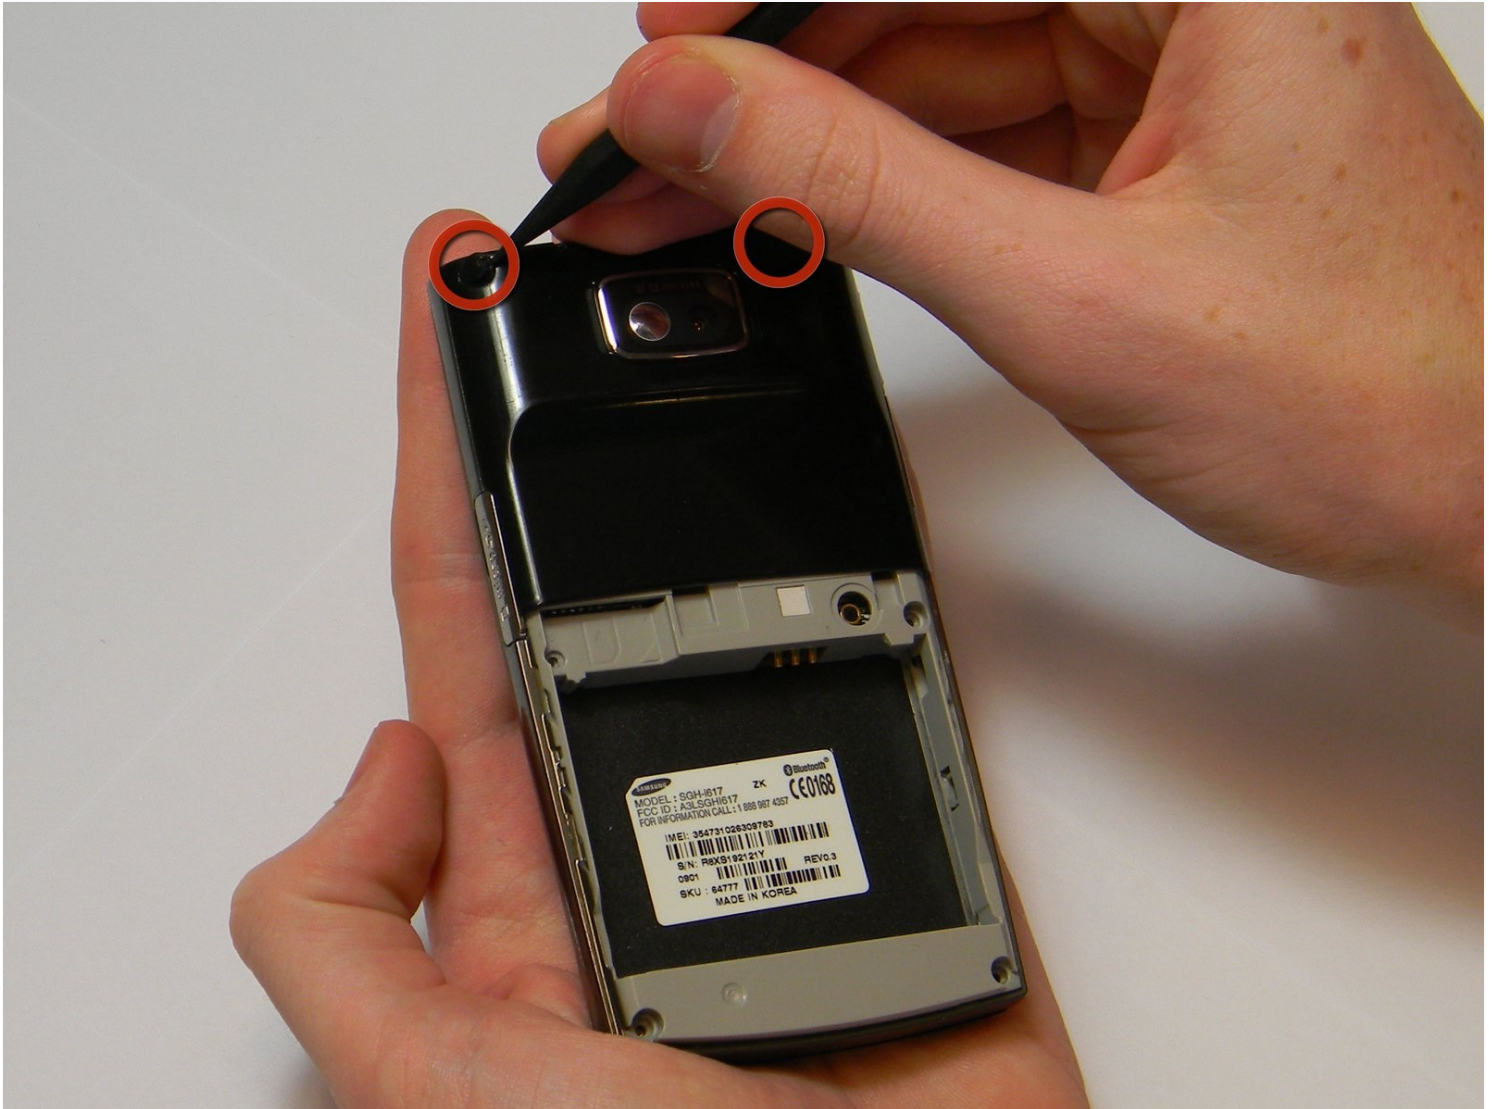

# INTRODUCTION

Use this guide to replace the back casing and to remove the back casing to access the interior of the phone.



## TOOLS:

[Phillips #00 Screwdriver](#) (1)

[iFixit Opening Tool](#) (1)



[Spudger](#) (1)

## Step 1 — Battery

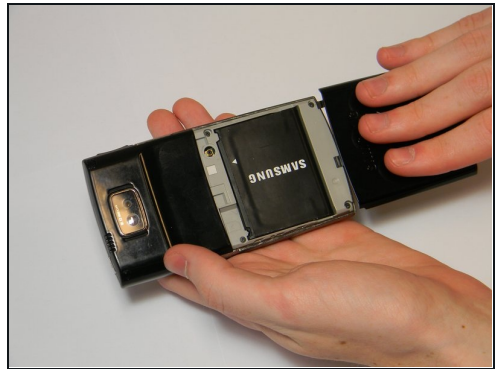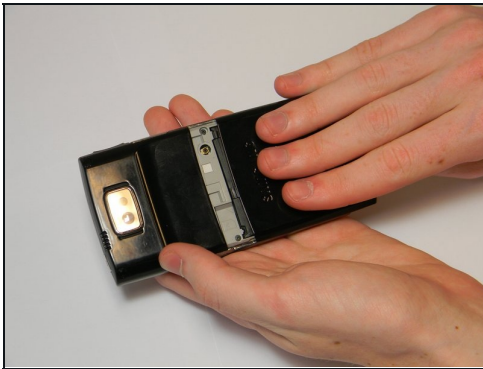

- Apply downward pressure to the top of the battery panel while pulling down to slide it off the phone.

## Step 2

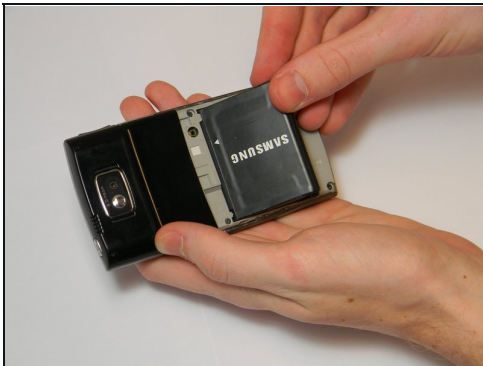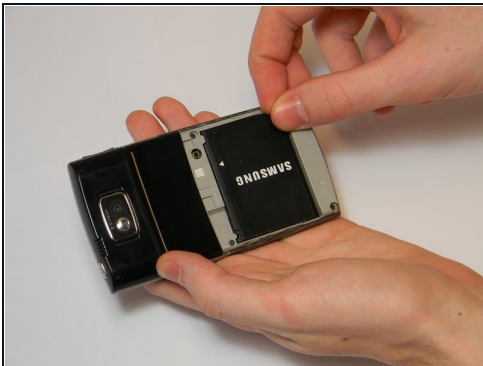

- Locate the grooves on the sides of the battery near the bottom of the phone. Use your fingers to pull the battery up and out of the phone.




### Step 3 — Back Casing





- Use the spudger to pry the two plastic caps out of the top corners of the phone casing.
- ① To get a better grip, you may use the [tweezers](#) to finish pulling the plastic caps from the phone.

### Step 4

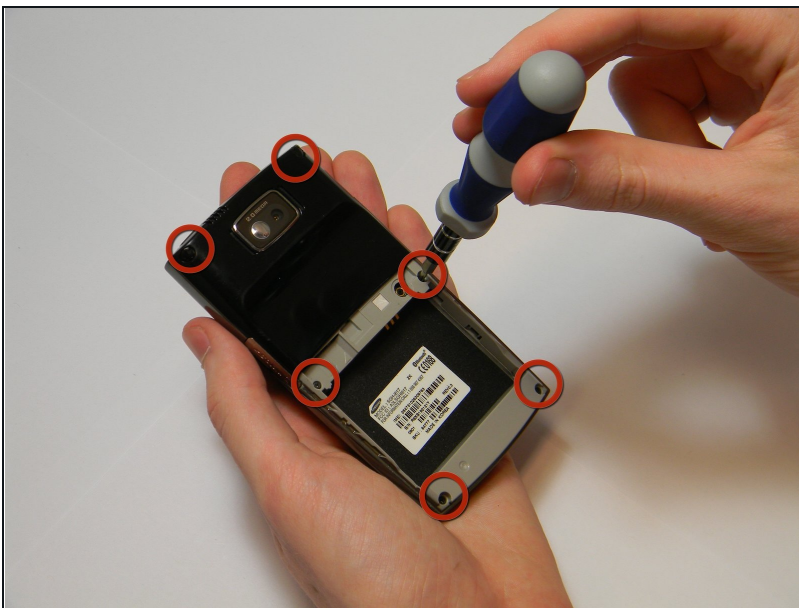

- Remove the six 4.0 mm screws using the Phillips 00 screwdriver.

## Step 5

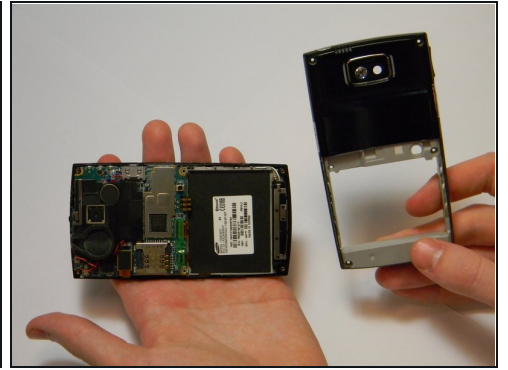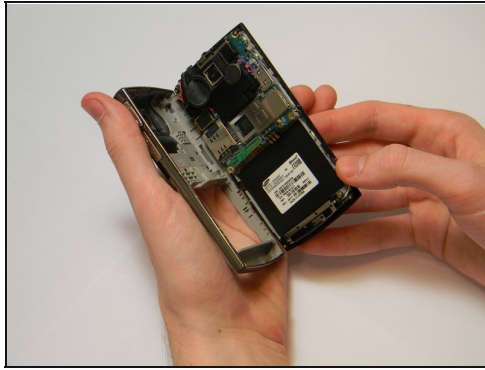

- Insert the plastic opening tool in the gap between the back panel and rest of the body.
- Slide the tool along the edges until the two pieces come apart.
- ① The circuit board is attached to the front casing. Both casings should separate without having to sever electrical connections.

---

To reassemble your device, follow these instructions in reverse order.