



Razer Blade RZ09-0130 2015 Display Replacement

If the display on your Razer Blade RZ09-0130...

Written By: Ben Haering



INTRODUCTION

If the display on your Razer Blade RZ09-0130 2015 laptop is physically damaged, this guide will demonstrate how you can properly replace the display. It should be noted the display is both the screen and casing behind the screen. If the casing is damaged, this replacement will also ensure a new screen. Be sure there is noticeable disfiguration on the screen (cracks, scratches, etc.) before applying this procedure, otherwise the display malfunction can be traced back to a software related problem.

TOOLS:

- [T5 Torx Screwdriver](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Back Panel



⚠ Be sure to power off the device before beginning.


- Use a Torx T5 screwdriver to remove the ten 3 mm screws along the edge of the back panel.

Step 2



- Remove the back panel from the laptop by sliding it away from the hinge.
- ⓘ This device is missing the battery. Make sure to detach the battery connector before proceeding with laptop repairs.

Step 3 — Display

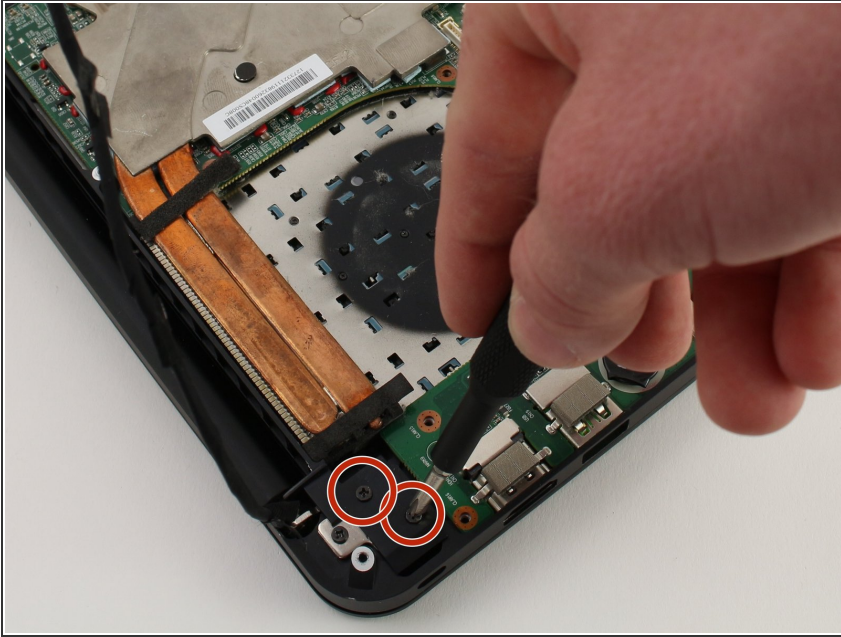

- Remove the two 5mm Phillips #00 screws.

Step 4




- Remove the plastic panel.

Step 5



- Remove one 3mm Phillips #00 screw from the metal plate.

Step 6

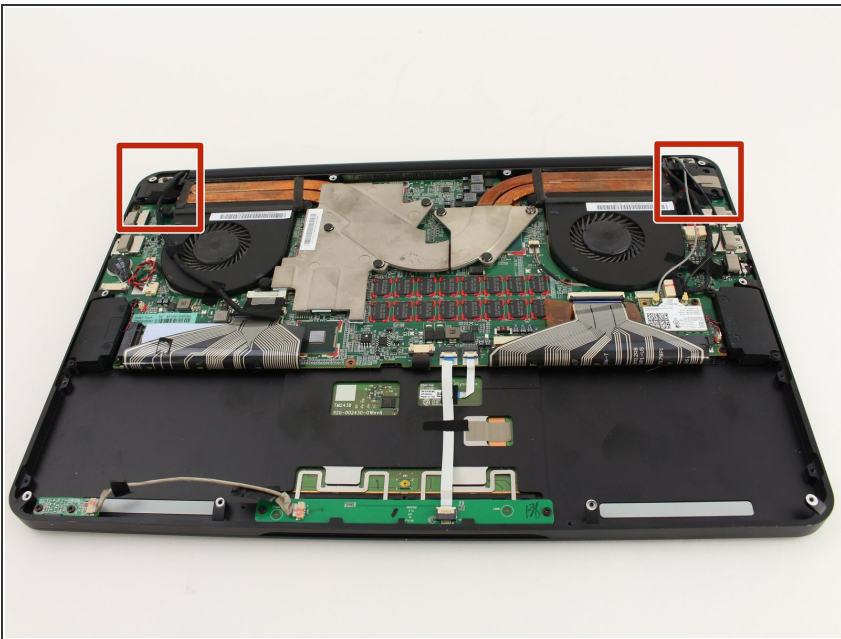

- Repeat the previous three steps on the opposing side.

Step 7



- Gently open the device with your hands and separate the display from the keyboard.
- ⓘ The device will make a popping or cracking sound when the two pieces separate. This is normal.

To reassemble your device, follow these instructions in reverse order.