




8BitDo SN30 Pro+ Controller Analog Sticks Replacement

This guide is used for the replacement of the Analog Sticks on your 8BitDo SN30 Pro+ controller.

Written By: Brian W

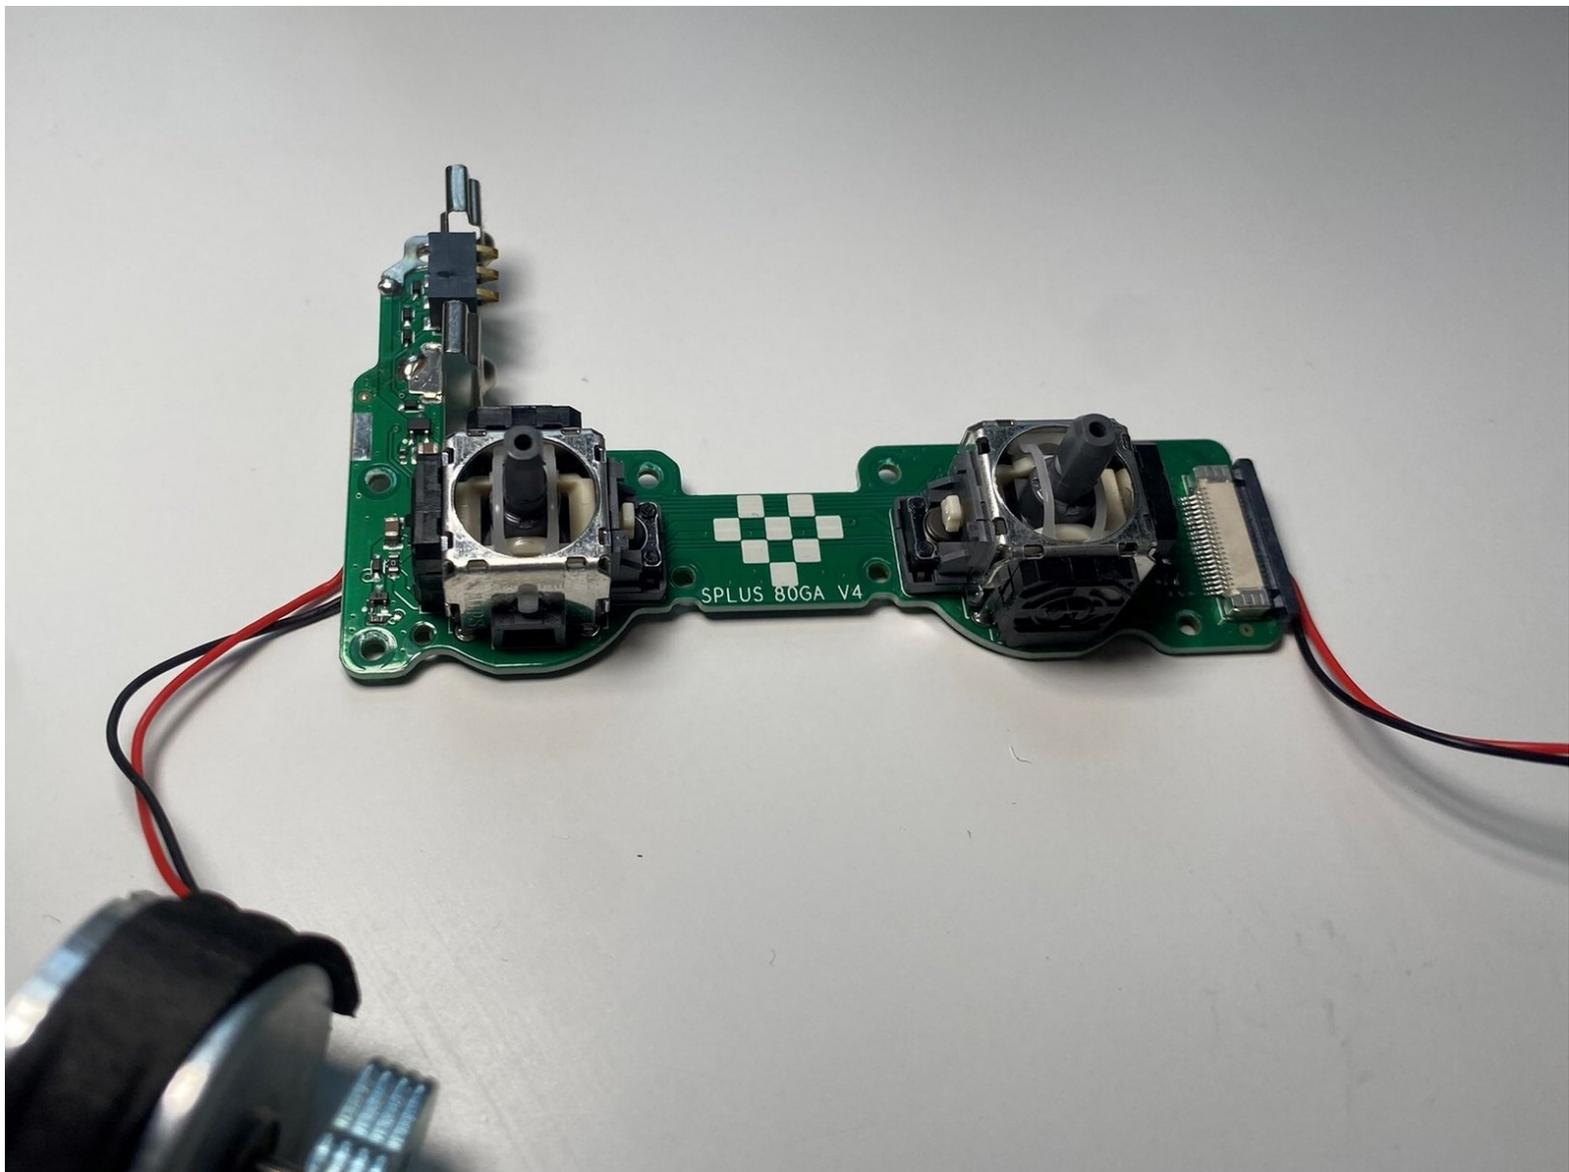

INTRODUCTION

This guide is used for the replacement of the Analog Sticks on your 8BitDo SN30 Pro+ controller.

This guide requires desoldering and soldering the motor wires.

TOOLS:

- [T6 Torx Screwdriver](#) (1)
 - [Tweezers](#) (1)
 - [Phillips #1 Screwdriver](#) (1)
 - [Soldering Workstation](#) (1)
-

Step 1 — Remove Battery



- Place the controller face down.
- Remove the battery cover.
- Remove rechargeable battery or AA batteries.

Step 2 — Remove Trigger Buttons



- Remove L2 and R2 trigger buttons by pushing them away from the grips.

Step 3 — Remove Screws




- Use Tweezers to uncover two screws under the label in the battery compartment.
- Use a T6 screwdriver to remove the four 7.3 mm screws securing the rear cover.

Step 4 — Unclip Covers



- At the end of each grip, pry apart the covers.
- Use fingernail or opening pick to undo the two top clips.
 - One clip next to L button.
 - One clip next to R button
- Undo the final clip between the joysticks.

Step 5 — Separate Covers

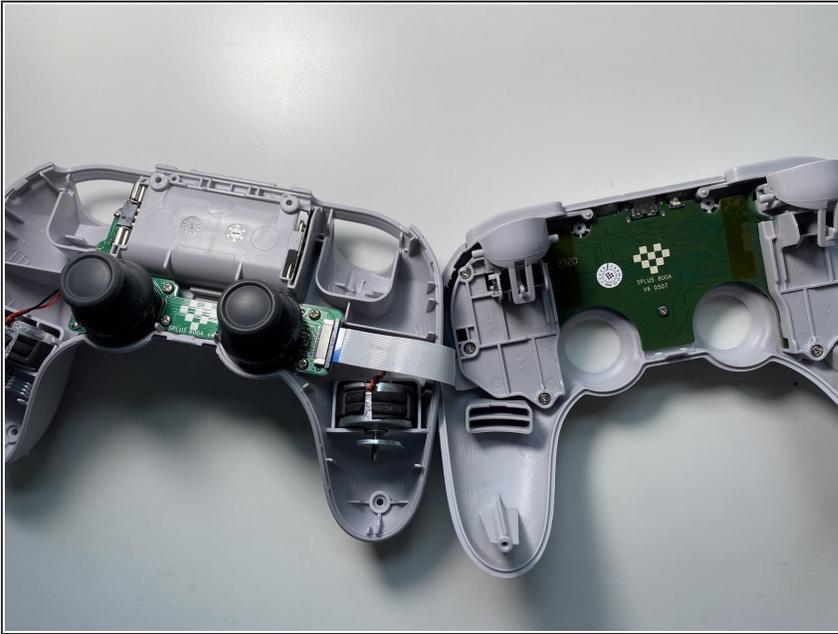

- Carefully move the rear cover away and from the front cover. Place it to the left.


⚠ Do not completely separate. The two halves are still attached via a white ribbon cable.

Step 6 — Remove Ribbon Cable



- Unlock the ribbon cable by push open the black plastic tab.
 - ⓘ The tab will slide about 1.5mm
- Pull the ribbon cable out of the connector in the direction of the cable.

Step 7 — Remove Caps

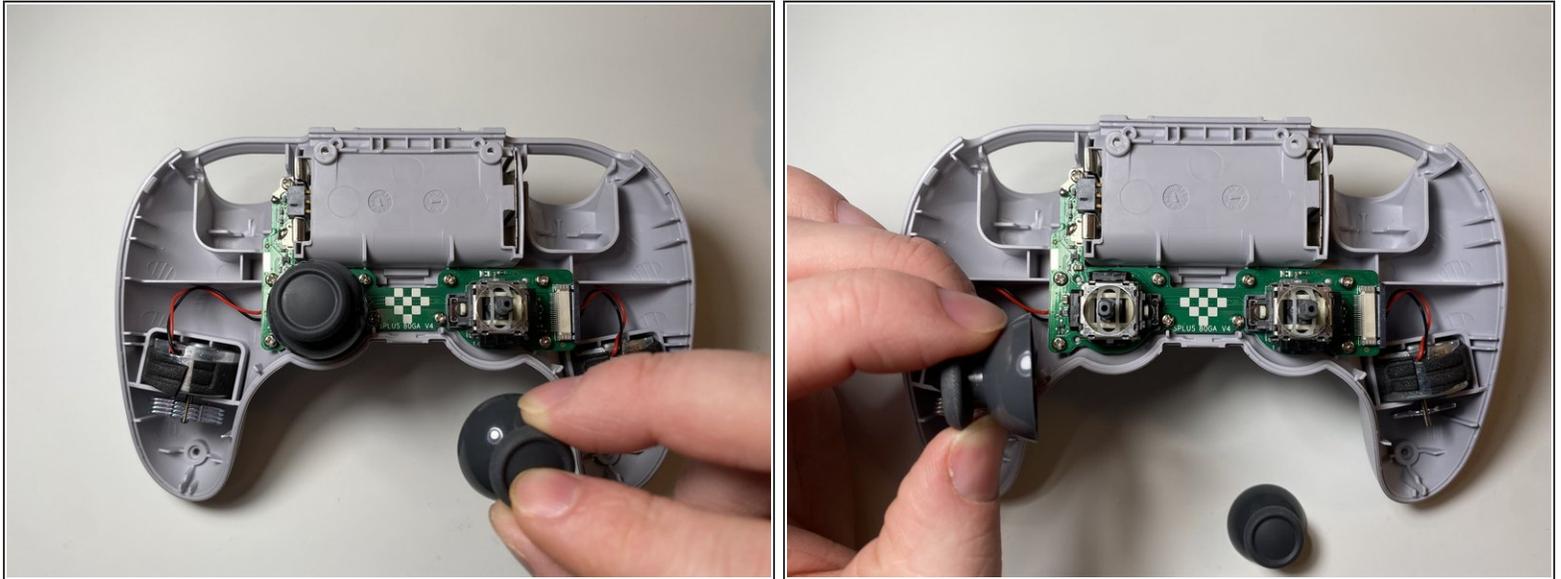


- Grab the top and pull straight up on the joystick cap. Pulling out the caps one-by-one.

Step 8 — Remove Screws




- Use a Phillips screwdriver to remove the nine 5.2 mm screws securing the rear circuit board.
 - Four around the Right stick
 - Four around the Left stick
 - One next to the Battery connector

Step 9 — Separate Rear Board

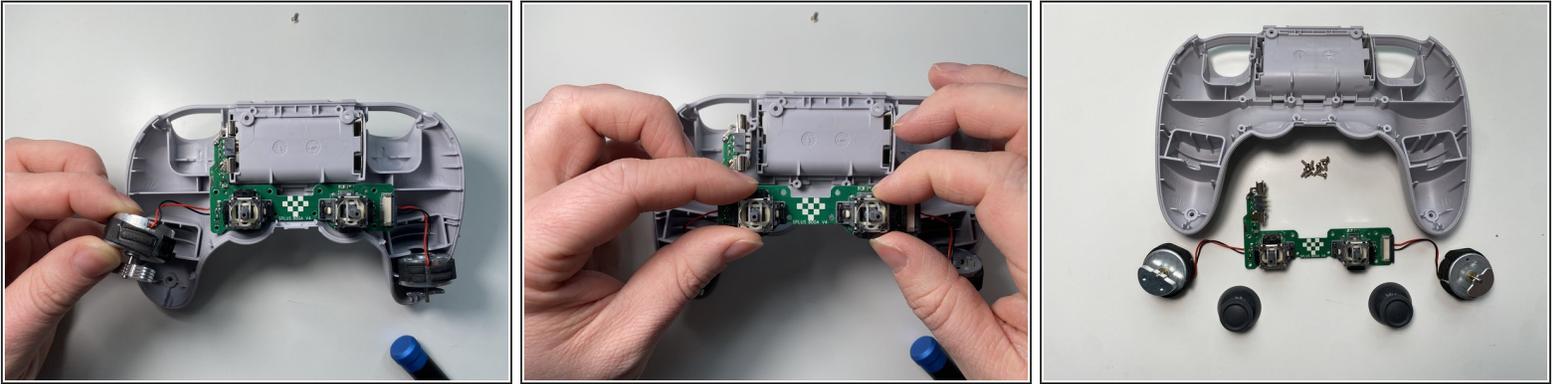

- Pull the two rumble motors out of their housings.
- Grab the analog sticks to pull out the circuit board

Step 10 — Desolder Analog Sticks

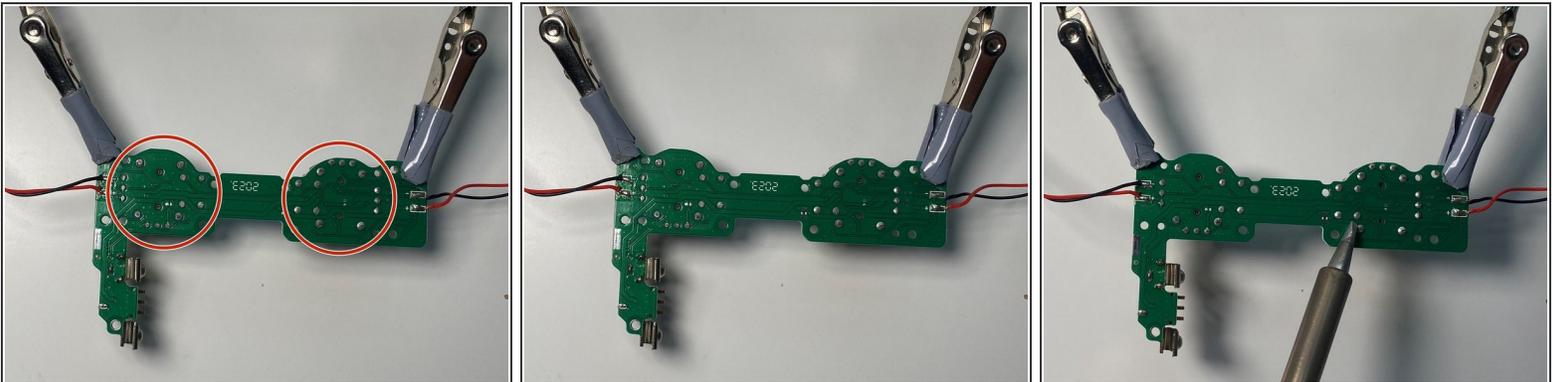

- Flip over the rear board.
 - Using a soldering iron to desolder all the joints of the analog sticks.
 - Make sure all the solder holes are open on the circuit board.
- i** Refer to the following solder guide if necessary: [How To Solder and Desolder Connections](#)

To reassemble your device, follow these instructions in reverse order.