



Motorola V710 Keyboard Replacement

Written By: Karl Sanders



INTRODUCTION

This guide will help show you how to replace the keypad.

TOOLS:

- [Fingers](#) (1)
 - [Spudger](#) (1)
 - [T6 Torx Screwdriver](#) (1)
-

Step 1 — Battery



- Press down on the back button while pulling away from the body of the phone to release the back cover.

Step 2



- Remove the battery from the phone by gently pulling upward on the battery with your fingers.

Step 3 — Keypad




- Unscrew the antenna with a clockwise motion and pull to remove the antenna.

Step 4





- Remove the screws under the antenna and to the right side of the phone with the T6 Torx screwdriver.

Step 5

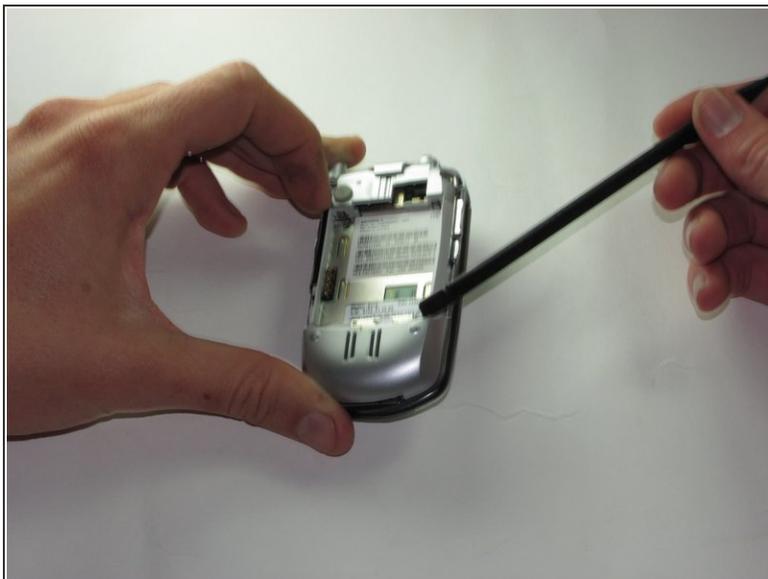


- Use the spudger to remove the bottom plate.

Step 6

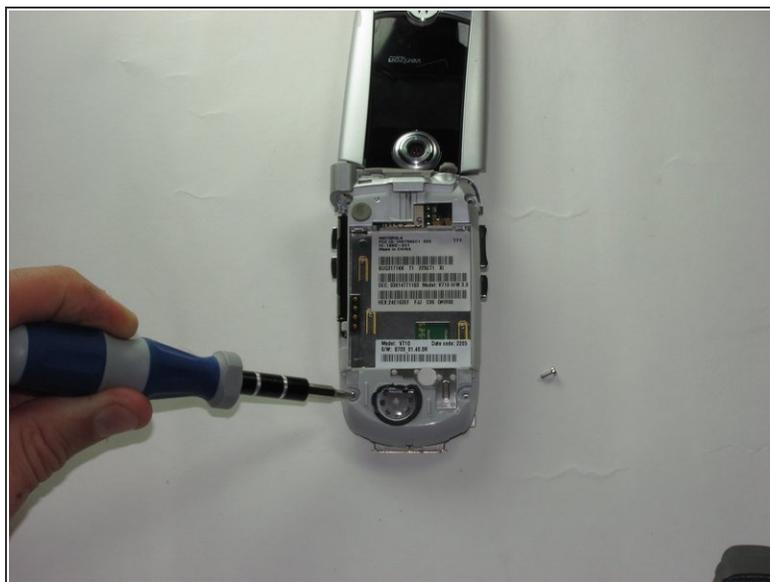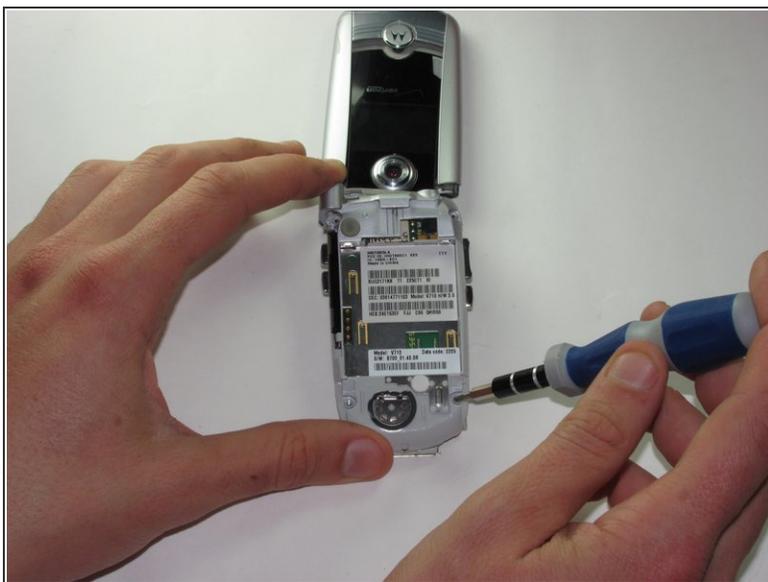

- Unscrew the bottom two screws with the T6 screwdriver.

Step 7

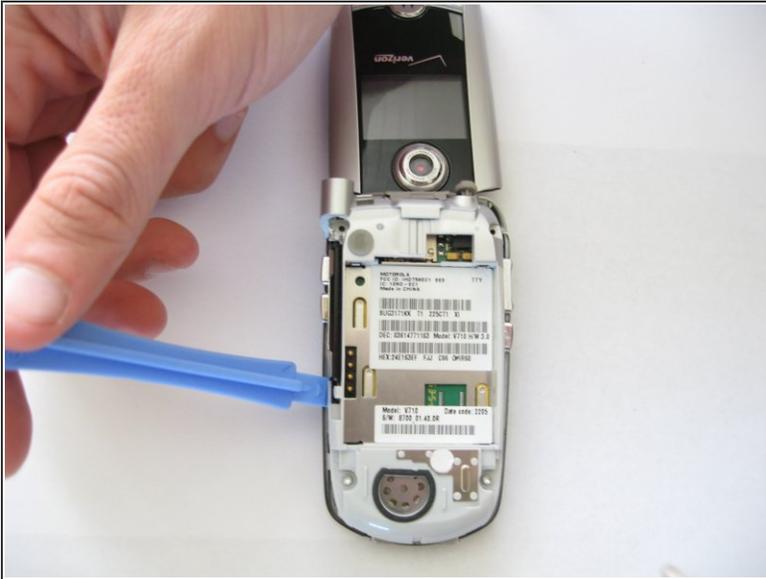

- Use the spudger to remove the keyboard plate.

Step 8



- Use your fingers to push out the keyboard.