

Timbuk2 Suitcase Roller Handle Replacement

How to replace a broken roller handle on a Timbuk2 Suitcase.

Written By: Emilee





- 4mm Allen Wrench (1)
- Screwdriver (1)



• Roller Handle set (1)

Contact warranty@timbuk2.com for this part.

Step 1 — Roller Handle




- Here are the tools you will need:
 - New roller handle set
 - Screwdriver
 - 4mm Allen wrench

Step 2




 Open luggage and unzip backing, exposing back of roller. Using an Allen wrench, unscrew all 10 screws along the bottom plate and remove plastic coverings

Step 3

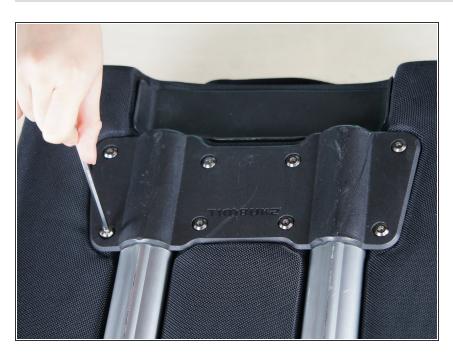

 Turn luggage over and using Allen wrench, unscrew all 8 bolts on the back of luggage handle assembly.
Remove handle frame from luggage body

Step 4



- Put the new roller handle set in place. Repeat steps 2 and 3 in the opposite order.
- You're finished!