




Nokia 6030 Front Cover Replacement

Replacing the glass/front cover of the phone.

Written By: Spencer Woodworth

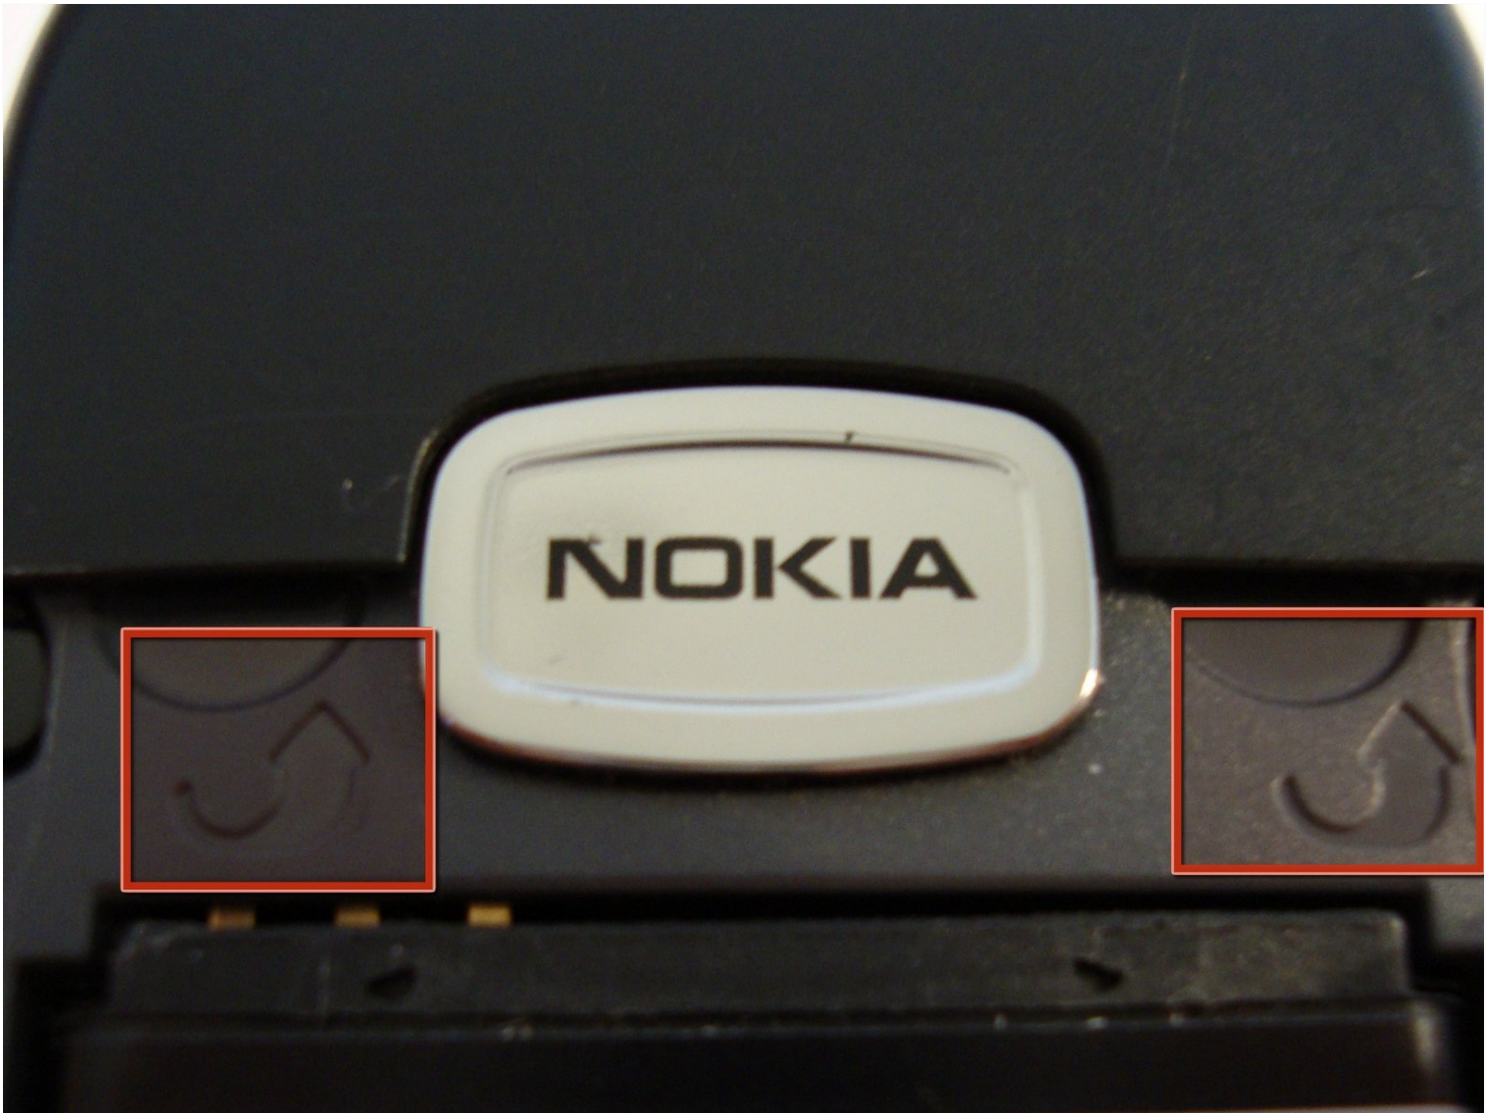

INTRODUCTION


Replacing the glass/front cover of the phone.

Step 1 — Battery




- Press down on the grip on the back of the phone and slide the rear housing down towards the bottom of the phone.

Step 2

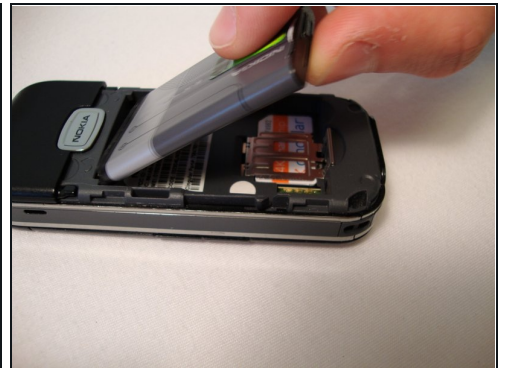

- Use your finger to gently pull the bottom of the battery up by using the slip found at the bottom of the phone.
- Lift out battery and remove.

Step 3 — SIM Card

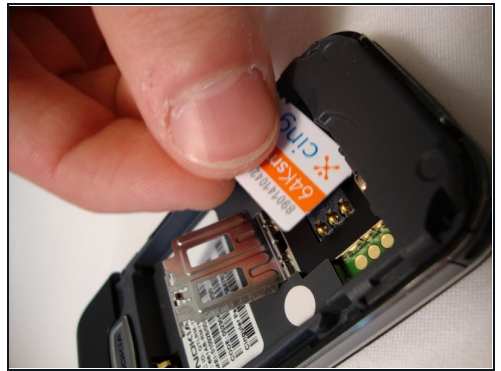


- Use your finger to lift the metal cage up.
- Remove SIM card.

Step 4



- Use your finger to close the metal cage.

Step 5 — Front Cover

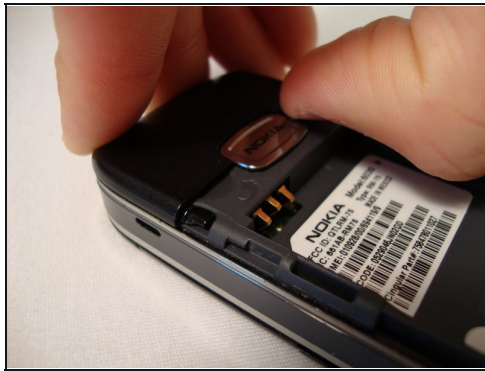


- Insert your two fingers under the two tabs found at the top of the phone underneath the black casing, then pull the casing up and slide it out slowly.

Step 6



- After removing the top cover, turn the phone over so the screen is facing upwards.

Step 7

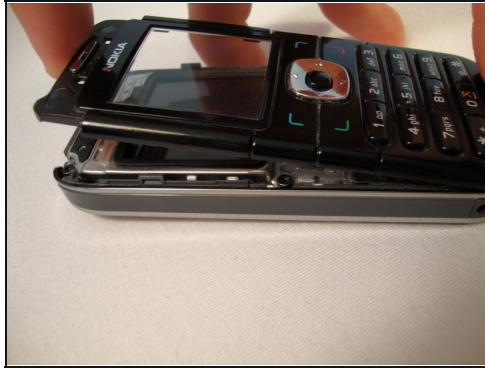

- Use your fingers to slowly lift the screen back towards the bottom of the phone using the arrows found at the top of the phone.

To reassemble your device, follow these instructions in reverse order.