



# LG VX4500 Rear Cover Replacement

This guide shows how to remove the rear case of...

Written By: Matthew Hagan



# INTRODUCTION

This guide shows how to remove the rear case of your LG VX4500 to access the internals of your phone.

## TOOLS:

[Phillips #00 Screwdriver](#) (1)

[Spudger](#) (1)

[Tweezers](#) (1)

[iFixit Opening Tool](#) (1)

## Step 1 — Battery



- Turn the closed phone so that the back panel is facing you.
- Press down and forward firmly on the gray tab in the middle of the phone.

## Step 2



- Now just lift up on the battery and remove it from the phone.


## Step 3 — Rear Cover



- Remove the rubber grommet using a Spudger.




## Step 4

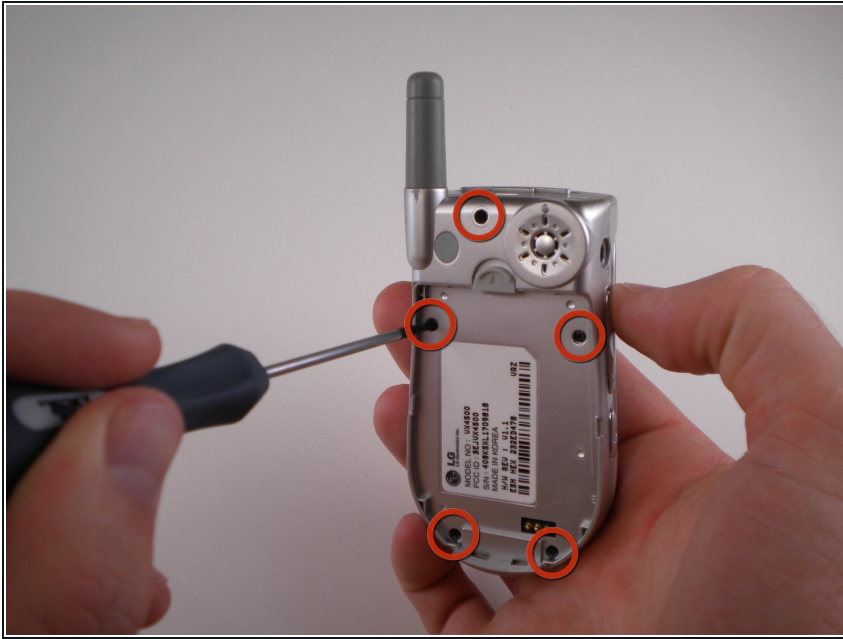

⚠ Be sure not to lose the screws. They are small!

- Remove the five screws using a Phillips #00 Screwdriver.


## Step 5

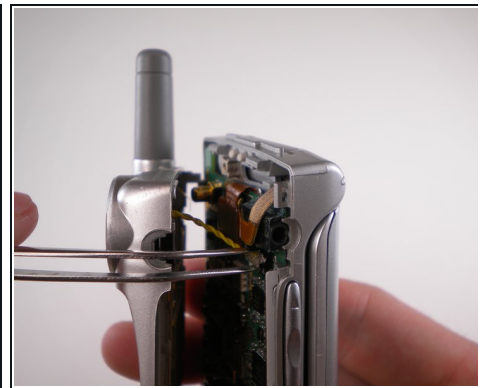

⚠ When removing back cover, be careful not to break the speaker wires.

- Using an Opening Tool, carefully pry off the back cover.
- Using tweezers, gently pull the speaker wires out.

## Step 6

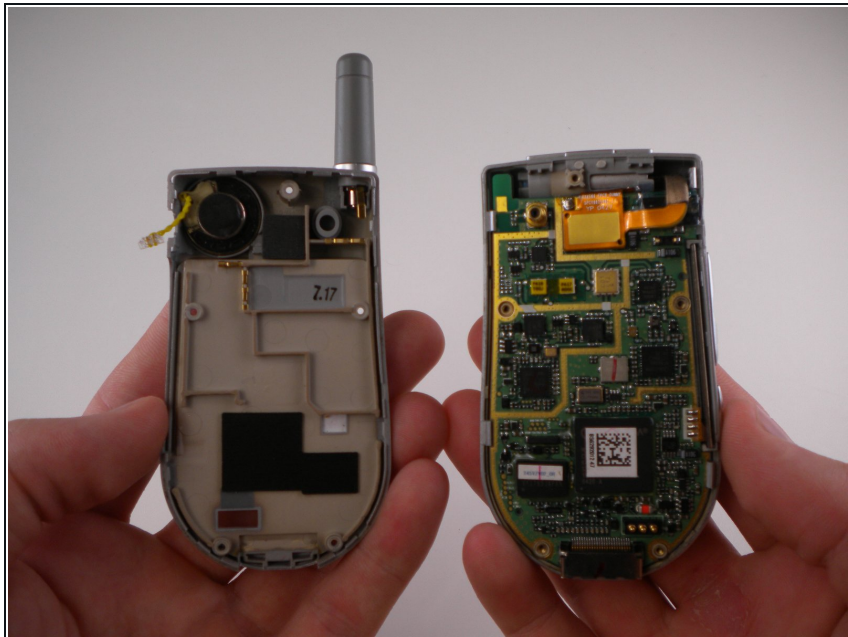

- Separate the two halves.

To reassemble your device, follow these instructions in reverse order.