




Nabi Jr Speakers Replacement

Removing the speakers of the Nabi Jr for replacement.

Written By: Tobias Young

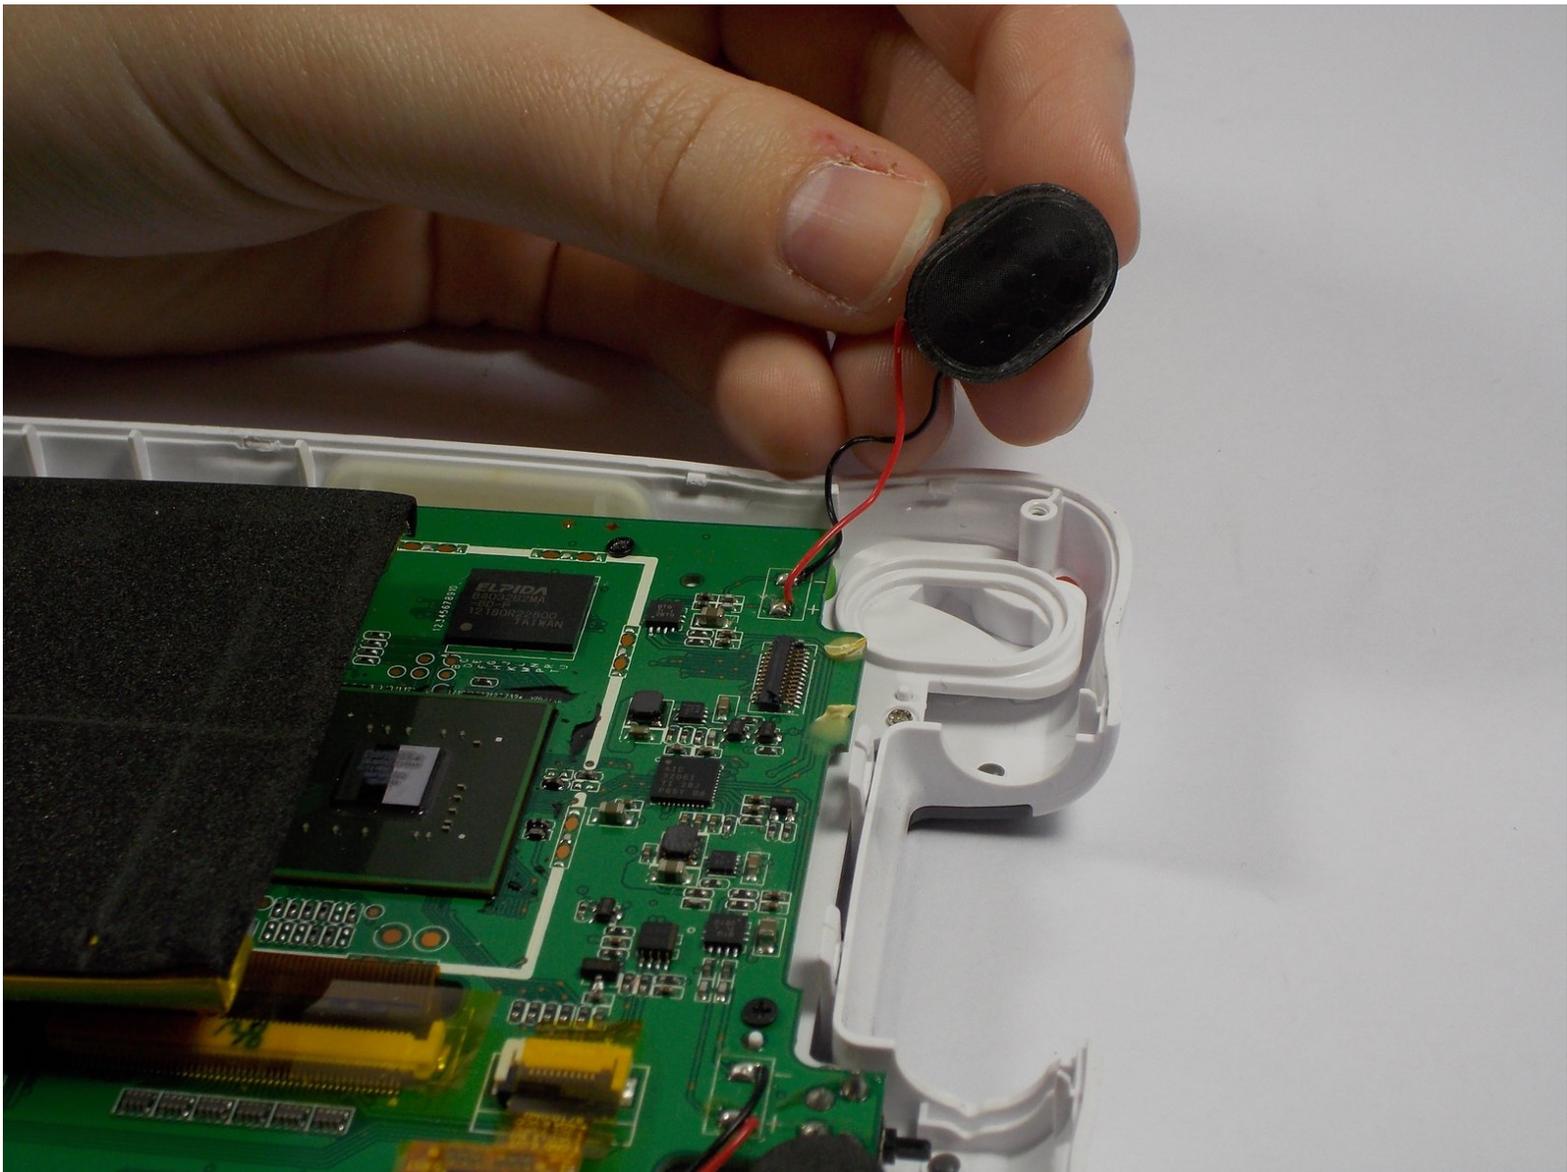

 **TOOLS:**

- [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Soldering Iron](#) (1)
-

Step 1 — Rear Case



- Remove the red rubber case from the device. This should come off with ease.

Step 2




- Turn the device so the screen is facing away from you.
- Using a philips head, size #00, screwdriver, remove the screws in each corner of the plastic casing. (total of 4 screws)

Step 3




- Remove the device casing using a small plastic pry bar.
- ⓘ This might take a little bit of force to accomplish, don't be afraid to go at it with a little gusto.

Step 4

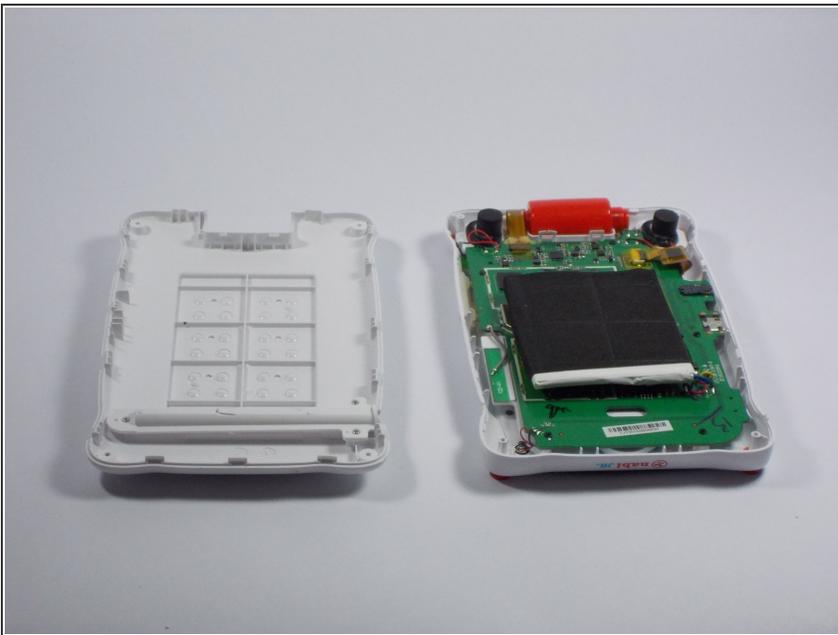

- After loosening the back cover, remove it from the device so you can get at the innards.

Step 5 — Speakers

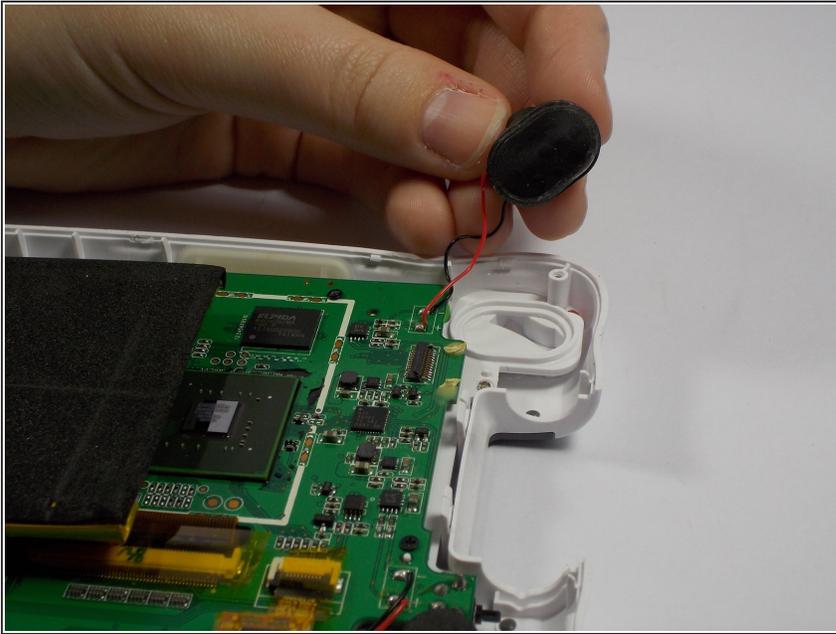

- The speakers are located near the top of the device close to the camera.
- Using a desoldering tool, remove the speakers from the pads they are soldered to.
- ⓘ Note that the red wire is removed from the pad labeled with a "+" and the black wire comes from the pad labeled with a "-".
- Solder the new speaker's wires onto their respective pads

To reassemble your device, follow these instructions in reverse order.