



Azpen A909 Back Cover Replacement

The necessary tools and steps for the proper removal of the back cover of the tablet will be described in this guide.

Written By: Karoly Fodor



INTRODUCTION

Before you begin replacing or fixing the internal components of your tablet, you will need to take the cover off. Here, we will show you the necessary steps for how to correctly remove the cover.



TOOLS:


- [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Back Cover



- Begin by unscrewing the two 1.4 mm diameter Phillips #00 head screws at the top of the device.

Step 2

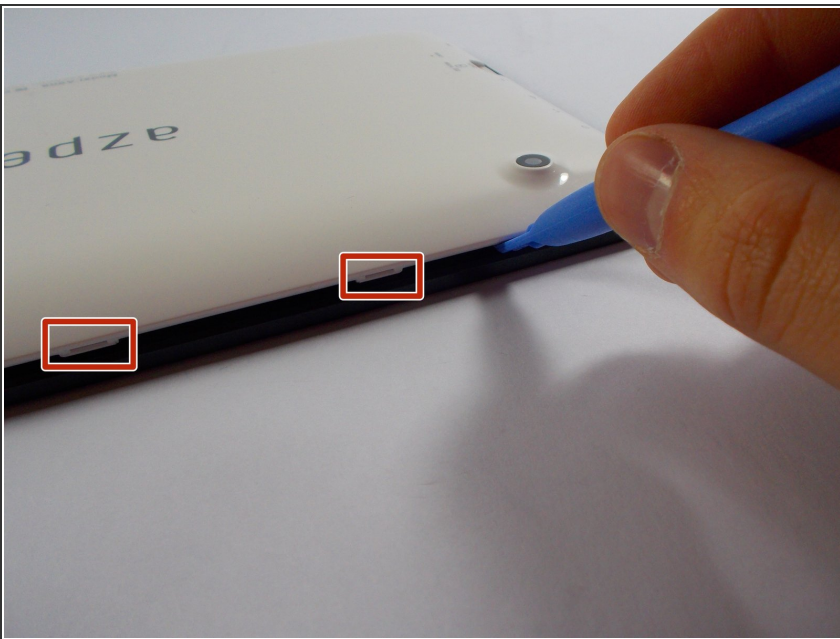

- Next, gently pry the cover off with a plastic opening tool or a similar instrument by loosening all of the anchoring points. Two of the anchoring points are circled in the image. Avoid excessive bending or pivoting, since doing so may break the anchoring points.

Step 3



- After prying open all of the anchoring points, the cover will lift off of the tablet.
- ☑ To replace the cover, simply snap it back in place and re-insert the two screws. Because the speaker is not fully fixed to the interior of the tablet, make sure that it is in the position that will allow it to fit inside the speaker mounting on the cover.

To reassemble your device, follow these instructions in reverse order.