



# Infant Optics DXR-8 Antenna Replacement

Improve range and minimize static.

Written By: Larsha Johnson



---

## INTRODUCTION

Replace the antenna to receive better signal.

---

### TOOLS:


- [Soldering Iron](#) (1)
-

## Step 1 — Antenna



- At the top right, the insulated wire exposes the antenna.

## Step 2

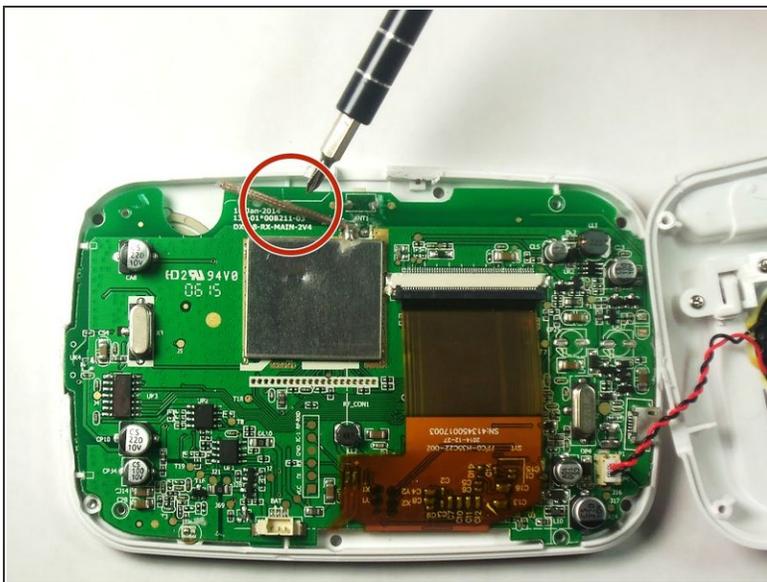

- Locate antenna connection.
- Desolder wire to remove. An antenna of a new length can be soldered to the board for improved signal strength.
- ⚠ Be careful when using soldering iron.

To reassemble your device, follow these instructions in reverse order.