




Zeki TBQG884B Camera Replacement

This step-by-step guide will help you replace a...

Written By: Natalie Holm

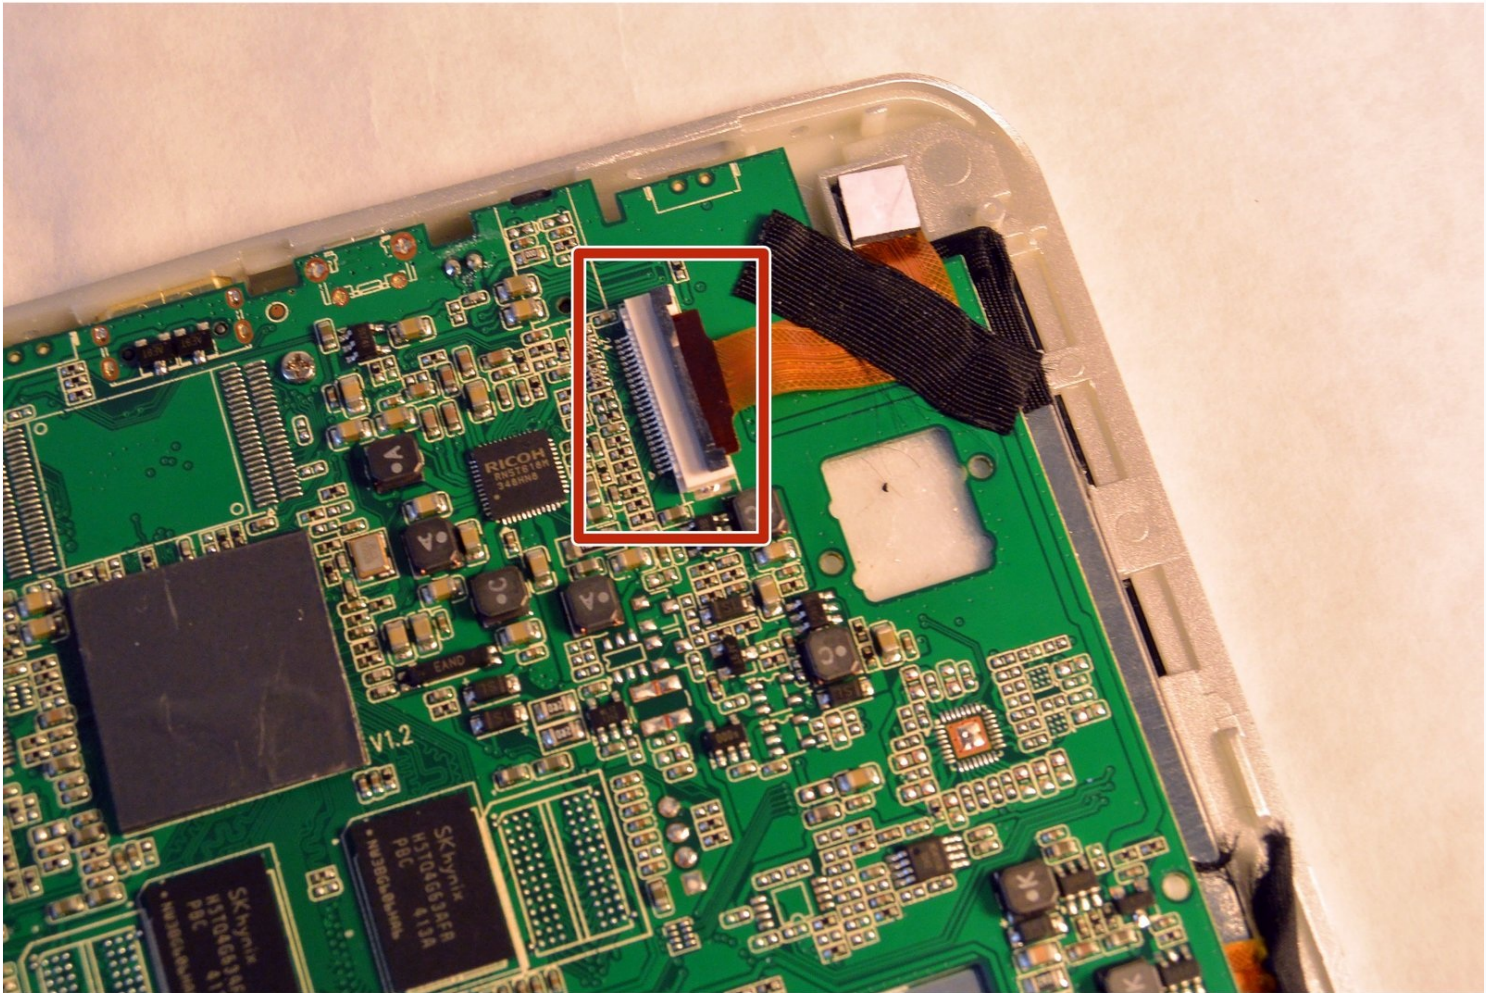

INTRODUCTION

This step-by-step guide will help you replace a damaged camera on a Zeki TBQG884B tablet.

A proper functioning camera is essential for capturing photos, scanning documents and engaging in video calls. If the camera is faulty or damaged, replacing it will help restore these functionalities.

TOOLS:

Phillips #1 Screwdriver (1)

iFixit Opening Tool (1)


Tweezers (1)

Step 1 — Rear Case




- Remove the two screws from the end of the device where the ports are located using a Phillips #1 screwdriver.

Step 2

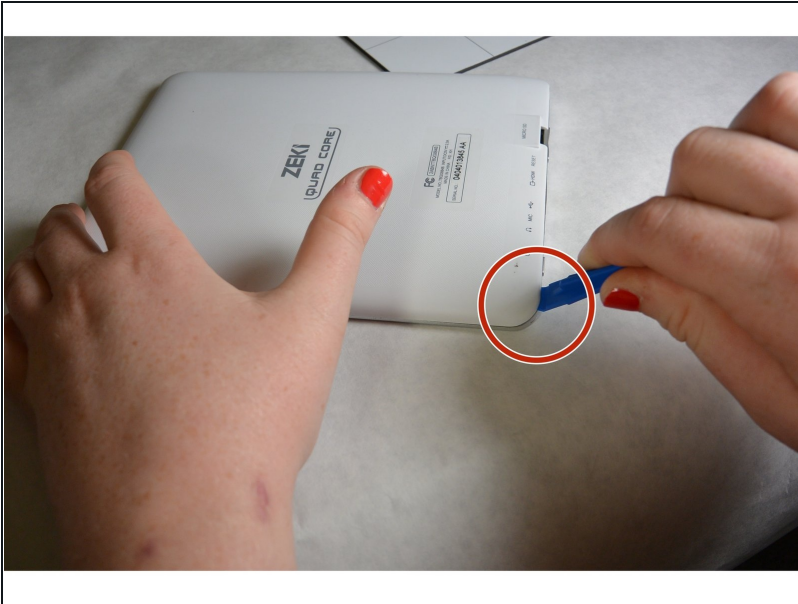



- Place the tablet down so that the screen is facing away from you.
- Insert the tip of your opening tool into the small gap between the gray and white plastic covering. Pry it open and you should hear the clips opening up.
- Gently work your way around the perimeter of the tablet's edge.

Step 3

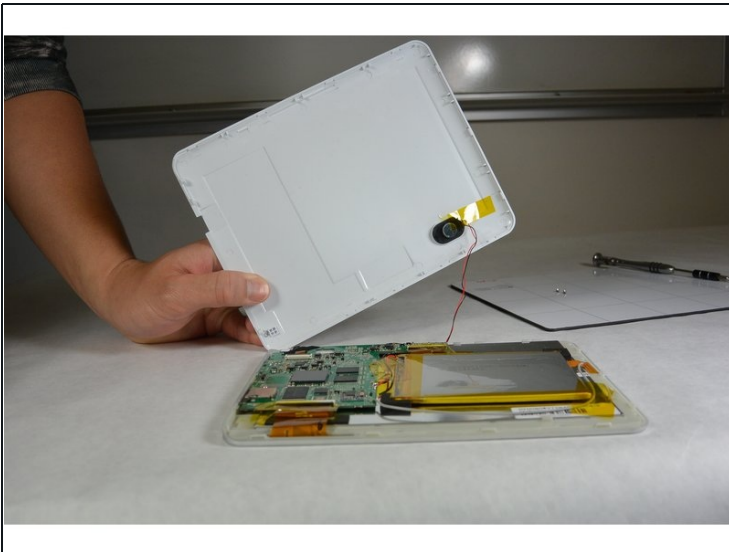

- Remove the back cover
- Remove any tape on the speaker and detach the speaker from the back plate.
 - ☑ The speaker is connected to the motherboard by two soldered wires. Don't break them when you remove the speaker.

Step 4 — Camera

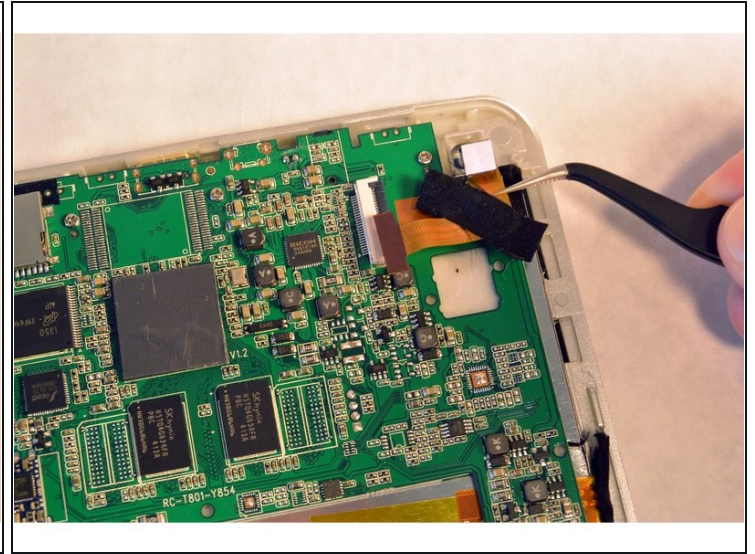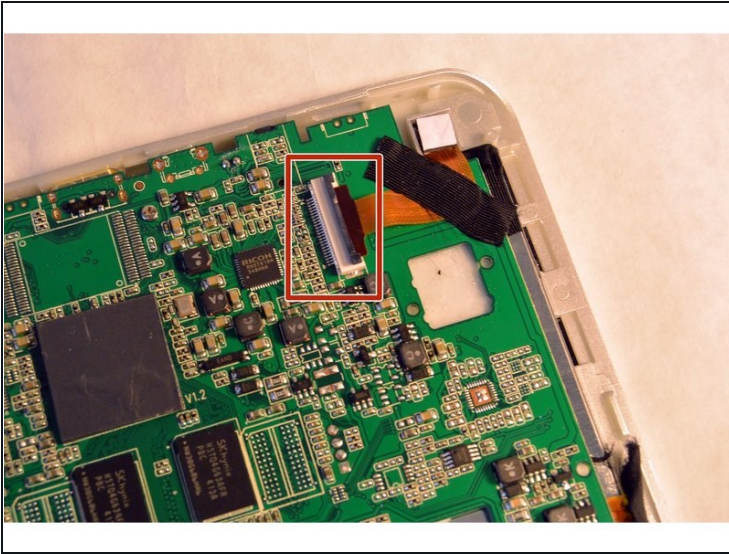

- Open the ZIF connector, the black lock part over the wire ribbon in the motherboard, and remove the wire ribbon that connects the motherboard and the camera.
- ⓘ The camera is located on the top left, above the motherboard.
- ☑ The camera is usually covered with tape or material. Peel material/tape off with [tweezers](#) for safety.

To reassemble your device, follow these instructions in reverse order.