




TiVo Series 2 TCD24008A Battery Replacement

This guide will demonstrate how to remove the battery off the motherboard of the TiVo device.

Written By: Cody Hunter

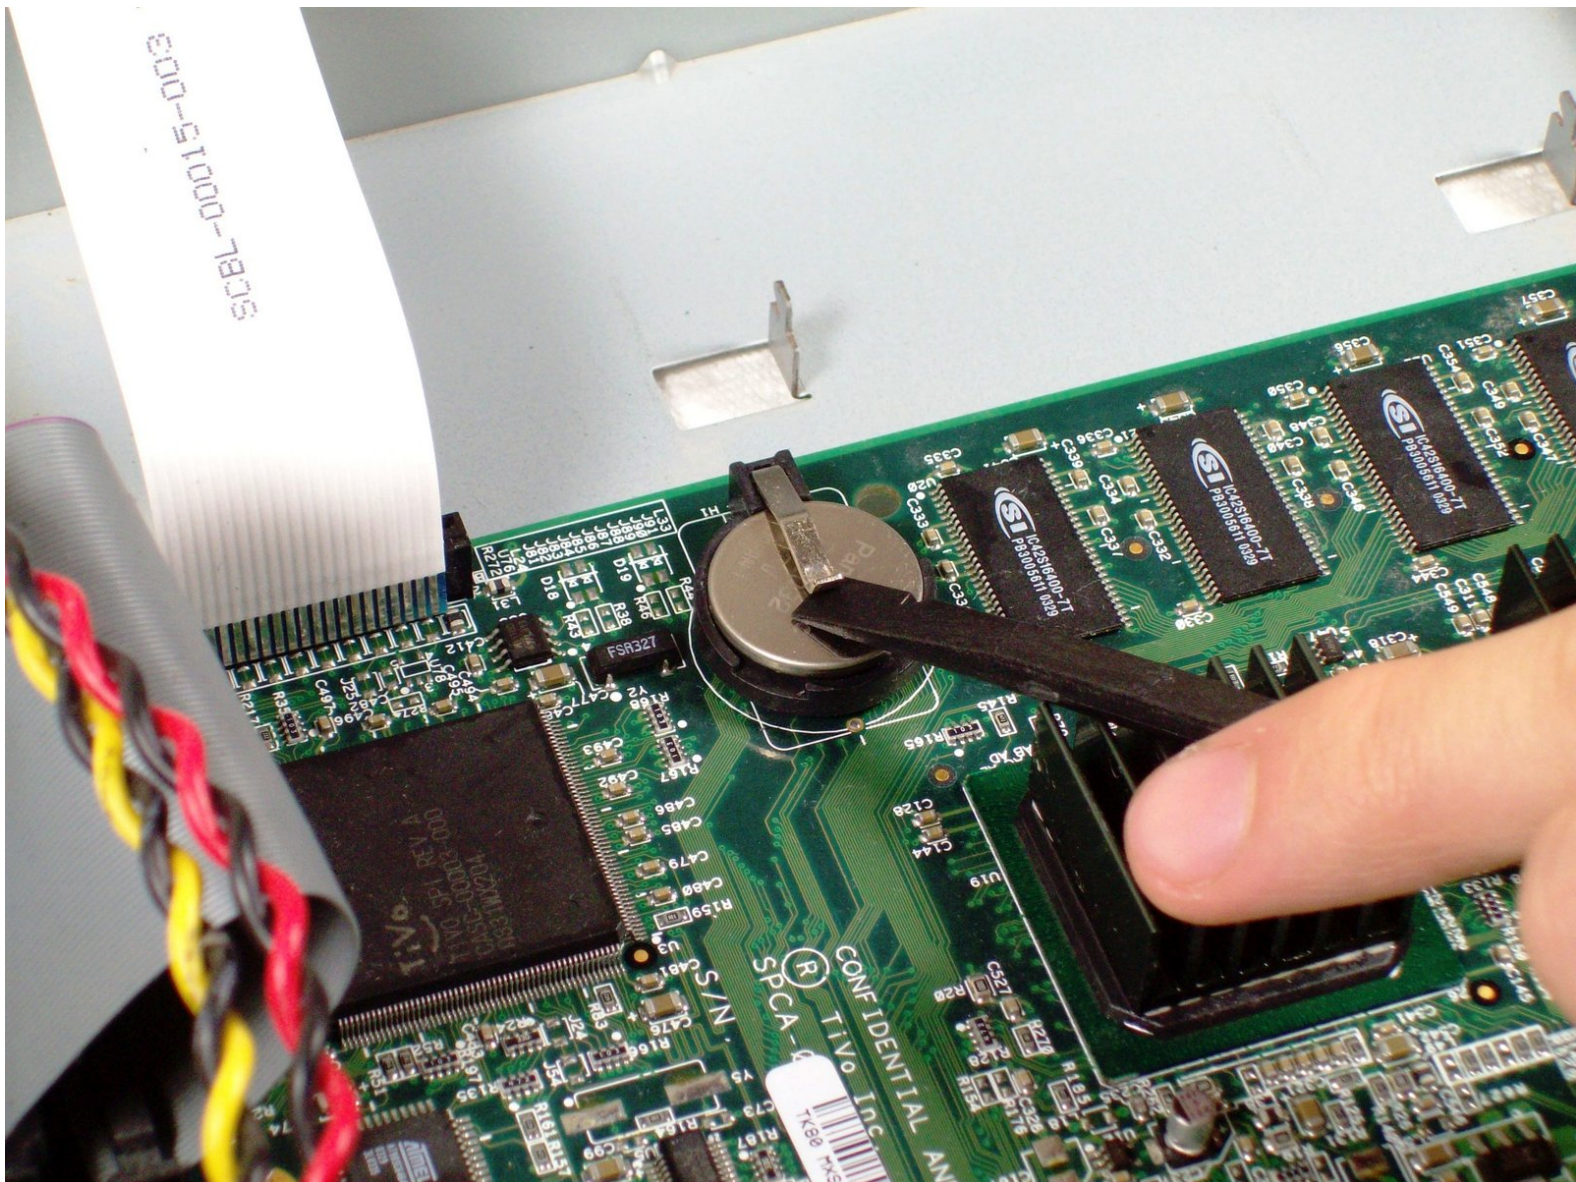

INTRODUCTION

The battery acts as an internal power source for the device. In case this battery needs to be replaced, this simple guide will walk you through the steps of removing the current battery to replace it.

TOOLS:

- [Spudger](#) (1)
 - [T9 Torx Screwdriver](#) (1)
-

Step 1 — Cover




- Unscrew the five 0.31 inch T-9 screws on the back cover.

Step 2




- Slide the cover towards the back until it is no longer under the front cover.

Step 3

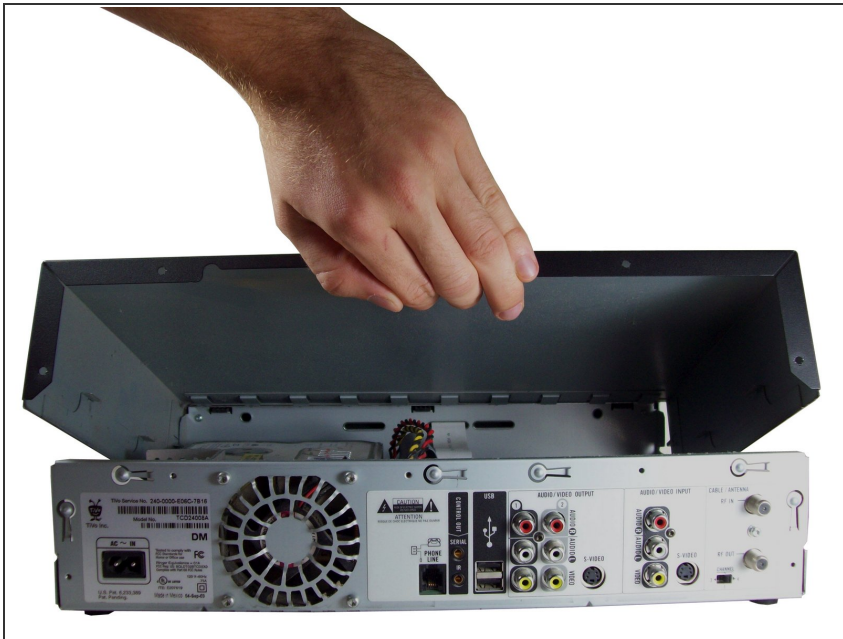


- Lift the cover up and off the device.

Step 4 — Battery

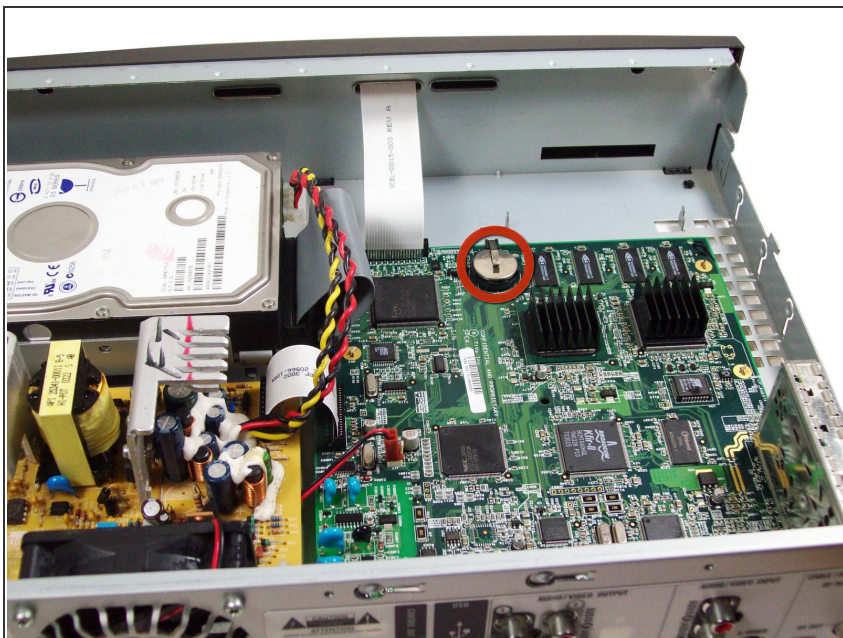


- Locate the battery on the motherboard.

Step 5

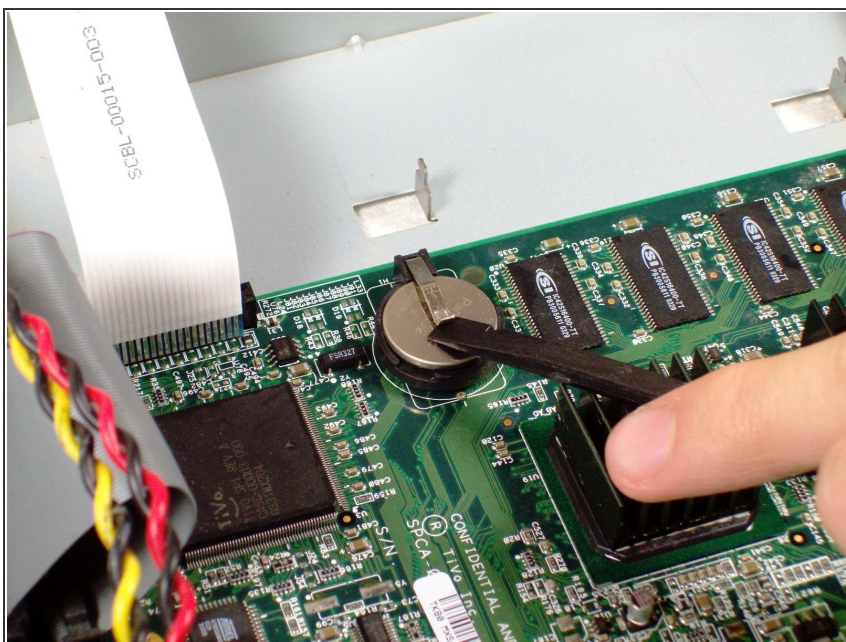

- Using the spudger, wedge the metal clip off of the top surface of the battery.

Step 6

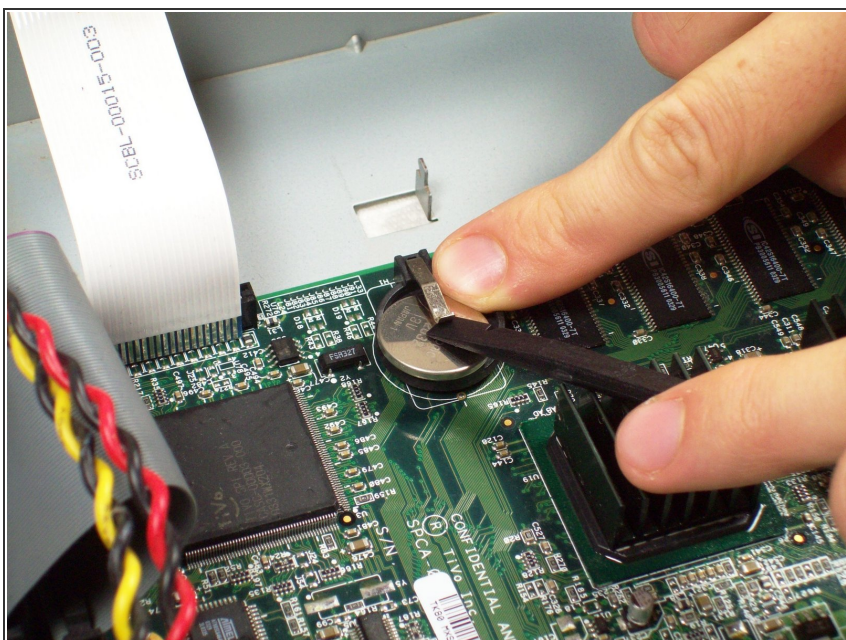

- Use your finger to push the battery sideways out of its holder.

To reassemble your device, follow these instructions in reverse order.