




Digital2 D2-861G Battery Replacement

To replace the 3.7v battery of the device.

Written By: Dalton Berg

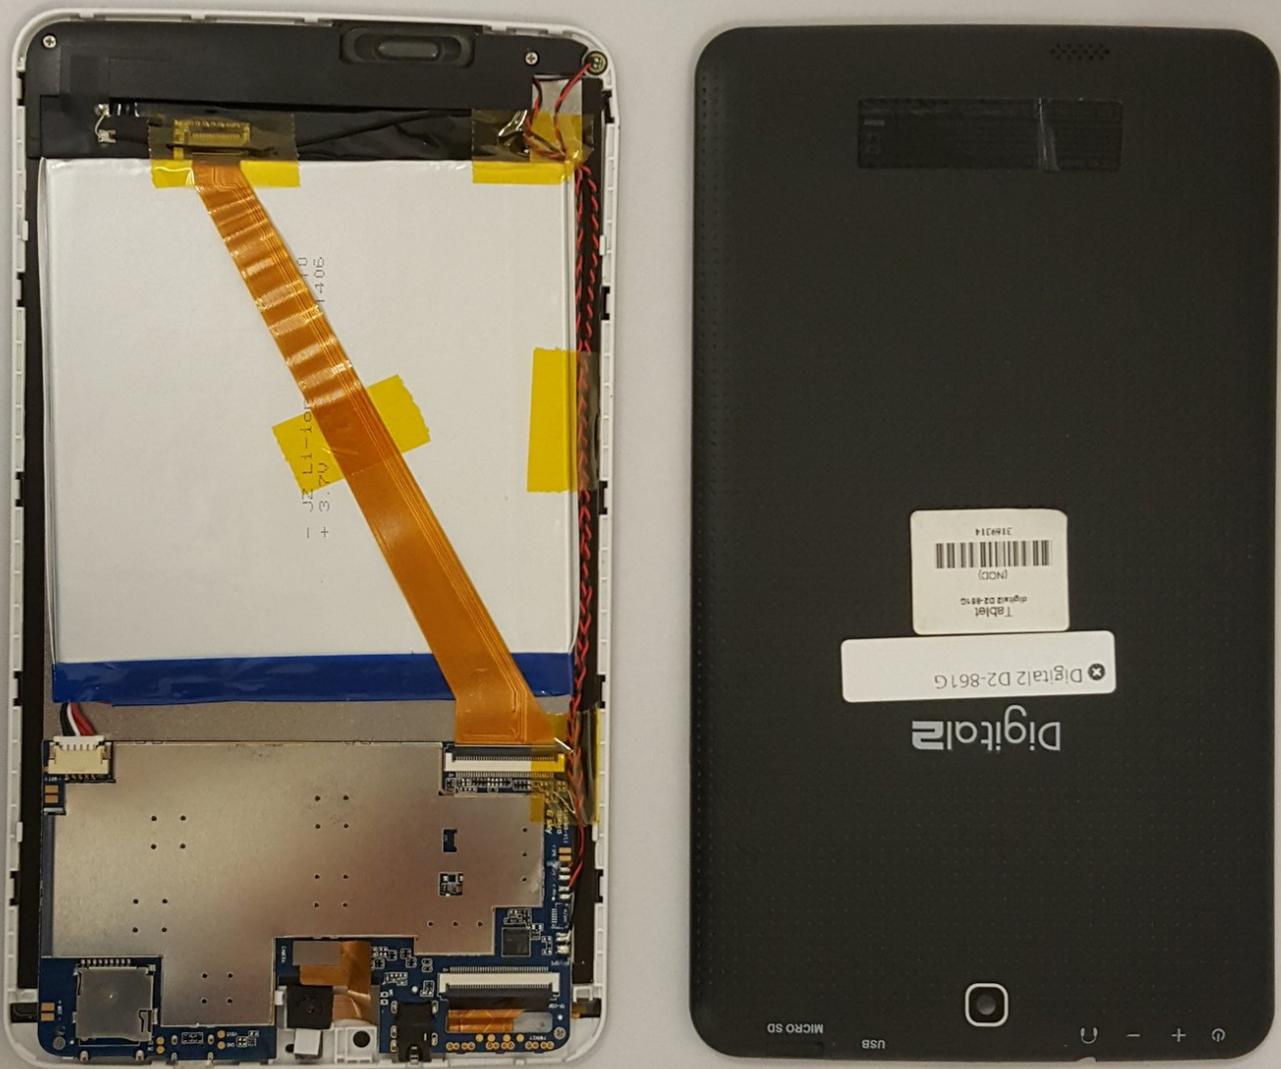

INTRODUCTION

This guide will be showing you how to replace the 3.7V battery in the back of the tablet. Be sure to carefully remove the battery from the back of the screen and do not puncture it.

Battery information:

- JZ Li-ion PL28106110

+ 3.7V 3100MAH 1406

TOOLS:



- [Spudger](#) (1)

Step 1 — Battery




- ⚠ Working on your device while powered on may result in electric shock. Make sure to *unplug* and *power down* your device before you begin.
- ⓘ Place your device on a soft cloth to avoid scratching the screen.
- Flip your device over so back panel is facing upwards

Step 2

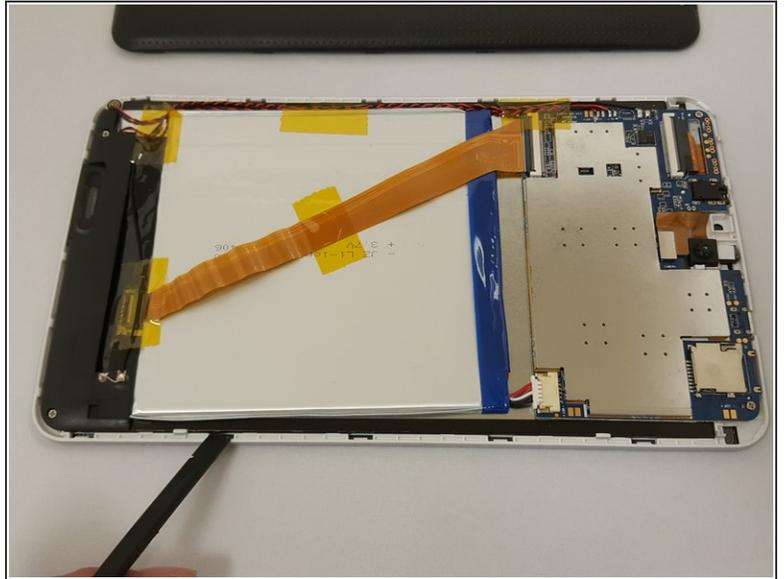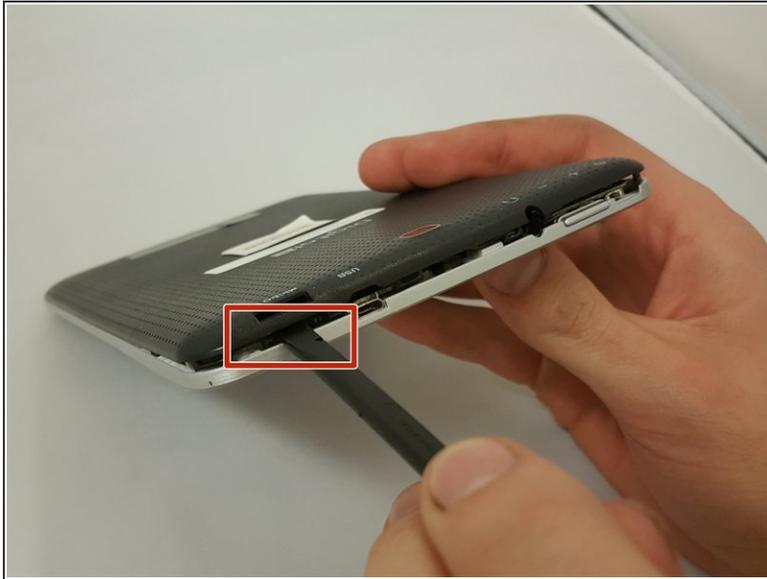



- ⚠ Do not use a lot of force as it can break the clips or the back panel.
- Insert spudger in the slot below the micro SD card
- ⓘ You should hear clips releasing as you pry along the edges.
- With the spudger tool, run along the edges of the backing undoing 20 plastic clips.

Step 3

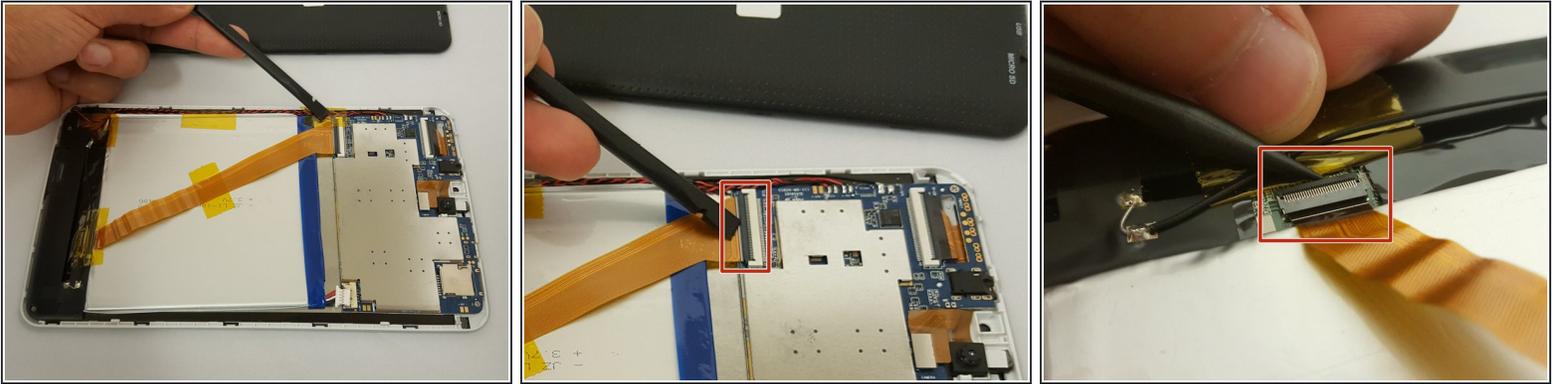

- 🔍 Look at the images to locate the *black tabs*.
- ⓘ Carefully remove the tape to avoid damaging the device.
 - Remove **ALL** the yellow tape securing the gold colored ZIF (Zero insertion force) connector and the battery. *Discard* or *save* the tape if you would like.
 - To unclip the connector. Go under the black tab with a spudger or finger nail and simply lift up.

Step 4

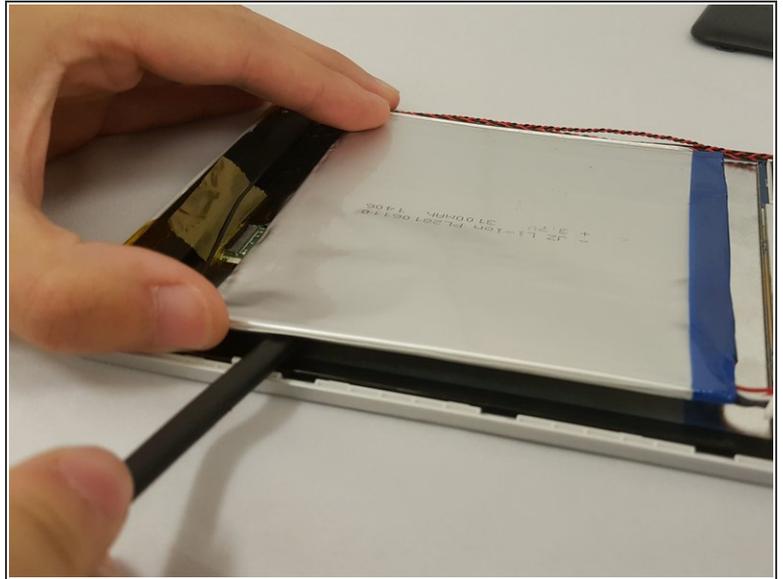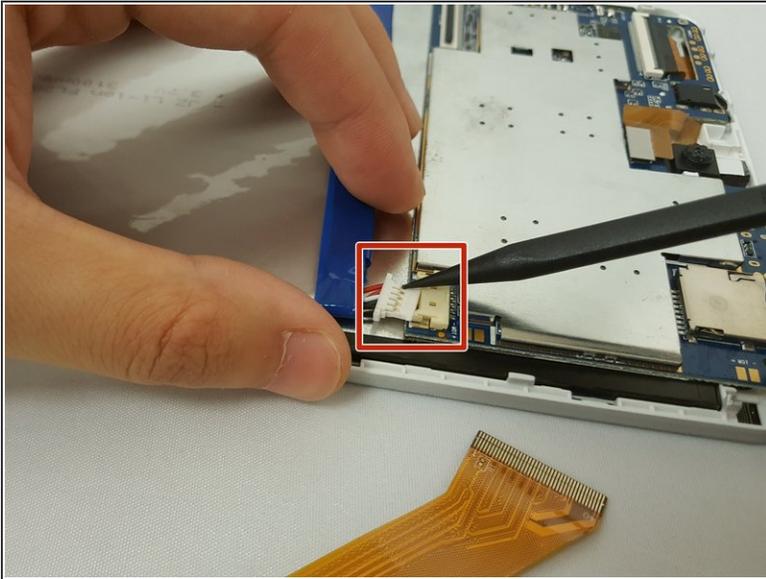

 Make sure to not bend or puncture the battery when removing it.

- Locate the bundled cable connector and disconnect it by simply pulling it gently with your hands or using a spudger.
- Use prying tools to carefully break the adhesive under the battery

To reassemble your device, follow these instructions in reverse order.