




# Samsung Rant Motherboard Replacement

This guide will provide detailed instructions on how to teardown the Samsung Rant device to get to the motherboard.

Written By: Katelynn Lee

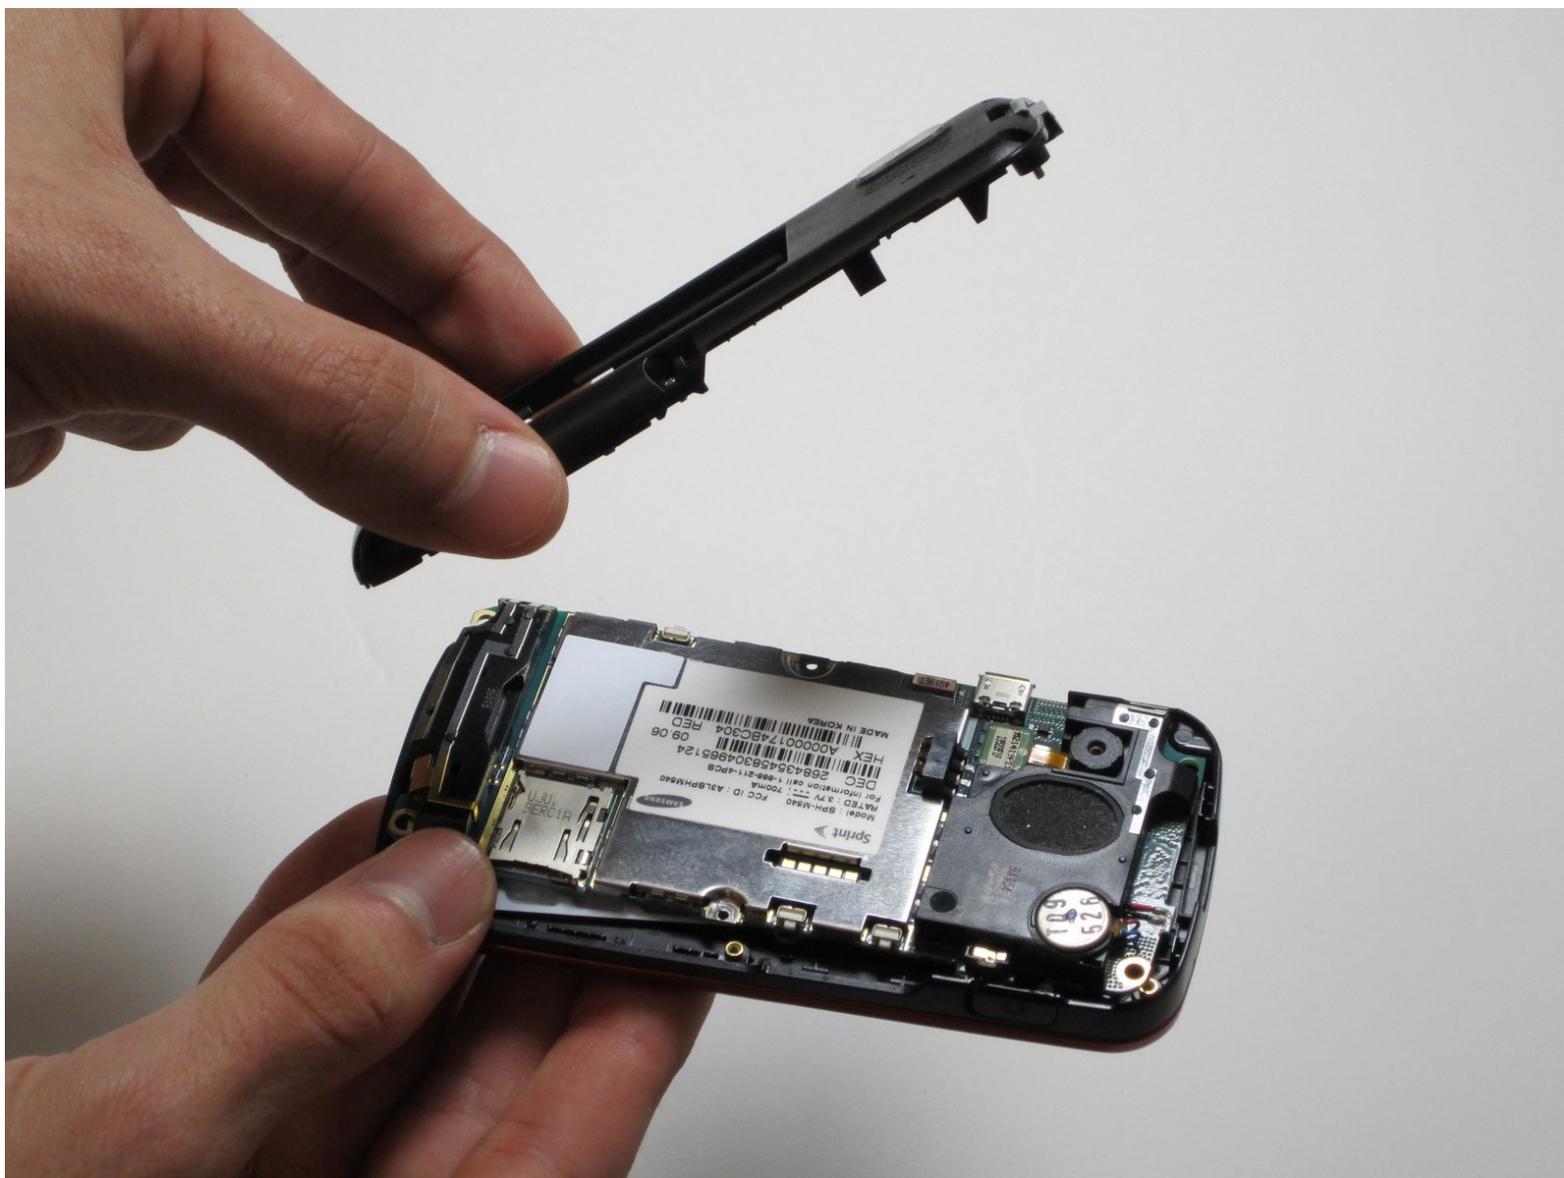

---

## INTRODUCTION


In some cases, the motherboard of a device may stop working due to installment issues or a short circuit. Either way, we have created a user-friendly guide that will show you how to fix your device

---

### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
-

## Step 1 — Motherboard

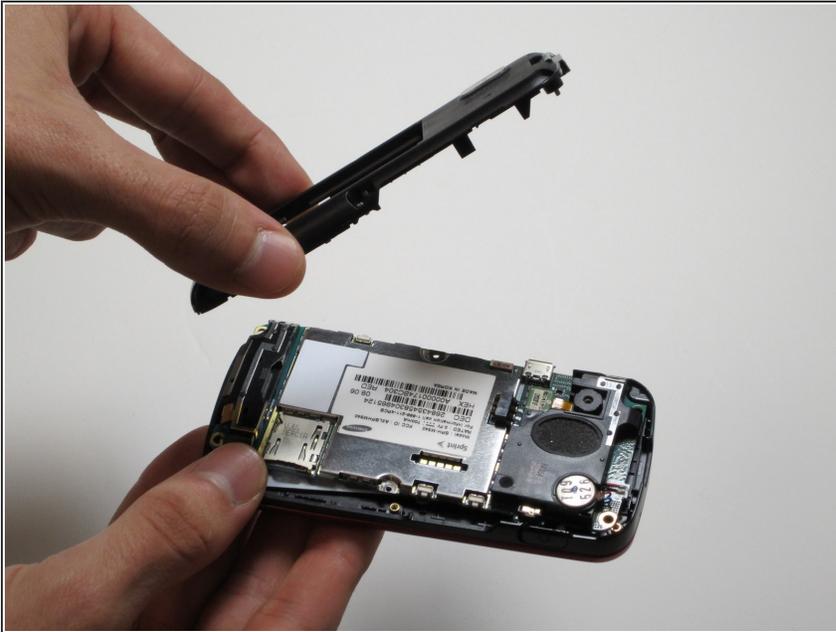

- Start by removing the back plate and battery of the phone.

## Step 2




- Using a Phillip's #00 screwdriver, unscrew the 6 screws located on the back of the device.

### Step 3




- Remove the casing from the back of the device.

### Step 4

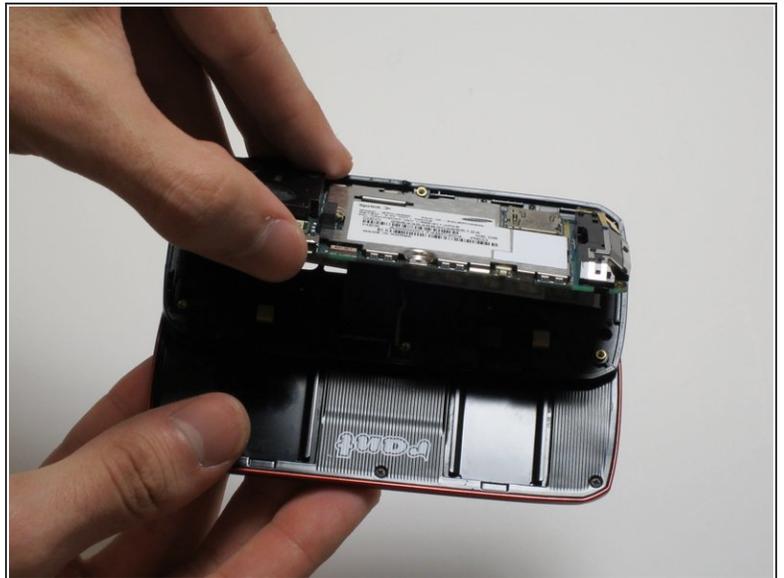

- Next, separate the back component from the keyboard and screen, exposing the middle of the phone and keyboard pad.

## Step 5

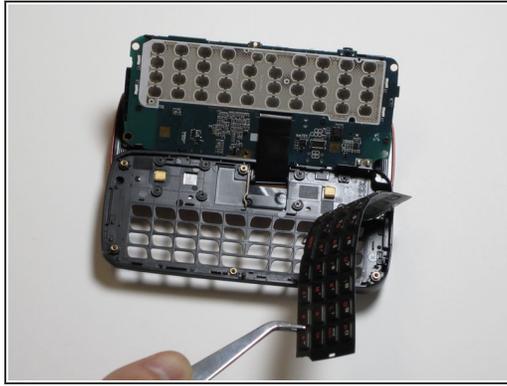

- Last, unscrew the remaining screws and remove the keyboard padding, exposing the motherboard.

To reassemble your device, follow these instructions in reverse order.