




Dell Vostro 15 7570 Memory Module Replacement

Written By: Johnathan Hammond




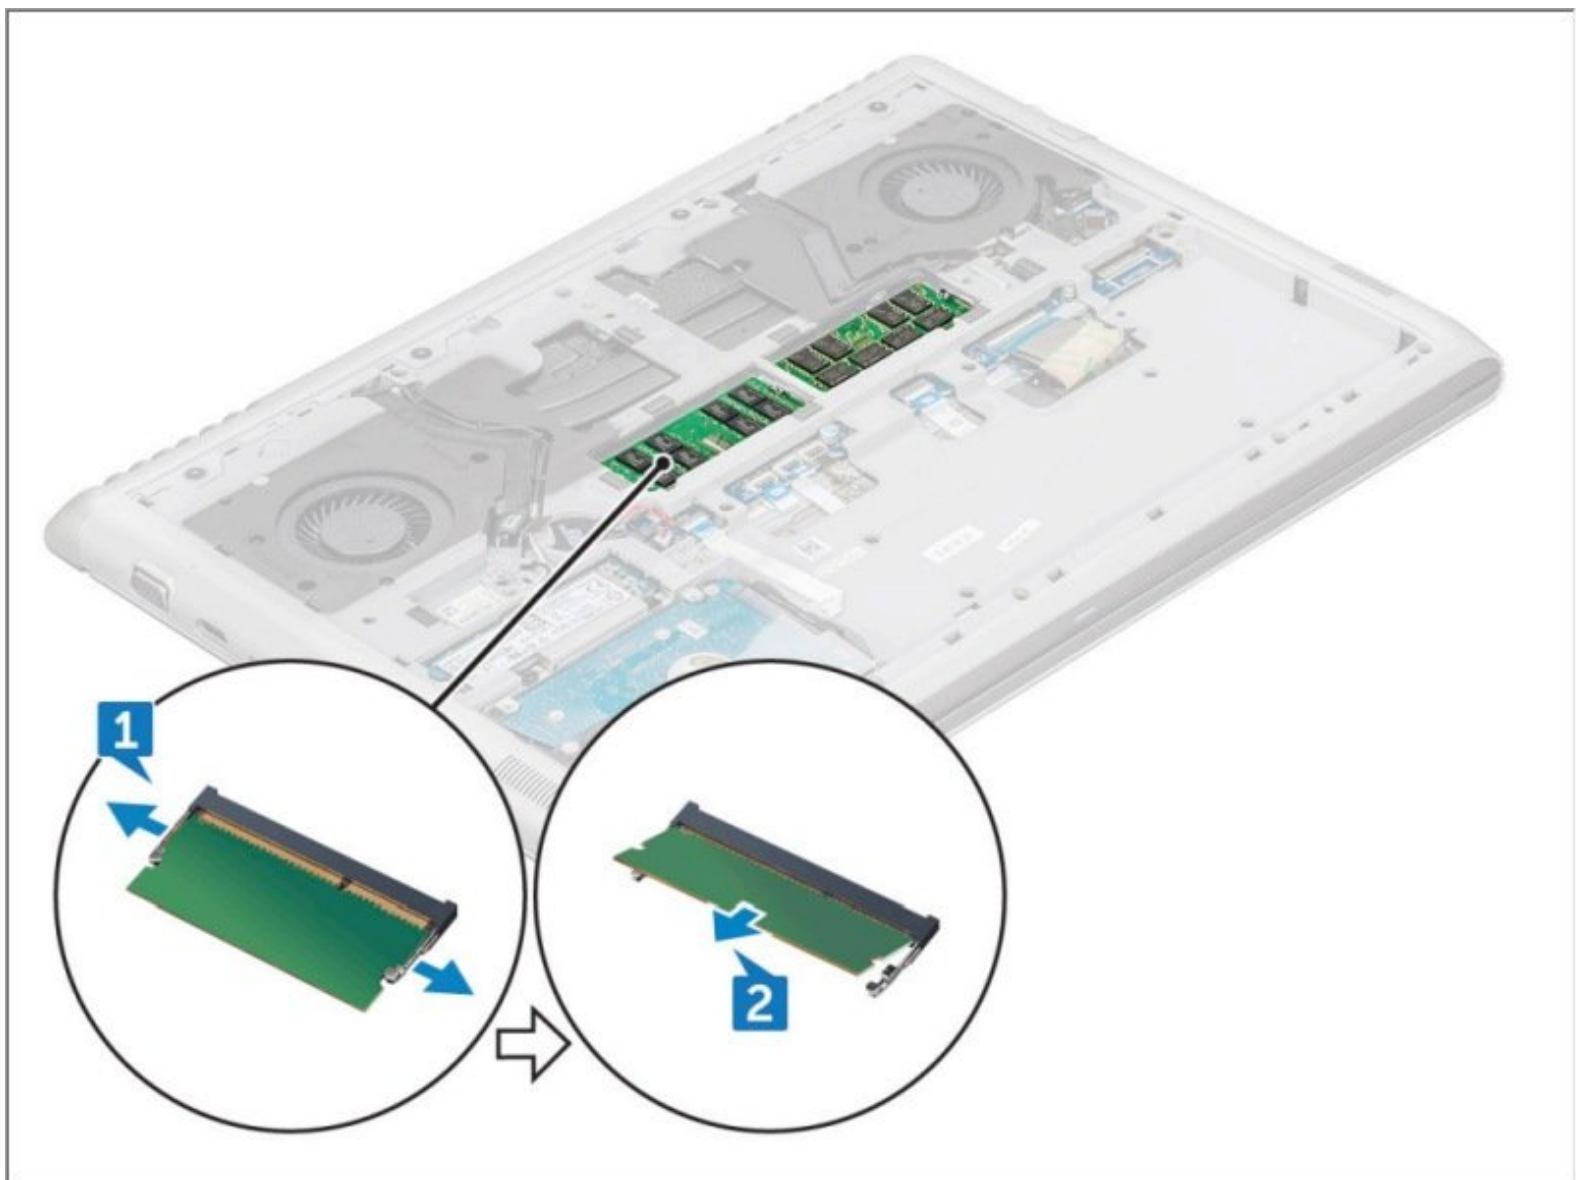

TOOLS:

- [Spudger](#) (1)
- [Phillips #0 Screwdriver](#) (1)
- [Phillips #1 Screwdriver](#) (1)

Step 1 — Base Cover

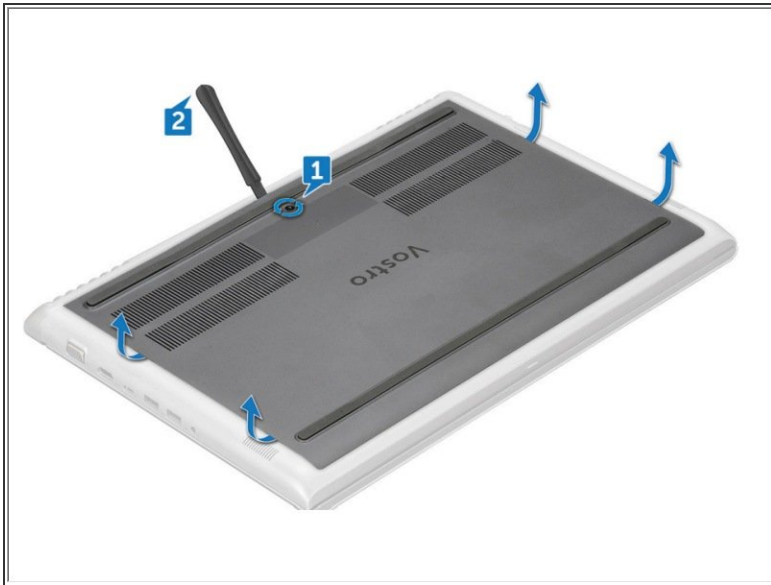


- Loosen the M2.5x2+3.5 captive screws that secure the base cover to the computer [1].
 - Pry the base cover from the edge [2].
 - Lift the base cover away from the computer

Step 2 — Battery (model 99NF2)



- Disconnect the battery cable from the connector on the system board [1].
- Remove the M2x3L screws that secure the battery to the computer [2].

Step 3 — Memory Module

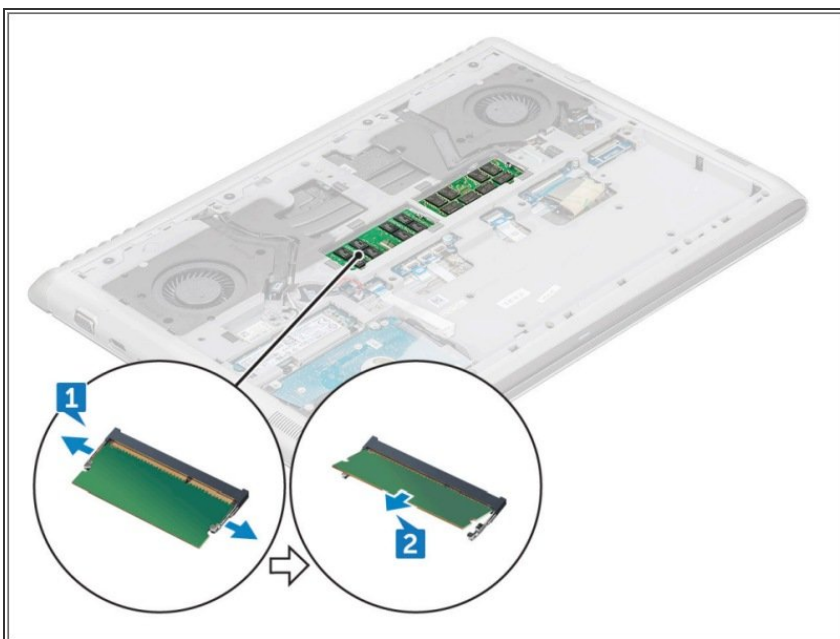

- Pry the clips securing the memory module until the memory pops-up [1]
- Lift the memory module away from the connector [2].

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2021-03-14 10:03:58 AM (MST).

