

sonyo pro extraX multiverse projector bulb replacement Replacement

replacing a spent or defective bulb

Written By: Matt Block



This document was generated on 2021-05-15 03:47:31 AM (MST).

Step 1 — bulb replacement



Remove one 9mm screw with a Phillips 2 screwdriver.


Step 2



• Use a spudger to lift up the panel, then set it off to the side.

This document was generated on 2021-05-15 03:47:31 AM (MST).

Step 3

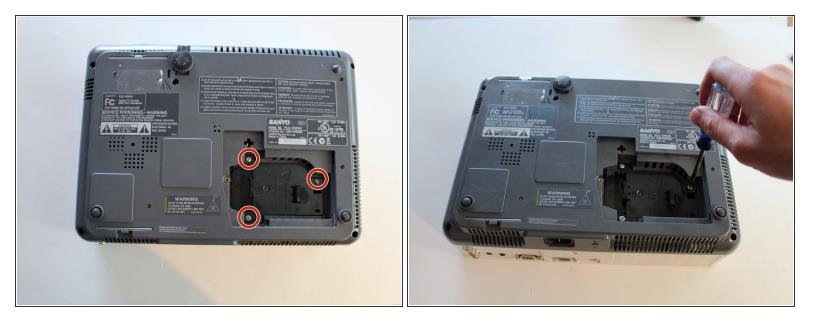

Remove three 11mm screws with a Phillips 2 screwdriver.

Step 4



• Pinch on the two plastic clips and lift up to remove the bulb completely.

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2021-05-15 03:47:31 AM (MST).