



Motorola MOTO W755 Cell Phone Key Pad Cover Replacement

This guide shows how to replace the keypad cover.

Written By: Roberta Glenn



INTRODUCTION


Improve keyboard function by replacing keypad cover for your Motorola MOTO phone.



TOOLS:

- [iFixit Opening Tools](#) (1)
 - [T5 Torx Screwdriver](#) (1)
-

Step 1 — Main Logic Board

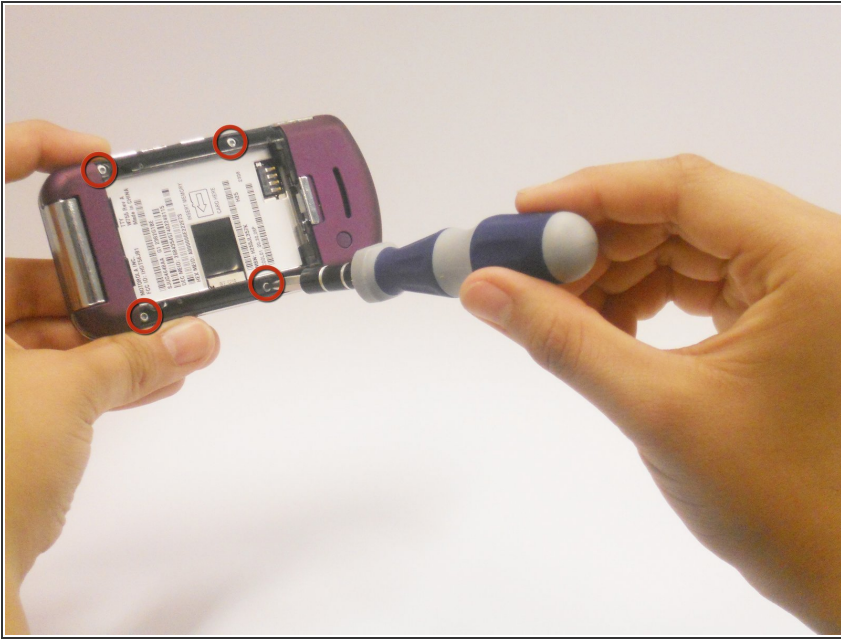


- Using the T5 Torx-screwdriver, remove the four 5.5 mm screws on the back panel.

Step 2




- Using a plastic opening tool, carefully peel back the rubber strip located at the bottom of the keypad
- Remove the two T5 Torx-screws underneath the rubber strip using the T5 Torx-screwdriver

Step 3

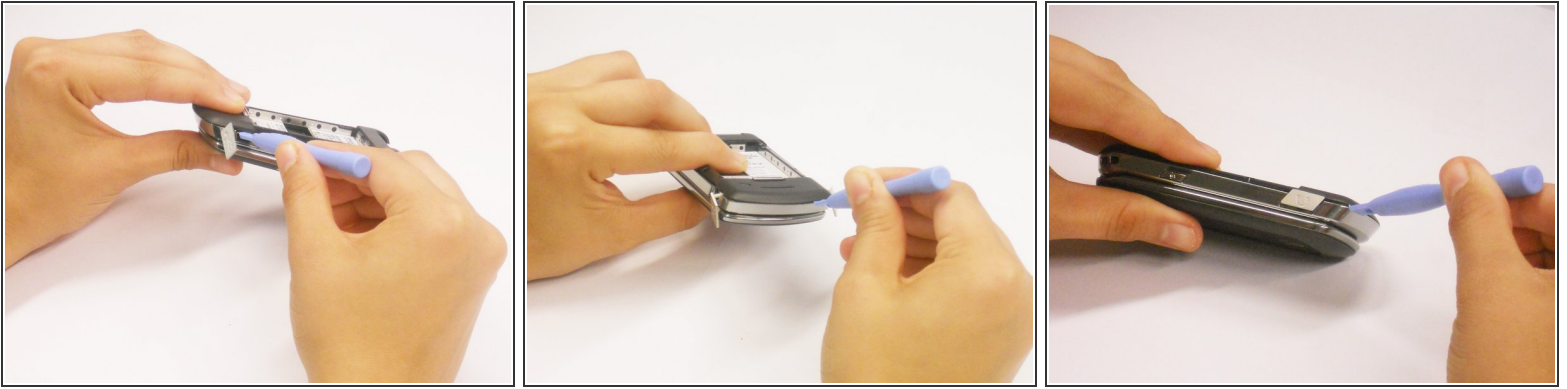

- Using the flat end of the plastic opening tool, insert it in the gap between the charging port and plastic at the bottom left side of the phone.
- Slide the opening tool around the phone clockwise until you reach the audio port.
- Twist the opening tool until the plastic pops off from the body of the phone. This make require a small amount of force.

Step 4

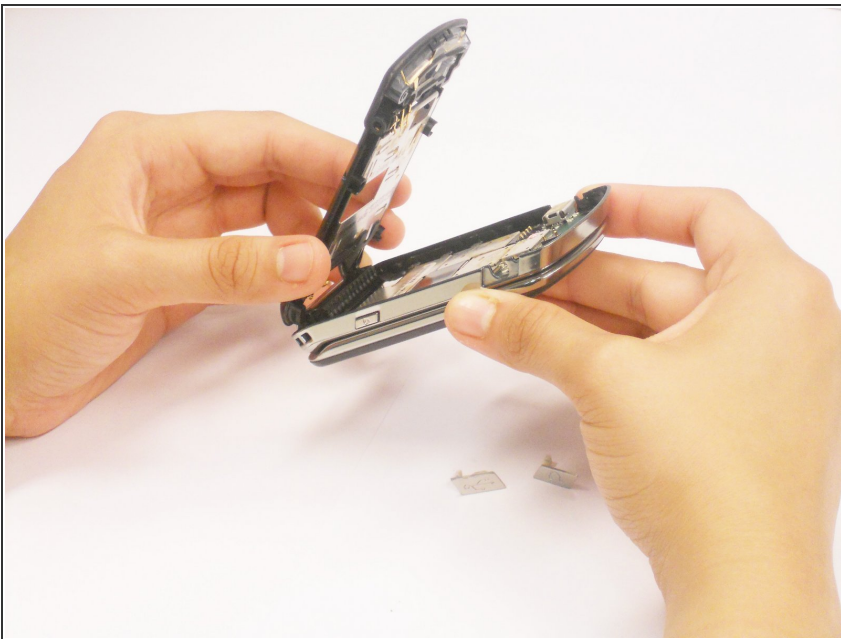

- Remove the plastic covering completely from the body of the phone.

Step 5



- Using the plastic opening tool, carefully unclip the cable ribbon from the main logic board. Be sure not to tear it because the flex is very fragile.
- Remove the main logic board.

Step 6 — Key Pad Cover



- After removing the main logic board, use the plastic opening tool to poke from the back and peel off the key pad cover.

To reassemble your device, follow these instructions in reverse order.