




Motorola Droid RAZR Back Cover Replacement

Removing the Kevlar back cover from the Droid RAZR.

Written By: David Hodson

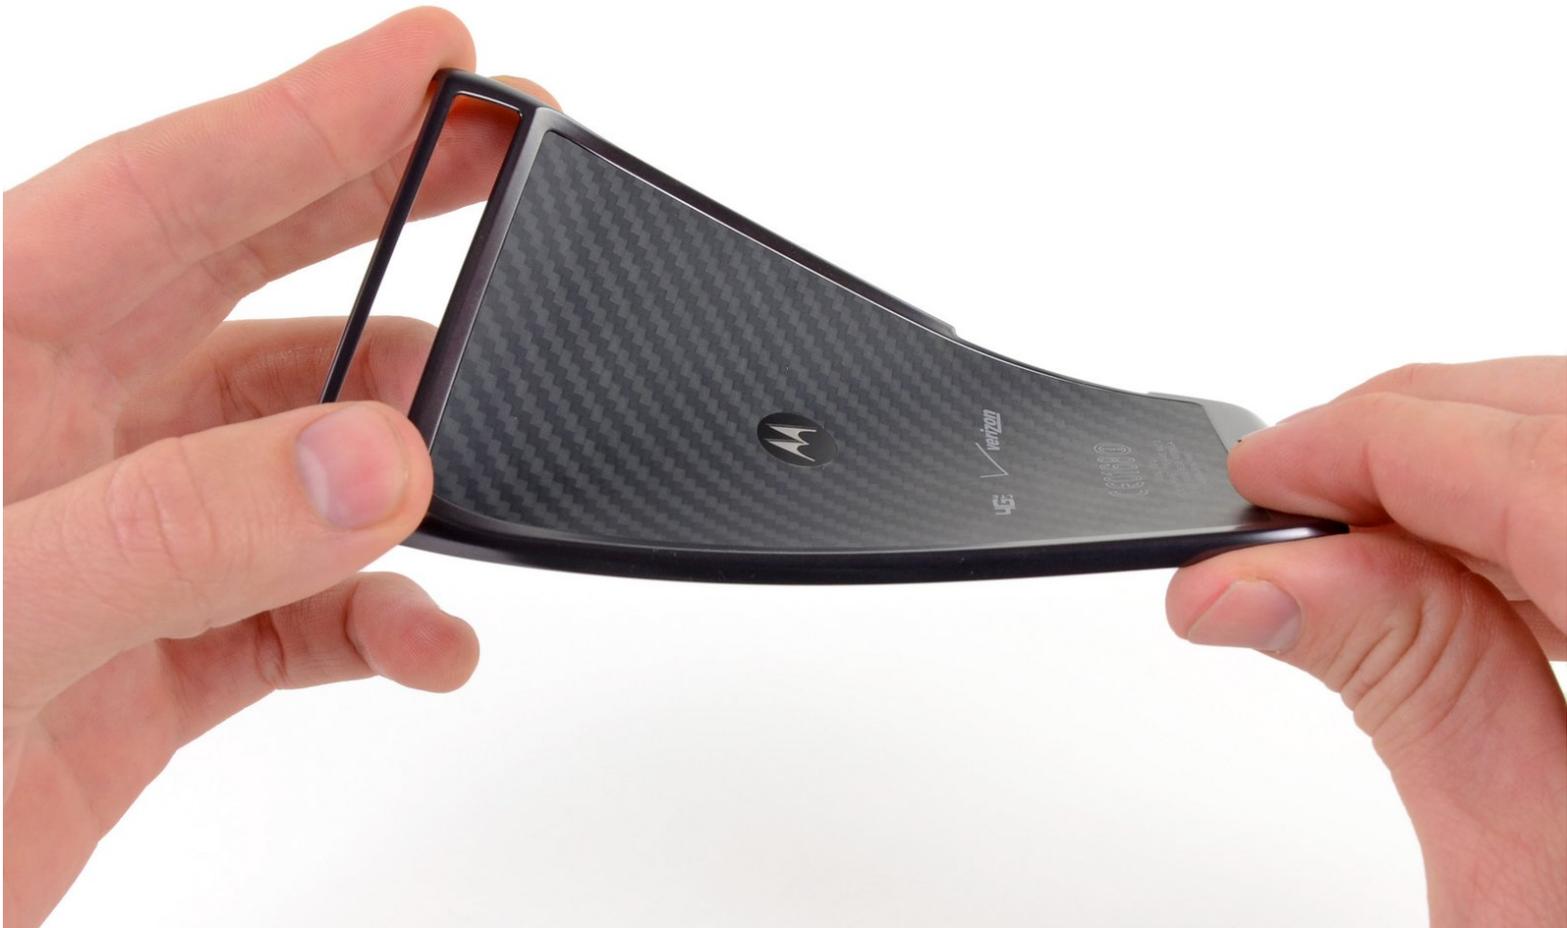

INTRODUCTION

Replace your nifty Kevlar-clad back cover that you recently discovered isn't actually bulletproof.

TOOLS:

- [iFixit Opening Tools](#) (1)
-

Step 1 — Back Cover



- Insert a plastic opening tool between the back cover and rear case at the lower left edge of the back cover.
- Pry the back cover up with the plastic opening tool to free the plastic clips.
- Continue prying along the left edge of the back cover towards the top of the phone.

Step 2



- Work the plastic opening tool across the top of the back case to free the plastic clips.
- ⚠ The top edge of the back case is very thin. Pry carefully to avoid cracking or snapping it.
- Continue prying down the right side of the back cover to free the remaining clips.

Step 3



- Pull the back cover away from the phone to remove it.
- ⓘ The back cover is attached to the battery with a generous amount of adhesive, so you may have to use quite a bit of force to separate the two pieces.
 - ⚠ The battery must remain in the phone and not come off with the back cover or you will break the power lead.
- ⓘ Since the back cover is made of Kevlar, it can handle a fair amount of twisting and tugging without breaking.

To reassemble your device, follow these instructions in reverse order.